

K O N I N K L I J K   N E D E R L A N D S  
M E T E O R O L O G I S C H   I N S T I T U U T

D e   B i l t

WETENSCHAPPELIJK RAPPORT  
W.R. 76-7

A.P. van Ulden,  
J.G. van der Vliet en J. Wieringa

Temperature and wind observations  
at heights from 2 m to 200 m  
at Cabauw in 1973

Waarnemingen van temperatuur en wind  
op hoogten van 2 m tot 200 m  
te Cabauw in 1973

De Bilt, 1976

Publikationennummer: K.N.M.I. W.R. 76-7 (MO-B)

U.D.C.: 551.507.7 :  
551.524.4 :  
551.554

ABSTRACT:

The 215 m high meteorological mast in Cabauw, the Netherlands, is briefly described with respect to construction, instrumentation and surroundings. Tables of checked half-hourly averages of temperature at 2, 9, 20, 40, 80, 120, 160 and 200 m height, and of wind speed and direction at 10, 80 and 200 m, are presented for the full year 1973, with information on the complete measurement program.

Table of contents:

	page
Introduction and terrain description	3
Mast construction	7
Measurement program in 1973	9
Temperature and wind instrumentation	10
Data control and correction	11
Acknowledgements, references, minor-tables	12
Half-hourly average profiles of temperature and wind in 1973 (legend and specimen table)	16

The full tables are contained in a 184-page supplement to this report. If the supplement is not included with this report copy, and if you need it for research purposes, please send this report page (abstracts and table of contents) to the Director of Scientific Research, Royal Netherlands Meteorological Institute, De Bilt, the Netherlands. Your report page will then be returned to you with a copy of the supplement, if still available.

SAMENVATTING:

De 215 m hoge meteorologische meetmast te Cabauw wordt kort beschreven, zowel de konstuktie en instrumentatie als de omgeving. Tabellen van gekontroleerde halfuurgemiddelen van de luchtemperatuur op de hoogten 2, 9, 20, 40, 80, 120, 160 en 200 m, en van windsnelheid en windrichting op de hoogten 10, 80 en 200 m worden gepresenteerd voor het gehele meetjaar 1973, tezamen met een overzicht van de overige tijdens dat jaar verrichte metingen.

Inhoudsopgave:

blz.

Inleiding en terreinbeschrijving	3
Mastconstructie	7
Meetprogramma in 1973	9
Temperatuur- en wind-instrumentatie	10
Controle en correctie der meetgegevens	11
Nwoord, referenties, kleine tabellen	12
Halfuurlijks gemiddelde temperatuur- en windprofielen in 1973 (beschrijving tabel, en voorbeeld-blad)	16

De volledige getabellleerde temperatuur- en wind-gegevens zijn opgenomen in een supplement (184 blz.), waarvan slechts een beperkt aantal beschikbaar is. Indien dit rapport-exemplaar geen supplement bevat, en indien U de gegevens voor onderzoeksdoeleinden nodig heeft, zend dan dit blad van het rapport (samenvatting en inhoudsopgave) aan de Directeur Wetenschappelijk Onderzoek, Koninklijk Nederlands Meteorologisch Instituut, De Bilt. U zult Uw rapport-blad terug ontvangen tezamen met een exemplaar van het genoemde supplement, zolang de voorraad strekt.

## INTRODUCTION AND TERRAIN DESCRIPTION.

Since December 1972 the Royal Netherlands Meteorological Institute (K.N.M.I.) operates a 215 m high meteorological mast at Cabauw. This measurement platform is the chief experimental tool of the Physical Meteorology Research Division, as a support to planetary boundary layer research activities for subjects like air pollution dispersion, aeronautical meteorology, wind loading on structures, cooling tower plumes, evaporation and mesoscale climatology. The experience obtained through the operation of an 80 m mast near Vlaardingen from 1966 to 1973 (Rijkkoort et al. 1970, Raaff 1975) has been useful towards the design of the Cabauw mast, which was built in 1970.

The 215 m mast is located at 51.972 °N and 4.927 °E near the village of Cabauw in the municipality of Lopik, 5 km Northeast of the last buildings of the small town Schoonhoven (see map, fig. 1). The mast location is within easy servicing distance (30 min. drive) from the Meteorological Institute in De Bilt, which is also a regular radiosonde station. Other surrounding weather stations are indicated on fig. 1, with synoptic station numbers if applicable. The mast stands well away from air traffic corridors, and is 8 km distant from the 383 m high TV tower at IJsselstein and its surrounding antenna park.

The surroundings of the mast are topographically flat within a radius of 20 km at least in all directions, and consist of meadows and pastures with occasional lines of trees, river dikes and small villages. Close to the mast (see map, fig. 2) an almost obstacle-free zone of ~2 km length and ~1 km width lies in the SW direction (fig. 4), which is the most frequent wind direction. In contrast to this, at the East side of the mast an area of ~3 km length and ~1 km width is covered with small orchards and the low-rise houses of the village Lopik. In 1973, this generally rough area terminated near the mast in a row of poplars along the Zijdeweg road; these poplars were cut down in March 1975. Typical surface layer roughness lengths are 0.05 m to the SW, 0.25 m to the East, and 0.15 m in all other directions.

The lowest boom level in the 215 m mast is at 20 m. Measurements at lower levels were made in 1973 in an observation area 70 m South of the mast foot (fig. 3). An estimate of the roughness surrounding this particular area was made by evaluating the gustiness at 10 m height in strong winds (Wieringa 1976), and the results of this investigation are given in Table A in the form of roughness lengths.

A marked roughness difference is found between summer and winter because all trees in the area are deciduous.

Care has been taken not to disturb unduly the surface layer on the KNMI terrain with unnecessary obstacles. For example, the six anchor blocks needed for guying the mast have been sunken flush with the surface (fig. 3), and the parking area has been surfaced with 25% stone and 75% grassy earth. At the NW side of the mast an area of 100 x 100 m has been equalized, maintaining the original soil profile (see fig. 2). In the future that area will be reserved for measurements of soil heat flux, evapotranspiration and other components of the energy balance.

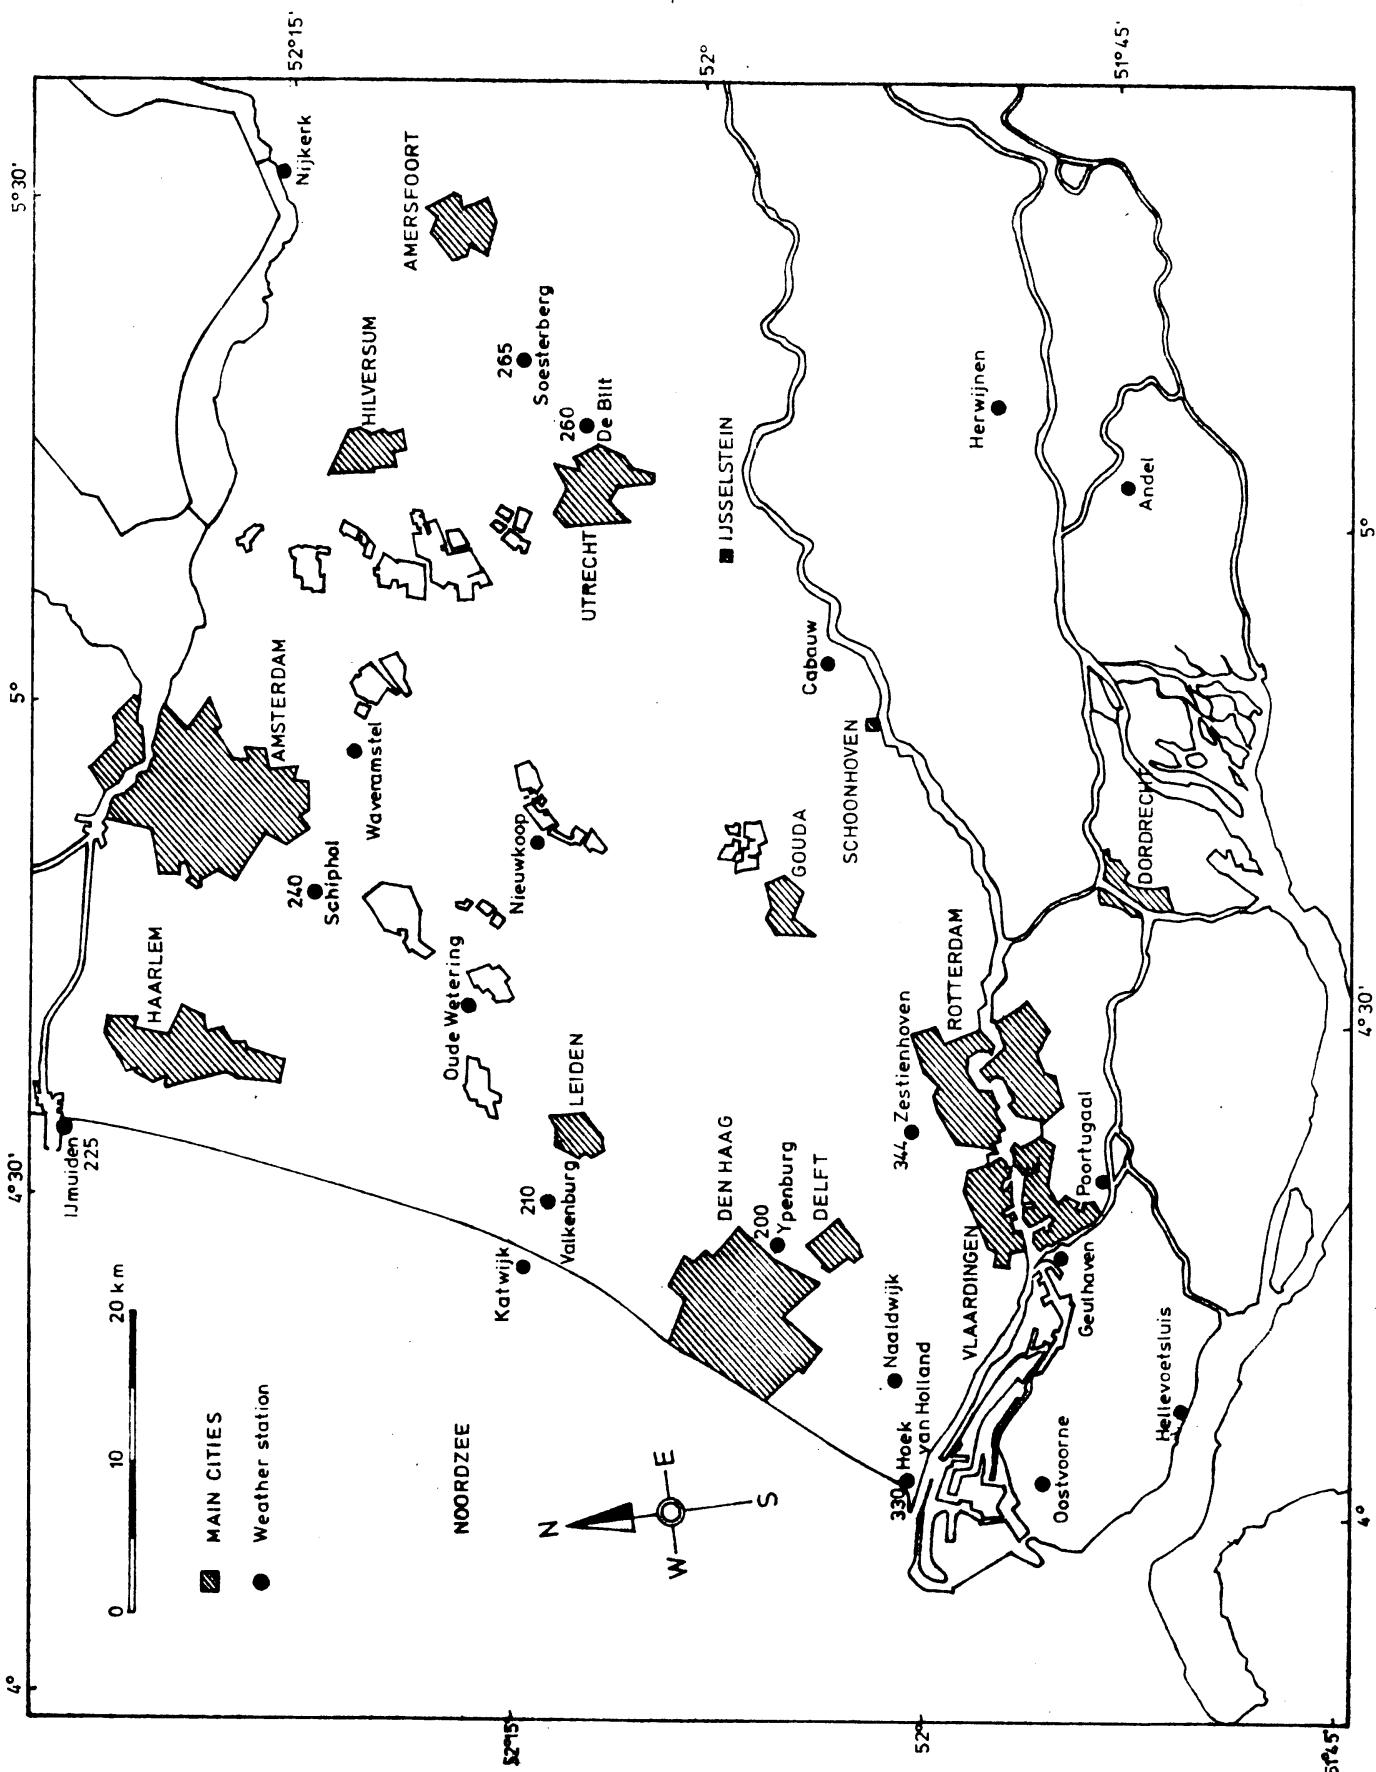
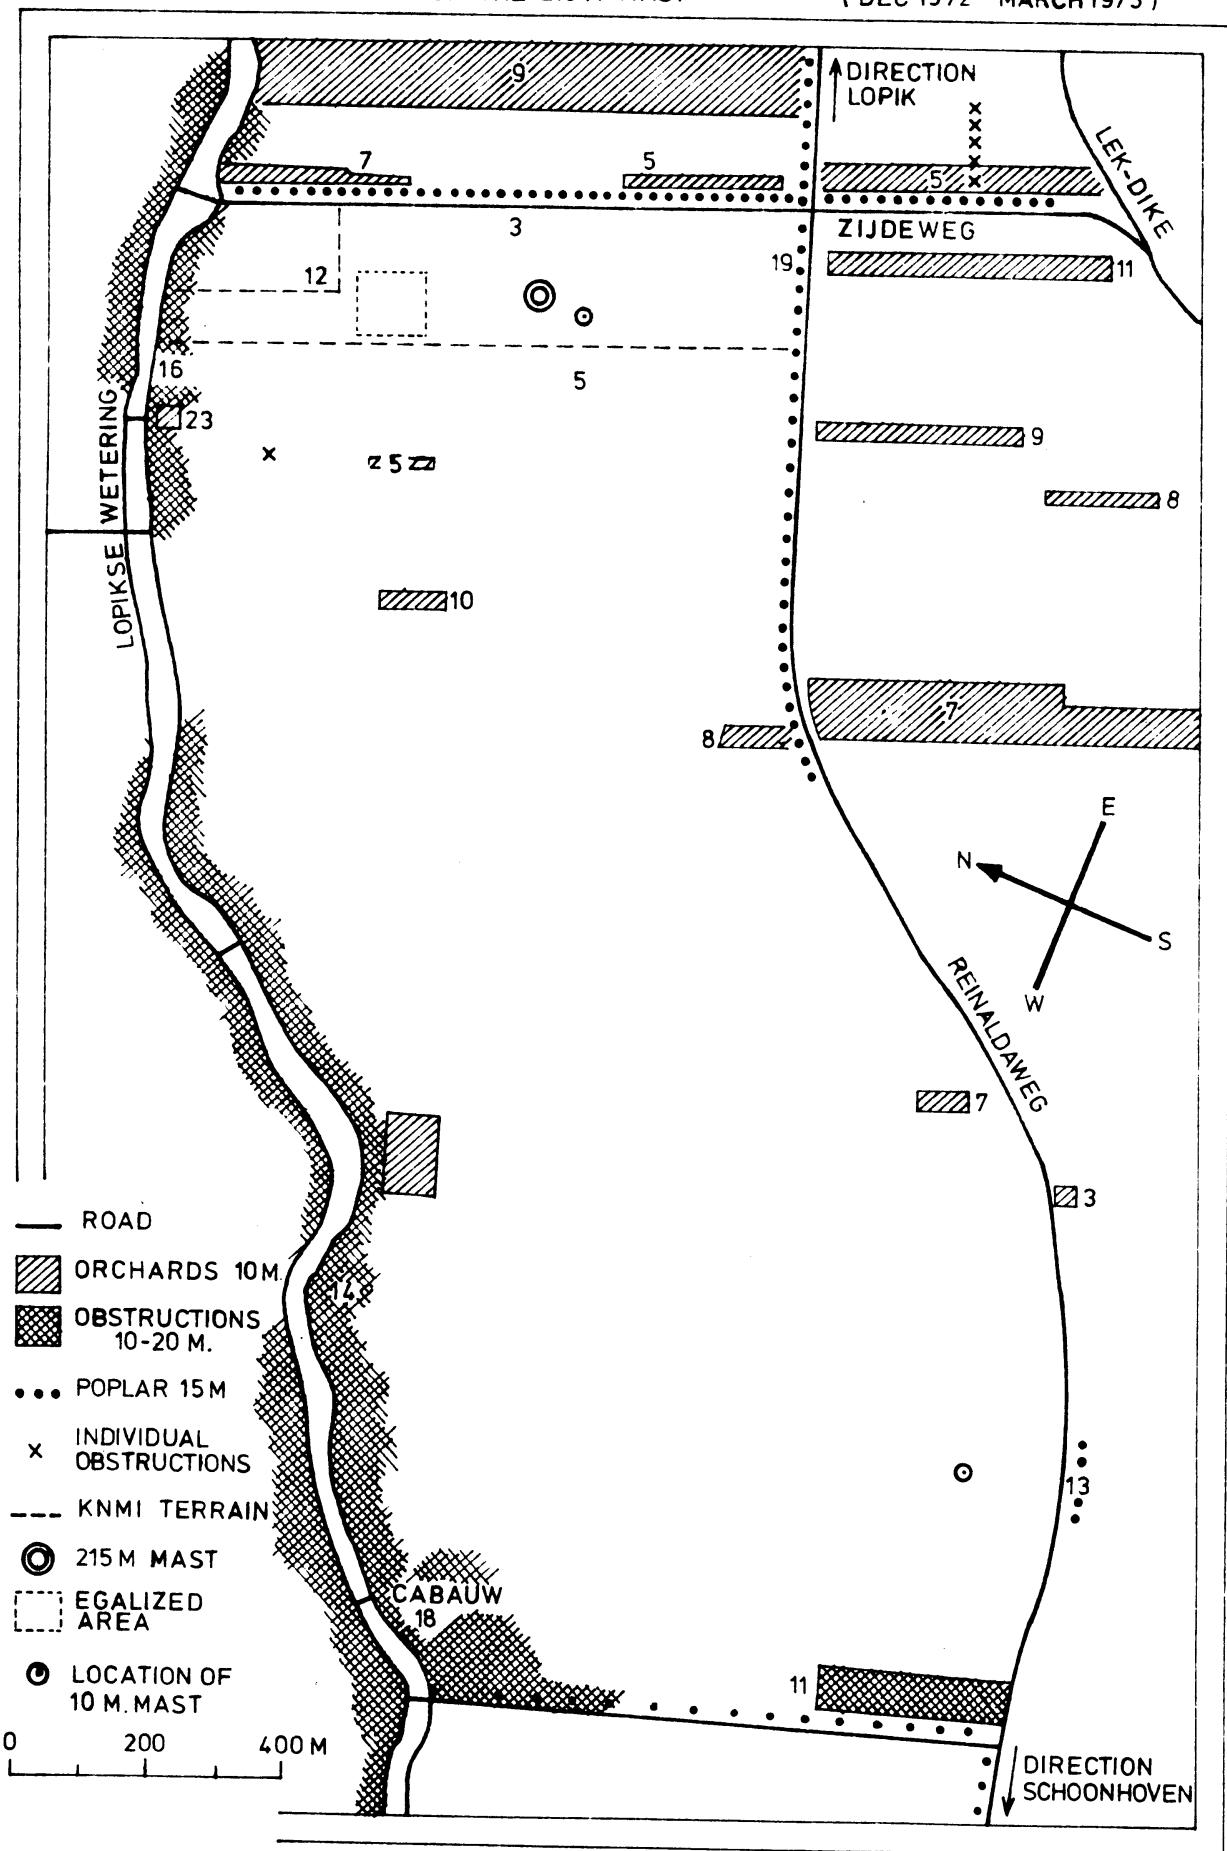


Fig. 1. Meteorological network in western Netherlands during 1973.

FIG.2 CLOSE SURROUNDS OF THE 215 M MAST

( DEC 1972 - MARCH 1975 )



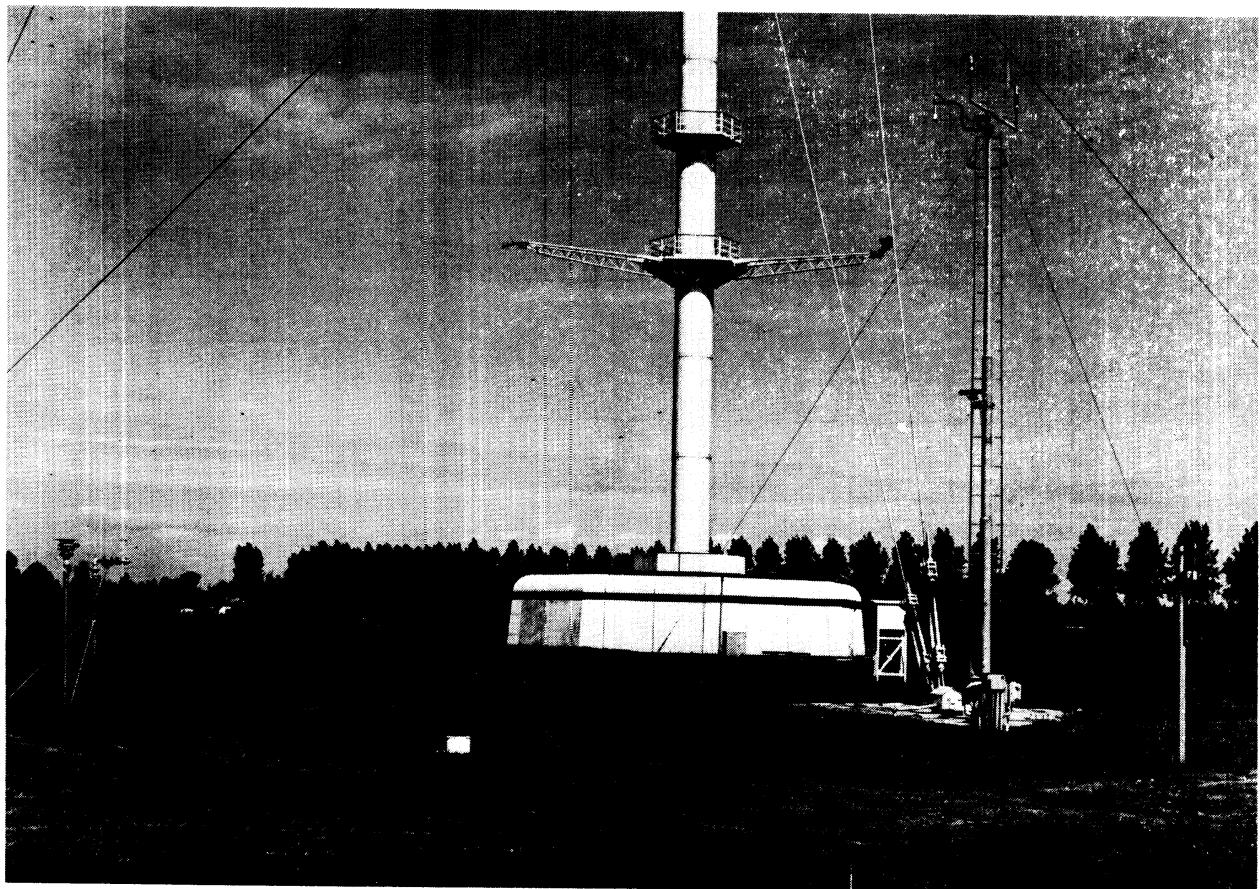


Fig. 3. View from South side towards auxiliary 10 m mast on guy anchor block, lower part of 215m-mast with registration building, and Zijdeweg poplars.



Fig. 4. View from 80 m mast level towards SW (direction Schoonhoven).

MAST CONSTRUCTION.

The mast has an expected lifetime of some decennia, and should in that period be able to accommodate steady increases in accuracy and sophistication of instrumentation. Particularly during the first years, it was improbable that much funds and effort could be made available for the provision of better instrumentation and registration facilities than those traditionally available. Therefore, the main design purpose was the provision of instrument platforms with the least possible obstruction to the airflow, with adequate signal transport facilities from the platforms towards a central registration area.

In fig. 5 the general features of the mast construction are shown. Booms are provided at 20-m intervals between 20 m and 200 m in three directions, N, SE and SW. The mast cylinder itself has a diameter of 2.0 m, and each boom extends 9.4 m beyond the cylinder surface, i.e. the instruments are located at a radial distance of  $> 5$  mast diameters. According to various sources (Borovenko et al. 1963, Gill et al. 1967) this should restrict the direct interference by the mast cylinder to  $\lesssim 1\%$  at the upwind side.

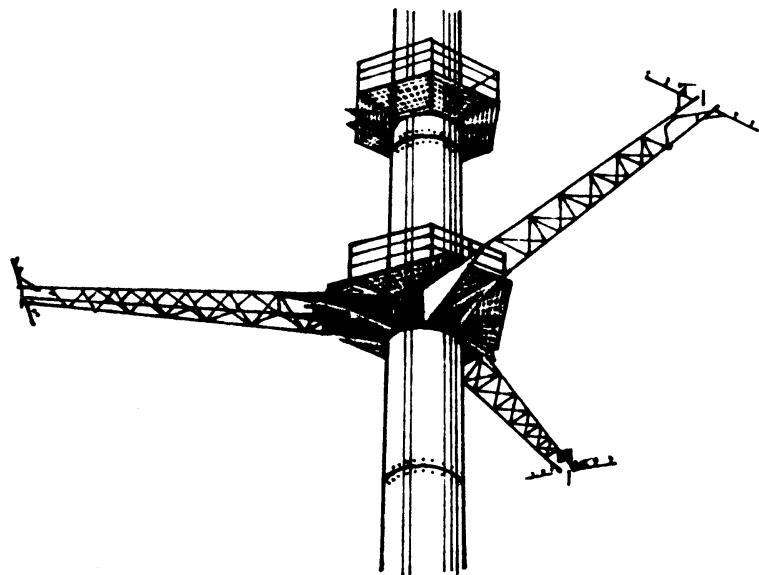


Fig. 5. Construction of a single Cabauw mast level.

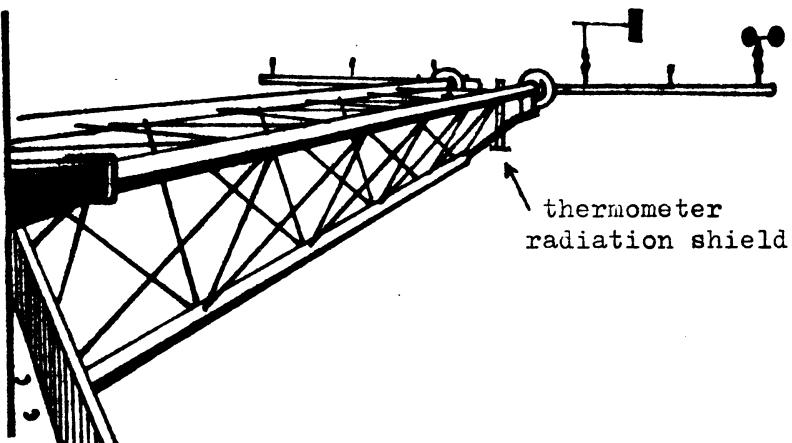


Fig. 6. Single Cabauw mast boom, with instruments.

Each boom can be swiveled upward hydraulically, so that the instruments can be serviced or exchanged from a separate balcony 8 m higher up. A small elevator running inside the mast stops at each servicing balcony. The swiveling boom construction has several advantages in comparison with the customarily observed horizontally sliding boom: the signal cables are not subject to wear because they are always in the same position, and the instrument positions are reproducible within  $0.1^\circ$  between calibrations. The Cabauw booms each consist of three tubular beams (fig. 6). The upper two tubes each carry 60 signal cables, while the third (lower) tube is used as a ventilation duct, connecting the thermometers at the boom end with the ventilator.

At the end of each boom, small tubular sideways extensions each carry 4 standardized 9-point plugs for the direct mounting of instruments. The remaining  $2 \times 20$  signal connections are available in two weathertight connection boxes. Even though the sizes of beams, connection boxes and other construction elements were minimized, the wind instruments still suffered a non-negligible interference from the boom construction in 1973, because then they were mounted as shown in fig. 6 (i.e. not high enough above the boom itself - see Borovenko et al., 1963). This interference was estimated to amount up to 5% of the wind speed, depending on azimuth; the estimate is based on data from an experimental investigation which is not yet completed.

Above the 200 m boom level, a top balcony is constructed with instrument mounting possibilities on its railing at 215 m. Lightning rods have been mounted upwards (to 226 m) and sideways in three directions above the booms. In addition, extensive lightning protection measures have been taken in the signal transport system, and until now these have been effective in preventing, e.g. lightning damage of the signal cables.

The mast as a whole is guyed at four levels in three directions (fig. 7), in order to provide the necessary stiffness. From an investigation on a similar construction (van Koten 1968) it has been derived, that the Cabauw construction has a worst-case motion of < 1% of the windspeed, with basic oscillation modes of 0.46 and 0.58 Hz.

At the foot of the mast stands an octagonal building with an extreme radius of 9 m and a height above ground of 4 m; the corners have been rounded off with a 1 m radius. Preliminary field investigations have shown that its measurable influence on the airflow at 2 m height does not extend beyond 20 m upwind. The building contains the recording instrumentation, a workshop, storage space and living quarters.

#### MEASUREMENT PROGRAM IN 1973.

In order to have experimental results from the Cabauw mast at the earliest possible time, a limited observation program was run in 1973 (BAMS 1973). For that purpose a 27-channel signal conditioning and multiplexing unit was built in-house at the KNMI (van Gorp 1976), since at the time the specifications could not be met commercially at a reasonable price. Of each registration channel 2-minute analog averages were obtained by filtering with  $RC=40$  sec., and these were recorded on paper tape with five Facit 4070 punches, used in rotation. The whole unit worked extremely reliably, giving only 2% loss of data over the whole year 1973.

For each wind measurement level on the mast, continuous measurements in three directions were necessary, requiring 6 channels in all. On the other hand, several months investigation of horizontal temperature differences between the three booms at a given level did prove, that at this distance from the mast the temperature difference between the mast wake and the free stream was  $\leq 0.15$  °C in the worst case (Slob 1976). Thus on the mast measurement of temperatures at the SE-side only was deemed sufficient. The following wind and temperature program was therefore chosen:

- |  |              |
|--|--------------|
| - wind at 10 m, 80 m and 200 m   | 16 channels; |
| - temperature at 2 m, 9 m, 20 m, 40 m, 80 m,<br>120 m, 160 m and 200 m (for details and<br>checks see below) | 10 channels. |

These were recorded every 2 minutes, together with one control channel (standard voltage), time indication and channel identification. Half-hour averages derived from these original tape registrations are given in this report. Additionally, the following data were recorded continuously during 1973:

<u>Element</u>	<u>Instrument</u>	<u>Measurement levels (m)</u>	<u>Recorder</u>	<u>Sampling or averaging period</u>
Humidity	Fuess hygrograph	2, 38, 208	drum	(3-hourly)
Visibility	11m-baseline transmissometer	1, 5, 20, 40, 60 100, 140, 180.	Honeywell multipoint	84 sec
Global radiation	Kipp (Moll-Gorczyński)	2, 215	printing counter	10 min
Radiation balance	Suomi net radiometer	2	printing counter	10 min
Rainfall	0.02 m <sup>2</sup> gauge	0.4	Honeywell multipoint	84 sec
SO <sub>2</sub>	Philips	3, 108, 208	remote	60 min

Averages of these data over the period in the right-hand column have been extracted insofar possible. After screening, they will be published if of sufficient quality, together with preliminary analyses and additional information on the instrumentation; the basic analysis of the humidity data has already been completed (Wessels 1976).

Apart from the punched-tape recording, the wind and temperature data have also been recorded on strip charts, in part for purposes of instrument control. Additionally, the Kipp BD8 recorder charts of wind speed were used for the extraction of wind speed maxima over 10-minute periods.

#### TEMPERATURE AND WIND INSTRUMENTATION.

Preliminary research on radiation errors in ventilated thermometry (Slob 1973) had shown that, if wind speeds are much higher than the ventilation speed, heat may be transferred between the outer radiation shield and the temperature sensor through internal circulation among the two concentric shields. Since windtunnel experiments proved that the resulting errors could easily surpass 0.3 °C, the existing shield was modified by the addition of a heat-insulating outer cover. Moreover the rather high ventilation speed of 9 m/s was adopted.

Further research on the possibility of wet-bulb effects on temperature measurements (Slob 1976) showed that errors of this type could easily attain several degrees in the case that sensors have been wet and are drying up during a couple of hours. These errors occur in particular after fog, drizzle, showers and the passage of low clouds at high mast levels, but also to some extent after a period with high relative humidity (> 90%). Lesser errors occurred during a period of high humidity or fog, if the sensors were more or less equally wet at all levels and the wet-bulb temperature depression would not be large anyway: in such cases errors were generally < 0.5°.

The temperature profiles were primarily measured as differences ΔT between successive levels at the SE side, using thermocouples.

In addition, absolute temperatures T were measured at 200, 80 and 20 m, using a "melting ice" unit with an estimated accuracy of  $0.05^\circ$ . In evaluating thermocouple output it was found that a linear calibration factor would give systematic deviations up to  $0.6^\circ$  at various points of the working range, so a parabolic calibration formula was used, reducing the calibration error to  $< 0.05^\circ$  over the full working range ( $+35^\circ$  to  $-35^\circ$ ). The independence of the systems for measurement of absolute and relative temperatures was applied for control purposes through comparison of the arithmetic sum of differences  $\delta T$  with the difference of two absolute temperatures. These "control temperatures" (see tables) were in general  $\leq 0.05^\circ$  in dry weather, testifying to the accuracy of the signal transport and processing system.

Wind speed and direction were measured with the same cup anemometer and wind vane as used before at Vlaardingen (Rijkkoort et al. 1970). Only at 10 m a different wind vane was used, type KNMI-VII (Wieringa 1967). The total accuracy of the wind direction measurements was found to be  $\pm 4^\circ$ , among others due to the influence of the booms and to the difficulty of determining the position of an instrument plug at 8 m distance. The accuracy of the wind speed hinges on three factors. First, the calibration, servicing and signal conditioning together provide a random error  $< 2\%$ . Second, as mentioned above, interference of the boom with the wind implies a random uncertainty of  $\sim 5\%$ , to be investigated further. Third, at all levels an overspeeding error is likely (Wieringa 1972). Therefore the absolute accuracy of the wind measurements is probably of the order of  $\sim 10\%$ , while the relative accuracy in comparison of different heights is estimated at  $\sim 5\%$ . The accuracy of gust factors at 10 m (free anemometer position) should be  $\sim 2\%$ , while those measured at 80 and 200 m might be in error by 5% or more due to boom effects. The wind speed values  $< 1.2$  m/s are untrustworthy, because the acceptability limit for anemometer starting speeds in the windtunnel was maintained at 0.6 m/s.

#### DATA CONTROL AND CORRECTION.

The chosen registration system, using paper tape punchers with a rather limited capacity of 76 hours registration, made large intervals between inspection visits impossible. At each visit at least a routine check of the analog records was carried out. Every week the paper tape records were processed by computer and submitted immediately to a routine series of checks, both on digital performance and on the content of the recorded data. As a result it was highly improbable that major measurement errors would remain unnoticed for much longer than a week. If an instrument was known to be defective, or if the boom carrying it was swiveled up for other purposes, the registration of the corresponding channel was prevented temporarily through use of a channel-by-channel switchboard (van Gorp 1976). This recording feature served its purpose well of barring from the punched-tape record those entries of which the incorrectness was known in advance.

After the completion of the record for 1973, the original 2-min data were screened and corrected for additional calibration and mea-

surement errors; there seems to be little point in listing here all the various sources of error which had to be dealt with. Data which were beyond correction, like 64 hours with glazed frost or rime obstructing the sensors, were eliminated entirely from the record. Moreover data columns were marked with an asterisk (\*), if some of the data in that column were doubtful according to pre-set criteria (maybe for instance because of wet-bulb effects), while elimination was not justified for lack of proof of measurement error.

For temperature these criteria, as given in Table B, are based on the maximal gradients observed at the mast in dry weather with an extremely positive or negative radiation balance. The day-night transition was taken at the average time of sign change in the radiation balance; generally this occurs at a sun elevation of  $100^\circ \pm 10^\circ$ , about 1.1 hr to 1.8 hr away from sunset or sunrise. An objective method of weeding out the wet-bulb-error in particular would have been preferable, but for this purpose the routine humidity instrumentation at the mast was not sophisticated enough during 1973. However, next to this extensive investigations on the wet-bulb error were conducted at 3 m and 215 m (Slob 1976), and a comparison showed that the simple gradient criteria of Table B were effective enough for discovering erroneous temperature profiles.

For wind at 80 and 200 m a boom selection procedure was developed, picking out the two wind vanes which differed least in azimuth and selecting the boom which agreed best in direction with their average azimuth (with provisos for various freak situations). Finally, for all half-hour periods which were two-thirds complete (at least ten 2-min-values available and reliable), averages were calculated. These are given in the tables which form the remainder of this report.

#### ACKNOWLEDGEMENTS.

The plan of building a 200 m meteorological mast was conceived by the late Director in Chief of the Royal Netherlands Meteorological Institute, Prof. Dr. W. Bleeker, and completed by his successor, Dr. M.W.F. Schregardus, with advice of Prof. Dr. F.H. Schmidt. The actual construction of the mast was handled by the Rijksgebouwendienst, in particular by Mr. A. Auer and Mr. F.J. Kok, and by their contractor, the construction firm De Vries Robb . At various stages of the planning of construction and instrumentation, essential contributions were provided by Mr. T.S. Andringa, Mr. E.P.F.H. Blokhuis, Mr. J.J.M. van Gorp, Dr. P.J. Rijkort, Mr. S. Schoen, Mr. W.H. Slob, Mr. F.J.B. Smulders, Mr. H.R.A. Wessels, Mr. C.M. Wierda and the third author. During 1973 the supervision of the observations was the responsibility of Mr. J.P.H. van Ameyde, Mr. H.E. Carolus, Mr. W. Hovius, Mr. P.A.T. Nieuwendijk, Mr. T.B. Ridder, Mr. P. Zeldenrust and the first two authors. Many others made valuable contributions, particularly also during the data screening activities, and though it is hardly possible to name them all, their cooperation is gratefully remembered.

REFERENCES:

- BAMS (1973): "Meteorological mast in the Netherlands". Bull. Am. Met. Soc. 54. 489-490.
- Borovenko E.V., Volkovitskii O.A., Zolotarev L.M., Isaeva S.A. (1963): "Estimation of the effect of the 300-m meteorological mast structure on the wind-gauge readings". pp. 83-92 in Investigation of the bottom 300 m-layer of the atmosphere (ed. N.L. Byzova), Izd. Ak. Nauk SSSR; transl. Isr. Progr. Sc. Tr., Jerusalem 1965.
- Gill G.C., Olsson L.E., Sela J., Suda M. (1967): "Accuracy of wind measurements on towers or stacks." Bull. Am. Met. Soc. 48, 665-674.
- Raaff W.R. (1975): "Windmetingen aan de 80 m-mast te Vlaardingen in 1967/68." KNMI-W.R.75-11.
- Rijkooert P.J., Schmidt F.H., Velds C.A., Wieringa J. (1970): "A meteorological 80-m tower near Rotterdam." Boundary-Layer Met. 1, 5-17.
- Slob W.H. (1973): "Temperature error of a ventilated thermometer in dependence of radiation and wind." WMO-CIMO-6 Sc. Disc., 47-50.
- Slob W.H. (1976): "Temperature errors of an aspiration thermometer". To be submitted to J. Appl. Met.
- Van Gorp J.J.M. (1976): "Een numerieke data opslag automaat." KNMI-W.R. 76-2.
- Van Koten H. (1968): "Metting van bewegingssnelheden aan de TV-mast te Wieringerwerf." Inst. TNO Bouwmat. Bouw-Constr. Rapp.B-68-294.
- Wessels H.R.A. (1976): "Vochtigheidsmetingen op 200 m hoogte toegepast op het schatten van de lengte van koeltorenpluimen". KNMI-W.R. 76-8.
- Wieringa J. (1967): "Evaluation and design of wind vanes". J. Appl. Met. 6, 1114-1122.
- Wieringa J. (1972): "Tilt errors and precipitation effects in trivane measurements of turbulent fluxes over water". Boundary-Layer Met. 2, 406-426.
- Wieringa J. (1976): "An objective exposure correction method for average wind speeds measured at a sheltered location". Quart. J. Roy. Met. Soc. 102, 241-253.

TABLE A: Roughness lengths as derived from gustiness measurements at 10 m height on the auxiliary mast at Cabauw in 1973.

<u>Wind direction</u>	<u>sector</u>	<u><math>z_0</math> (m)</u>	<u>summer</u>	<u>winter</u>
350 - 010 (N)		0.21	0.20	
020 - 040		0.25	0.18	
050 - 070		0.33	0.21	
080 - 100 (E)		0.35	0.15	
110 - 130		0.27	0.15	
140 - 160		0.19	0.10	
170 - 190 (S)		0.19	0.10	
200 - 220		0.17	0.10	
230 - 250		0.07	0.06	
260 - 280 (W)		0.08	0.10	
290 - 310		0.12	0.11	
320 - 340		0.11	0.09	

Summer = May - October, winter = November - April.

Seen from the auxiliary mast, the main 215 m mast stands in the North sector, but in the above table no significant roughness increase is found for the 350-010 sector. One may perhaps conclude from this that the main mast wake effects are less than the influence of the poplar row along the Zijdeweg (see fig. 3), at least for 30° azimuth sectors. The relative accuracy of the roughness length values is estimated at  $\pm 20\%$ , with a possibility of a systematic uncertainty factor of 2 or less.

TABLE B: Temperature gradient criteria per height interval at Cabauw. If during a given half-hour-period the gradient has exceeded these criteria on at least one level during at least two minutes, the half-hour-period column is marked with an asterisk.

<u>Height interval</u> (m)	<u>Boundary value of <math>\delta T</math> (°C)</u>		
	<u>Night</u>	<u>Summer day</u>	<u>Winter day</u>
200-160	-0.55	-0.95	-0.65
160-120	-0.55	-0.95	-0.65
120- 80	-0.55	-0.95	-0.65
80- 40	-0.55	-0.95	-0.65
40- 20	-0.35	-0.95	-0.65
20- 9	-0.25	-1.45	-0.95
9- 2	-0.25	<-1.95 or >+0.95	<-0.95 or >+0.95

Summer = 16 March - 25 September,  
Winter = 26 September - 15 March.

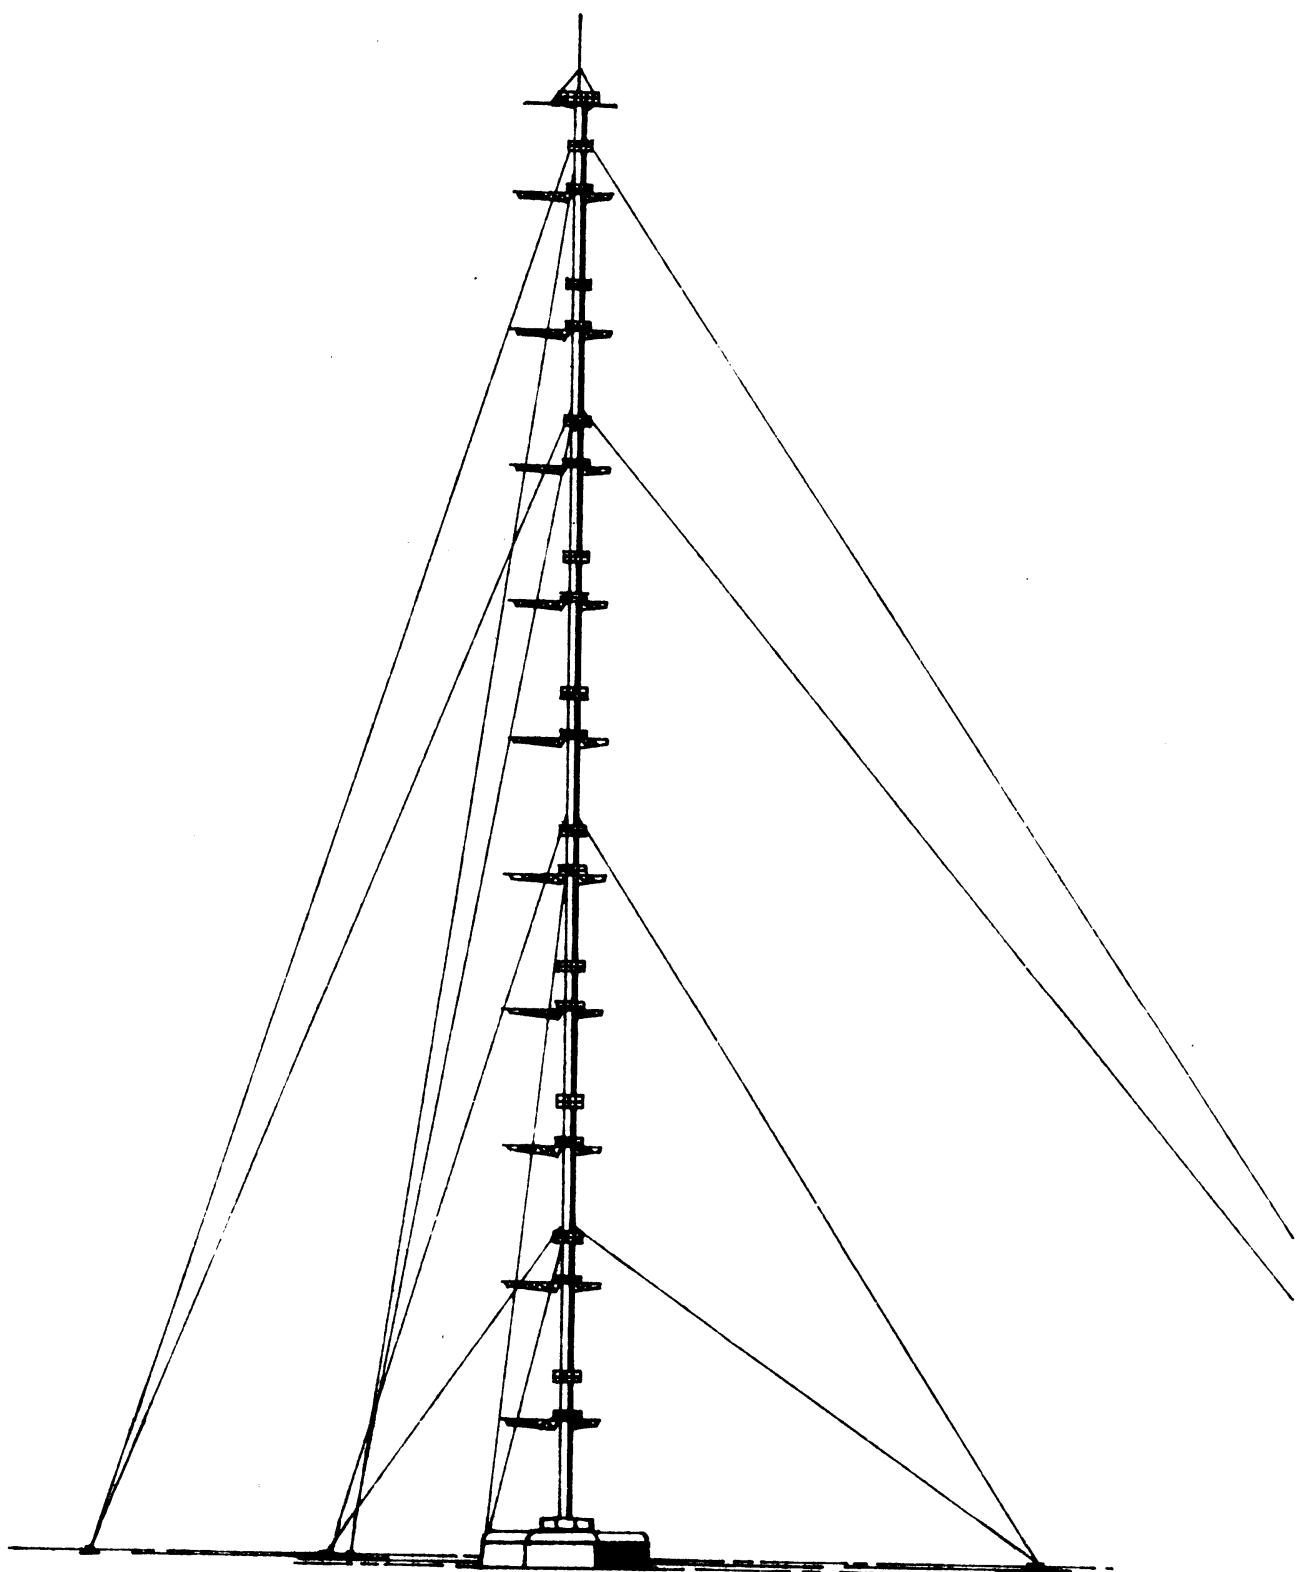


Fig. 7. General construction of Cabauw mast.

HALF-HOURLY AVERAGE PROFILES OF TEMPERATURE AND WIND IN 1973.

Times are given in Greenwich Mean Time, with two columns below, e.g., the time heading 15-16: the left-hand column containing averages over the period 15.01 - 15.30, and the right-hand column over the period 15.31 - 16.00. Above the row of time headings occasionally the date is indicated as day - month - (year - 1900), e.g. 051273 = 5 December 1973.

- In the columns the entry xxx indicates one of the following:
- (1) This type of measurement at the indicated height has not been made regularly during 1973; or:
  - (2) This measurement has not been recorded at the indicated time, a temporary interruption having been made because of servicing, control, malfunction or other technical reasons; or:
  - (3) The recorded values have been rejected at the screening stage because of some known measurement error; or:
  - (4) Of this measurement for this half-hour-period less than ten acceptable two-minute-average values were available, thus no statistically reliable half-hour-average could be formed.

Legend of tables:

D = wind direction on the selected boom, in degrees North.

F = wind speed on the selected boom, in 0.1 m/s -units.

T = temperature on the SE-boom, in 0.1 °C-units.

Z0 = measured on the SE-boom.

Figures indicate measuring height in meters. Thus, e.g. F120Z0 is the wind speed at 120 m height on the SE-boom.

Control temperatures (see page 11 for further comment), in 0.1 °C:

$$CT200 = -T_{200} + \delta T_{200-160} + \delta T_{160-120} + \delta T_{120-80} + T_{80}.$$

$$CT20 = T_{80} - \delta T_{80-40} - \delta T_{40-20} - T_{20}.$$

During a half-hour period large changes in wind direction may occur, and additionally large wind direction shears were observed regularly. The boom selection (insofar possible and necessary) was therefore made anew for each two-minute period, separately for each level, and e.g. a wind speed average of Easterly winds may therefore consist of 6 two-minute-averages from the N-boom and 9 two-minute-averages from the SE-boom at the indicated level.

The occurrence of an asterisk (\*) between the T2- and CT200-rows indicates that the criteria of Table B have been exceeded at some level for some time during the indicated half-hour. For further comment see page 12.

### specimen table

K O N I N K L I J K   N E D E R L A N D S  
M E T E O R O L O G I S C H   I N S T I T U U T

D e   B i l t

WETENSCHAPPELIJK RAPPORT  
W.R. 76-7 (Supplement)

A.P. van Ulden,  
J.G. van der Vliet en J. Wieringa

Temperature and wind observations  
at heights from 2 m to 200 m  
at Cabauw in 1973.

Waarnemingen van temperatuur en wind  
op hoogten van 2 m tot 200 m  
te Cabauw in 1973.

De Bilt, 1976

Publikationsnummer: K.N.M.I. W.R. 76-7 (Supplement)(M.O.)

HALFUUR-GEMIDDELDEN VAN WINDRICH-  
TING, WINDSNELHEID EN TEMPERATUUR

HALF-HOURLY AVERAGES OF WINDDIRECTION,  
WINDSPEED AND TEMPERATURE

GMT	010173 CABAUW											
	00-01			01-02			02-03					
D200							225	225	229	231	228	225
D 80							204	210	213	216	210	204
D 10							177	185	190	175	163	153
F200							048	053	054	056	055	058
F160Z0							xxx	xxx	xxx	xxx	xxx	xxx
F120Z0							xxx	xxx	xxx	xxx	xxx	xxx
F 80							074	070	069	064	065	066
F 40Z0							xxx	xxx	xxx	xxx	xxx	xxx
F 20Z0							022	023	021	019	028	023
F 10							xxx	xxx	xxx	xxx	xxx	xxx
F 2							xxx	xxx	xxx	xxx	xxx	xxx
T200							+025	+030	+032	+033	+034	+030
T160							+022	+028	+031	+032	+029	
T120							+021	+026	+027	+030	+030	+025
T 80							+019	+025	+027	+027	+016	+005
T 40							-008	-003	-005	-010	-015	-020
T 20							-026	-022	-022	-025	-031	-035
T 9							-031	-029	-028	-030	-036	-041
T 2							-044	-045	-045	-047	-051	-051
CT200							-000	-000	-000	-000	-000	-000
CT 20							-000	-000	-000	-000	-000	-000

U10173													010173												
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15		
22J 223	225	226	219	210	196	193	195	199	207	211	224	248	249	246	243	247	248	246	247	258	254	262	D200		
203 204	209	208	207	209	207	204	201	209	201	210	197	195	202	203	206	215	210	209	191	200	196	204	D 80		
176 193	148	151	160	171	163	145	145	153	154	142	142	157	168	172	175	182	196	156	158	162	145	133	D 10		
U60 062	059	049	048	042	043	047	049	056	056	055	054	047	042	046	040	044	043	045	044	049	048	055	F200		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F120Z0	
U72 078	068	058	057	048	051	053	062	061	063	052	051	062	053	054	053	042	036	030	023	024	022	021	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0	
U26 026	029	029	025	022	029	029	027	026	021	017	030	033	029	028	022	018	019	017	020	016	017	014	F 20Z0		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2	
+027	+028	+026	+027	+025	+024	+029	+026	+027	+027	+029	+030	+032	+034	+033	+033	+035	+034	+034	+037	+037	+037	+038	T200		
+027	+026	+027	+024	+025	+023	+025	+024	+026	+025	+027	+027	+030	+029	+036	+036	+037	+037	+037	+037	+037	+038	+038	T160		
+026	+013	+020	+022	+022	+023	+025	+024	+018	+019	+010	+009	+009	+010	+023	+026	+032	+035	+030	+037	+030	+028	+032	T120		
+013	+013	+016	+015	+019	+023	+016	+013	+003	+005	+009	+013	+019	+010	+008	+012	+027	+027	+009	+023	+016	+017	+018	+019		
+018	+018	+018	+021	+008	+007	+004	+003	+016	+024	+022	+035	+038	+037	+034	+024	+017	+007	+002	+006	+012	+014	+014	+013		
+036	+016	+018	+036	+034	+030	+027	+036	+042	+042	+048	+049	+045	+037	+029	+018	+008	+008	+002	+008	+013	+016	+017	+011		
+040	+042	+043	+041	+040	+036	+036	+042	+046	+046	+050	+050	+046	+038	+030	+018	+008	+003	+009	+014	+017	+017	+015	+011		
+052	+054	+052	+050	+050	+053	+053	+056	+056	+058	+058	+056	+047	+038	+030	+018	+007	+005	+010	+016	+017	+012	+008	T 2		
-000	-010	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT200		
-000	-010	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20		

010173													010173													020173 CABAUW		
GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15				
D200	266	255	258	251	237	234	218	208	206	198	205	208	205	202	219	227	220	227	227	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
D 80	176	197	213	201	193	197	196	195	197	183	193	194	192	180	190	198	196	207	207	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
D 10	136	146	141	138	134	135	144	151	149	151	166	160	160	151	150	143	150	161	161	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F200	052	047	043	039	032	027	028	033	036	042	038	035	030	037	041	048	048	048	048	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	024	029	028	032	034	033	036	037	035	040	044	039	039	035	037	036	045	047	047	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	017	024	028	024	020	023	028	031	030	034	033	033	034	034	033	036	036	036	036	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F200	+032	+031	+030	+028	+027	+025	+023	+023	+023	+024	+024	+024	+026	+029	+029	+029	+029	+029	+029	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F160	+034	+034	+035	+033	+033	+030	+029	+027	+026	+026	+026	+026	+027	+027	+029	+032	+033	+033	+033	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F120	+027	+032	+036	+035	+033	+032	+032	+032	+032	+032	+033	+033	+034	+034	+033	+036	+036	+036	+036	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
T 80	+028	+021	+030	+031	+030	+031	+032	+032	+032	+032	+033	+033	+034	+034	+033	+036	+036	+037	+037	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
T 40	+022	+014	+018	+017	+012	+016	+016	+020	+023	+028	+031	+030																



240173

04017

050

6424

020175

050173

050173

050173

0601

CABAUW

060173

060173

050173

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D 200	057	066	071	064	053	061	059	055	059	072	094	085
D 80	066	077	087	078	060	071	064	052	056	072	091	046
D 10	059	079	092	076	054	061	055	045	047	063	088	077
F 200	038	076	028	035	058	039	033	044	049	046	036	033
F 160Z0	YXX	XXX										
F 120Z0	XXX											
F 80	040	032	027	028	033	033	028	043	050	045	036	033
F 40Z0	XXX											
F 20Z0	XXX											
F 10	029	020	015	017	019	020	019	027	035	030	026	024
F 2	XXX											
T 200	+020	+020	+019	+018	+018	+017	+015	+013	+010	+009	+005	+003
T 160	+023	+023	+021	+020	+021	+020	+018	+015	+013	+012	+008	+006
T 120	+025	+025	+023	+023	+023	+022	+021	+019	+015	+014	+011	+008
T 80	+028	+027	+025	+025	+026	+025	+023	+020	+018	+017	+013	+010
T 40	+031	+030	+026	+027	+027	+026	+027	+025	+023	+020	+019	+016
T 20	+032	+031	+029	+029	+029	+028	+027	+027	+024	+021	+017	+014
T 9	+033	+032	+029	+029	+029	+029	+028	+027	+025	+022	+015	+014
T 2	+033	+030	+029	+029	+030	+029	+028	+025	+022	+022	+016	+015
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 20	-000	+000	-000	-000	-000	+000	+000	+000	+000	-000	-000	-000

0/0173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	070173
065	067	057	044	053	072	072	074	076	067	066	069	065
077	070	052	061	060	074	060	082	072	073	073	072	059
077	059	055	057	056	065	078	089	063	058	049	053	069
031	036	XXX	XXX	XXX	050	066	063	072	067	061	062	051
XXX												
XXX												
035	036	036	036	036	031	028	025	021	019	028	025	018
XXX												
XXX												
023	029	031	024	025	021	016	010	008	014	016	013	012
XXX												
-007	-010	-008	-007	-007	-005	-003	-000	+005	+013	+014	+013	+017
-004	-003	-008	-007	-006	-004	-003	+004	+009	+011	+009	+013	+011
-001	-025	-024	-005	-003	-002	-002	+001	+003	+005	+007	+009	+010
+001	-035	-037	-003	-001	+000	+000	+003	+004	+005	+007	+008	+010
+004	+030	+030	+000	+002	+002	+003	+005	+006	+007	+008	+010	+012
+005	+001	+001	+001	+001	+001	+001	+004	+004	+005	+007	+010	+012
+006	+002	+002	+001	+001	+004	+004	+006	+006	+007	+009	+010	+012
+006	+003	+002	+002	+004	+005	+005	+005	+007	+008	+009	+011	+013
*	*	*	*	*	*	*	*	*	*	*	*	*
-001	+001	+003	+002	+001	-000	-002	-001	+000	-000	-000	-000	-000
-000	+000	+000	+000	+001	-001	-000	-000	-000	-000	+000	+000	+001
												CT 200
												CT 20

0/0173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	070173	080173	CABA UW		
D 200	012	025	035	042	033	034	033	036	032	021	028	018	009	013	008	
D 80	742	803	029	028	034	042	038	031	032	025	028	021	009	001	360	001
D 10	338	316	270	286	345	314	355	356	010	016	014	005	352	334	341	345
F 200	040	049	050	045	042	041	048	043	046	047	042	035	038	040	040	040
F 160Z0	YXX	XXX	XXX	XXX	XXX	XXX										
F 120Z0	XXX	XXX	XXX	XXX	XXX											
F 80	022	024	026	022	027	024	031	029	035	044	043	036	037	034	036	037
F 40Z0	XXX	XXX	XXX	XXX	XXX											
F 20Z0	XXX	XXX	XXX	XXX	XXX											
F 10	023	008	016	006	002	002	008	012	014	017	020	015	016	015	013	014
F 2	XXX	XXX	XXX	XXX	XXX											
T 200	+025	+025	+024	+028	+025	+024	+029	+026	+032	+031	+032	+033	+033	+033	+033	+033
T 160	+023	+028	+026	+027	+023	+028	+032	+030	+035	+035	+036	+037	+037	+036	+037	+037
T 120	+027	+031	+030	+033	+038	+032	+031	+035	+033	+038	+040	+040	+040	+039	+038	+037
T 80	+029	+032	+033	+032	+032	+032	+032	+036	+035	+042	+042	+043	+043	+041	+041	+040
T 40	+029	+032	+033	+034	+034	+027	+026	+035	+036	+043	+044	+044	+044	+041	+041	+040
T 20	+030	+031	+033	+033	+033	+036	+037	+035	+035	+042	+043	+042	+043	+039	+040	+039
T 9	+031	+031	+032	+032	+032	+035	+035	+035	+035	+042	+043	+042	+043	+039	+040	+037
T 2	+031	+031	+030	+029	+028	+021	+021	+028	+026	+033	+034	+034	+035	+037	+037	+037
CT 200	-000	-000	-001	-001	+004	-003	-008	-003	-006	-001	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+000	+000	+002	-004	-004	+003	+000	+007	+008	+003	-000	+000	+000	+000

080173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	080173	
023	025	023	023	360	001	358	010	017	015	007	008	026	029
015	032	347	348	314	318	332	347	003	003	001	012	023	025
513	153	287	277	296	308	314	314	313	319	324	349	004	005
XXX	XXX	XXX	XXX										
XXX	XXX	XXX	XXX										
022	029	017	013	031	037	040	046	042	046	050	051	053	
XXX	XXX	XXX	XXX										
XXX	XXX	XXX	XXX										
007	005	015	010	020	016	019	018	021	020	016	014	015	
XXX	XXX	XXX	XXX										
*030	+030	+040	+040	+039	+039	+040	+043	+044	+044	+042	+043	+043	
+033	+033	+037	+037	+039	+041	+042	+043	+046	+047	+044	+044	+042	
+039	+044	+042	+042	+040	+041	+043	+046	+048	+049	+047	+044	+045	
+039	+043	+040	+042	+039	+041	+044	+046	+049	+047	+044	+045	+046	
+040	+042	+040	+040	+038	+039	+041	+044	+049	+047	+044	+047	+045	
+038	+039	+036	+037	+035	+036	+036	+037	+037	+036	+036	+036	+036	
+036	+036	+035	+034	+034	+035	+034	+035	+036	+036</td				



7

-00173

110175

110173

120173

120173

120173

130173

CABA UW

04-07	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 000	131	139	137	134	137	136	135	131	139	144	153	137	147	137	120	130	146	151	160	171	182	179	172	175
D 80	132	139	137	137	138	136	137	129	135	130	130	126	122	128	116	109	117	123	124	124	124	120	121	123
D 10	129	134	133	136	137	134	135	128	128	120	107	105	093	102	091	074	091	100	101	101	098	090	093	101
F 200	062	063	068	069	067	065	060	056	057	048	032	034	042	041	044	059	058	057	063	058	050	044	048	055
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	049	047	051	055	055	045	039	045	046	039	035	038	036	035	048	055	059	056	054	046	054	062	060	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	032	031	034	036	036	026	024	024	022	023	020	021	018	018	017	018	019	023	022	019	017	023	026	028
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
T 200	-000	-001	-002	-003	-003	-004	-003	-002	-004	-006	-005	-004	-001	-003	-006	-009	-011	-015	-011	-007	-005	-004	-004	-004
T 160	+003	+003	+002	+001	+000	+000	+001	+001	+002	+002	+001	+003	+001	+002	+007	+008	+013	+015	+017	+019	+018	+009	+012	
T 120	+007	+007	+005	+005	+004	+003	+004	+005	+003	+001	+002	+002	+005	+005	+001	+005	+007	+010	+014	+017	+019	+021	+021	+022
T 80	+011	+010	+009	+008	+007	+007	+007	+003	+006	+003	+004	+005	+006	+007	+005	+002	+005	+008	+012	+015	+018	+021	+022	+026
T 40	+014	+014	+012	+011	+011	+010	+010	+013	+009	+005	+002	+001	+001	+005	+001	+006	+009	+013	+016	+019	+022	+024	+027	
T 20	+016	+015	+014	+013	+012	+012	+012	+010	+007	+007	+000	+000	+001	+004	+007	+010	+014	+017	+020	+023	+025	+026	+027	
T 9	+017	+016	+014	+013	+012	+012	+013	+010	+007	+007	+003	+003	+001	+002	+004	+007	+010	+012	+015	+018	+021	+024	+026	
T 2	+016	+015	+014	+013	+012	+011	+011	+012	+009	+005	+002	+000	+002	+000	+008	+012	+014	+016	+020	+023	+025	+028	+031	
C 200	-001	-001	-000	-001	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
C 1 21	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	

130173

130173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
175	1/5	171	168	166	162	156	157	157	150	144	137	141	141	129	120	113	100	105	109	106	108	108	D 200	
122	1/4	133	134	127	135	132	130	132	122	120	109	105	108	111	106	104	105	102	107	103	099	099	096	D 80
106	1/8	113	112	109	110	102	103	096	080	098	089	098	105	099	098	098	095	096	095	096	095	096	095	D 10
066	062	055	053	049	047	052	057	079	081	091	093	091	095	092	084	080	075	073	077	081	080	080	080	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0											
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0											
063	065	067	072	071	069	069	058	053	066	069	068	064	056	051	056	062	058	057	060	059	061	061	061	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
050	029	027	029	029	028	026	018	018	025	025	031	037	041	038	035	045	046	047	040	042	036	036	036	F 10
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2											
-006	-014	-002	-000	-004	-004	-003	-034	-007	-014	-012	-016	-018	-010	-016	-019	-018	-015	-013	-009	-008	-005	-005	-003	T 200
-016	-016	-006	-006	-008	-012	-009	-011	-022	-021	-020	-019	-016	-014	-018	-015	-011	-011	-010	-009	-009	-006	-005	-003	T 160
-025	-026	-023	-020	-027	-020	-021	-022	-021	-024	-022	-022	-021	-017	-018	-015	-011	-007	-007	-005	-002	-002	-001	-001	T 120
-028	-030	-029	-029	-021	-027	-028	-027	-029	-025	-027	-027	-024	-021	-017	-013	-008	-004	-004	-002	+001	+001	+002	+002	T 40
-029	-031	-032	-034	-034	-033	-034	-034	-035	-034	-035	-034	-032	-027	-022	-018	-013	-009	-004	-000	+002	+005	+005	+005	T 20
-030	-032	-033	-035	-035	-036	-036	-037	-037	-037	-032	-027	-021	-016	-011	-007	-002	+002	+003	+004	+006	+006	+006	+006	T 9
-031	-035	-033	-034	-035	-036	-037	-037	-038	-039	-038	-033	-026	-020	-015	-010	-005	-000	+003	+004	+006	+006	+007	+007	T 2
-033	-035	-036	-037	-038	-040	-040	-041	-043	-042	-034	-027	-020	-014	-009	-004	-004	+005	+006	+008	+007	+007	+006	+006	T 2
-000	-010	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
-000	-010	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

130173

130173

04-07	05-08	06-09	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15															
189	192	190	190	194	196	201	205	202	198	199	197	198	197	197	199	197	197	197	196	202	194	195	191	192	D 200
104	170	163	159	161	158	170	180	174	169	175	181	182	179	182	185	183	184	185	192	183	179	180	180	D 80	
148	152	144	144	140	140	153	158	150	147	155	160	169	168	175	172	174	175	178	169	170	168	167	D 10		
120	119	116	113	117	115	135	145	130	123	119	119	113	111	107	094	092	088	078	074	088	097	097	097	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0											
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0											
089	098	086	082	078	086	081	084	084	086	085	077	076	075	074	064	066	058	054	060	066	074	074	076	F 80	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
041	041	044	044	044																					

140173

GMT	10-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW
DZ00	195 195	194 194	190 185	183 184	185 184	185 179	171 158	161 160	159 157	158 159	159 159	162 161	155 155
D 80	167 174	174 174	166 166	163 162	160 157	154 149	147 138	135 137	137 133	137 137	136 136	138 143	139 139
D 10	165 157	157 156	145 143	133 137	133 133	139 140	131 130	127 127	124 126	127 126	128 129	131 131	137 137
FZ00	076 097	099 110	115 112	111 119	119 124	118 108	102 104	108 113	113 113	123 133	132 138	136 136	139 141
F15020	xxx xxx												
F 80	074 073	073 076	072 070	068 079	080 079	079 068	071 071	077 077	080 083	085 085	092 093	090 093	096
F 4020	xxx xxx												
F 10	036 036	033 040	039 033	032 032	032 035	040 037	037 034	041 042	045 048	049 053	056 056	052 054	056
F 2	xxx xxx												
TZ00	+047 +052	+053 +053	+053 +054	+049 +049	+055 +056	+067 +065	+055 +040	+038 +035	+035 +035	+036 +036	+043 +043	+043 +043	+047 +047
T160	+052 +054	+053 +050	+050 +050	+049 +048	+051 +052	+056 +056	+051 +041	+040 +040	+037 +035	+035 +035	+043 +043	+046 +046	+045 +045
T 120	+053 +054	+053 +053	+050 +051	+050 +048	+049 +050	+051 +049	+048 +048	+042 +042	+039 +039	+036 +036	+039 +039	+042 +042	+041 +042
T 80	+054 +054	+053 +051	+051 +050	+048 +048	+048 +048	+048 +047	+046 +046	+042 +042	+039 +038	+037 +036	+042 +042	+040 +040	+042 +045
T 40	+054 +052	+052 +050	+050 +048	+046 +046	+045 +045	+048 +046	+045 +045	+044 +044	+039 +038	+037 +036	+045 +045	+044 +044	+043 +046
T 20	+054 +052	+052 +049	+049 +047	+045 +045	+045 +045	+048 +048	+046 +045	+042 +042	+038 +038	+037 +037	+040 +040	+043 +042	+040 +040
T 4	+053 +051	+049 +048	+047 +047	+044 +044	+044 +044	+047 +045	+045 +045	+043 +043	+040 +039	+038 +038	+042 +042	+040 +040	+039 +040
T 2	+051 +048	+046 +046	+047 +045	+042 +042	+043 +043	+046 +046	+044 +044	+045 +045	+043 +041	+040 +040	+042 +042	+040 +040	+039 +040
CT200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	*
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-001 -001	-001 -001	+001 +003
													+005 +005
													+000 +000

150173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	150173
154 154	151 157	161 165	164 169	172 177	181 183	188 188	195 197	200 200	203 204	xxx 204	199 197	D 200
157 158	153 140	146 150	147 156	161 168	176 179	183 184	191 195	196 198	200 200	xxx 200	196 193	D 80
152 159	126 134	141 144	137 147	151 160	169 173	175 176	185 192	198 200	203 203	xxx 202	198 195	D 10
150 155	153 157	148 145	148 153	155 157	159 170	174 163	155 158	150 155	149 149	xxx 128	129 141	F 200
xxx xxx	F160Z0											
152 156	103 111	100 101	104 106	113 113	122 136	136 130	117 120	124 122	127 123	xxx 104	102 107	F 80
xxx xxx	F 40Z0											
xxx xxx	F 20Z0											
xxx xxx	F 10											
+049 +046	+047 +048	+048 +046	+050 +050	+052 +054	+057 +059	+056 +056	+057 +058	+052 +056	+060 +061	+064 +064	+066 +068	+067 +067
+047 +047	+046 +046	+045 +045	+050 +050	+052 +052	+054 +055	+058 +061	+059 +059	+058 +060	+067 +067	+071 +071	+070 +070	+076 +076
+045 +047	+045 +047	+046 +046	+051 +053	+055 +056	+060 +062	+062 +059	+056 +066	+069 +069	+070 +070	+073 +073	+074 +074	+073 +073
+046 +048	+047 +047	+047 +047	+049 +051	+053 +057	+061 +061	+064 +064	+058 +058	+068 +068	+071 +073	+075 +075	+076 +076	+072 +072
+047 +049	+048 +048	+048 +048	+052 +052	+054 +057	+062 +064	+062 +054	+061 +061	+072 +072	+074 +074	+077 +077	+080 +080	+086 +086
+041 +044	+043 +043	+045 +045	+046 +046	+048 +048	+050 +050	+052 +052	+054 +054	+056 +056	+072 +072	+074 +074	+080 +080	+087 +085
+043 +045	+047 +047	+047 +047	+050 +050	+053 +056	+060 +063	+062 +054	+054 +054	+067 +067	+073 +073	+076 +076	+080 +080	+087 +085
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	C 200
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 20

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	150173	
DZ00	195 196	196 196	194 192	183 186	186 180	179 180	184 182	189 189	208 218	216 216	205 205	195 203	205 208
D 80	196 196	190 184	184 178	167 168	163 152	155 151	159 164	200 219	207 207	196 195	193 195	195 197	200 200
D 10	190 186	175 167	167 156	156 149	145 140	142 140	148 147	184 187	213 223	206 206	193 187	183 187	188 192
FZ00	153 128	124 117	118 129	135 133	132 148	137 103	096 084	078 071	072 072	096 107	106 106	100 101	104 097
F160Z0	xxx xxx												
F 80	099 088	103 106	105 105	101 102	093 094	094 098	094 085	077 062	059 064	063 065	069 075	071 072	080 075
F 40Z0	xxx xxx												
F 10	061 044	043 046	044 044	043 050	040 046	048 050	050 046	045 045	036 036	040 040	049 049	041 044	046
F 2	xxx xxx												
TZ00	+073 +072	+074 +074	+073 +069	+071 +067	+067 +067	+052 +055	+043 +043	+042 +036	+032 +032	+033 +033	+030 +030	+028 +028	+025 +023
T160	+075 +074	+074 +077	+077 +076	+071 +070	+066 +065	+057 +054	+054 +054	+045 +045	+044 +041	+036 +031	+032 +032	+034 +034	+031 +029
T 120	+078 +076	+080 +080	+077 +071	+069 +063	+054 +054	+049 +051	+046 +046	+044 +044	+039 +035	+034 +034	+036 +036	+035 +035	+030 +028
T 80	+081 +077	+080 +081	+076 +076	+070 +067	+061 +061	+051 +051	+047 +048	+046 +046	+047 +047	+042 +042	+038 +037	+037 +037	+038 +030
T 40	+082 +073	+073 +073	+071 +064	+064 +060	+058 +058	+053 +047	+044 +044	+045 +045	+046 +046	+042 +042	+039 +039	+041 +040	+039 +033
T 20	+061 +074	+069 +066	+066 +056	+054 +054	+055 +055	+051 +051	+044 +043	+045 +045	+046 +046	+042 +042	+039 +039	+042 +042	+037 +033
T 4	+080 +072	+066 +063	+063 +053	+053 +050	+043 +042	+042 +042	+044 +046	+048 +048	+047 +047	+040 +040	+042 +042	+041 +037	+034 +034
T 2	+076 +065	+060 +055	+055 +044	+051 +047	+047 +047	+040 +047	+045 +045	+047 +047	+042 +042	+043 +043	+040 +040	+041 +041	+033 +033
CT200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	160173
219 222	227 225	228 229	251 230	235 237	244 251	245 247	xxx xxx	D 200				
201 235	209 208	209 208	211 210	217 221	215 212	222 224	xxx xxx	D 80				
201 206	210 207	206 205	204 199	208 214	207 201</td							

160173

160173

170173

CABA UW

	1-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03											
D 200	xxx 193	184	196	209	176	196	186	184	196	196	197	196	194	174	162	161	160	140	127	120	104	095	098
D 80	xxx 198	167	200	209	206	195	193	203	197	191	160	145	145	148	138	144	132	128	132	111	103	114	
D 10	xxx 200	181	203	212	199	188	189	214	214	196	141	089	076	096	088	101	113	090	094	083	061	053	061
F 200	xxx 032	026	039	059	064	067	064	053	052	041	049	038	022	019	017	023	025	026	034	033	038	046	
F 140Z0	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 120Z0	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 50	xxx 028	018	029	039	055	049	053	049	047	029	030	022	023	026	022	024	027	030	034	034	036	045	041
F 40Z0	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 20Z0	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	xxx 020	000	018	023	027	021	018	017	025	007	014	013	016	014	012	015	013	018	019	019	022	020	019
F 2	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
T 200	xxx +023	+023	+022	+020	+016	+017	+028	+031	+028	+027	+027	+026	+027	+027	+028	+029	+028	+027	+026	+025	+024	+023	+022
T 160	xxx +025	+025	+024	+022	+019	+019	+030	+034	+032	+030	+030	+028	+028	+030	+031	+030	+031	+030	+028	+027	+025	+023	+022
T 120	xxx +028	+029	+029	+030	+028	+027	+033	+034	+031	+030	+026	+028	+030	+031	+032	+031	+031	+030	+026	+024	+021	+023	
T 80	xxx +033	+035	+035	+035	+035	+030	+027	+033	+038	+035	+032	+031	+025	+029	+031	+031	+030	+030	+028	+025	+019	+020	+023
T 40	xxx +037	+038	+037	+035	+035	+030	+028	+034	+033	+031	+028	+020	+024	+029	+029	+028	+029	+020	+016	+016	+016	+009	+002
T 20	xxx +038	+039	+036	+033	+029	+023	+022	+023	+022	+019	+011	+013	+013	+004	+005	+011	+012	+012	+012	+012	+012	+013	+015
T 4	xxx +039	+039	+034	+029	+027	+022	+019	+011	+014	+013	+013	+014	+013	+004	+005	+011	+012	+012	+012	+012	+011	+024	+026
T 2	xxx +039	+037	+024	+016	+019	+014	+011	+002	+007	+004	+006	+006	+006	+011	+015	+023	+035	+034	+034	+034	+034	+034	+037
C 1200	xxx -000	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	*
C 20	xxx -000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001

1/0173

170173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15											
088 1L3	093	098	091	093	088	086	084	086	086	080	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
113 1-7	101	091	085	059	086	077	060	057	057	056	055	053	053	053	053	053	053	053	053	053	053	053
044 049	042	037	029	029	032	031	039	033	041	036	035	035	035	035	035	035	035	035	035	035	035	035
044 050	050	059	060	063	064	057	050	049	049	040	039	038	038	038	038	038	038	038	038	038	038	038
F 200	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 140	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 120Z0	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 50	xxx 051	051	054	057	068	069	058	058	058	060	057	065	065	060	060	060	060	060	060	060	060	060
F 40	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 20	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 10	xxx 019	020	019	019	020	025	024	023	029	024	027	025	025	025	025	025	025	025	025	025	025	025
F 2	xxx 0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
+025	+025	+026	+028	+030	+032	+031	+029	+027	+030	+029	+029	+028	+029	+028	+029	+028	+029	+028	+029	+028	+029	+028
+027	+027	+028	+028	+031	+032	+033	+031	+029	+021	+026	+023	+017	+023	+011	+011	+011	+011	+011	+011	+011	+011	+011
+026	+026	+027	+027	+029	+033	+032	+032	+032	+025	+003	+006	+004	+005	+011	+007	+007	+007	+007	+007	+007	+007	+007
+023	+019	+021	+022	+024	+026	+027	+009	+020	+016	+011	+005	+001	+004	+007	+007	+007	+007	+007	+007	+007	+007	+007
+003	+003	+003	+003	+000	+005	+014	+028	+024	+015	+014	+015	+014	+014	+014	+014	+014	+014	+014	+014	+014	+014	+014
-021	-024	-034	-036	-041	-043	-039	-032	-024	-014	-007	-003	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
-027	-036	-043	-048	-047	-046	-041	-033	-025	-014	-007	-002	+001	+009	+000	+000	+000	+000	+000	+000	+000	+000	+000
-035	-040	-046	-051	-050	-051	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052	-052
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-002	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

170173	170173	180173	CABA UW
'41	1-16	16-17	17-18
D 200	xxx 058	062	053
D 80	xxx 051	057	044
D 10	xxx 036	045	032
F 200	xxx 07d	085	088
F 140Z0	xxx 0xx	xxx	xxx
F 120Z0	xxx 0xx	xxx	xxx
F 40	xxx 010	070	073
F 40Z0	xxx 0xx	xxx	xxx
F 20Z0	xxx 0xx	xxx	xxx
F 10	xxx 0xx	xxx	xxx
F 2	xxx 0xx	xxx	xxx
T 200	xxx +017	+015	+013
T 160	xxx +019	+017	+016
T 120	xxx +023	+022	+020
T 80	xxx +026	+026	+022
T 40	xxx +029	+029	+027
T 20	xxx +030	+030	+028
T 4	xxx +031	+030	+028
C 1200	xxx +000	+001	-000
CT 20	xxx -000	-000	-000

180173	180173	180173	CABA UW
049 053	050	047	048
040 048	046	042	037
031 036	035	031	026
081 066	078	076	083
XXX XXX	XXX XXX	XXX XXX	XXX XXX
XXX XXX	XXX XXX	XXX XXX	XXX XXX
072 070	057	059	068
XXX XXX	XXX XXX	XXX XXX	XXX XXX
049 045	034	032	034
040 046	047	046	048
031 036	035	031	026
082 085	080	087	088
XXX XXX	XXX XXX	XXX XXX	XXX XXX
XXX XXX	XXX XXX	XXX XXX	XXX XXX
073 075	071	069	070
XXX XXX	XXX XXX	XXX XXX	XXX XXX
043 045	046	048	045
040 045	047	046	048
032 027	023	027	035
042 040	045	046	048
045 057	061	060</td	

180173

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW
D 200	061 059 060 059 052 049 056 053 054 058 064 068 073 074 079 083 082 083 086 081 078 072 074 081												
D 80	058 046 049 050 044 039 046 036 042 052 061 071 075 075 081 082 080 077 076 073 065 051 052 064												
D 10	048 023 031 027 019 018 032 021 028 039 049 064 065 070 077 079 074 071 061 054 039 024 027 044												
F 200	055 056 063 068 068 066 070 060 060 057 063 072 080 076 070 073 070 069 060 048 040 040 044 047												
F120Z0	xxx												
F 80	047 049 059 057 054 058 054 047 047 044 051 059 059 050 055 051 049 050 046 035 029 033 039												
F 40Z0	xxx												
F 20Z0	xxx												
F 10	019 025 024 021 025 029 028 025 025 023 032 041 037 028 032 029 027 029 026 020 015 015 016 018												
F 2	xxx												
T 200	+009 +007 +016 +006 +004 +003 +003 +003 +003 +003 +002 +002 +001 +000 -001 -002 -003 -003 -005 -005 -005 -005												
T160	+013 +011 +009 +009 +007 +006 +006 +006 +006 +006 +005 +004 +004 +002 +001 -000 -000 -000 -001 -002 -002 -002												
T 120	+016 +014 +012 +012 +010 +009 +010 +009 +010 +009 +010 +009 +007 +008 +005 +004 +003 +003 +002 +002 +001 +001												
T 80	+019 +016 +014 +013 +013 +012 +012 +011 +012 +013 +013 +012 +011 +009 +008 +007 +006 +006 +006 +005 +005 +005												
T 40	+020 +016 +012 +013 +013 +013 +014 +014 +014 +015 +016 +017 +016 +014 +013 +012 +011 +010 +009 +008 +008 +007 +007												
T 20	+019 +013 +009 +011 +012 +013 +013 +015 +015 +016 +017 +018 +017 +016 +014 +013 +012 +011 +010 +009 +008 +007 +007												
T 9	+018 +012 +009 +010 +012 +013 +015 +015 +016 +018 +018 +016 +016 +014 +013 +012 +011 +011 +010 +009 +008 +007 +007												
T 2	+014 +008 +008 +009 +011 +013 +014 +015 +016 +016 +018 +018 +017 +016 +015 +014 +013 +012 +011 +011 +010 +009 +008 +007 +007												
C1200	-000 -000												
CT 20	-000 -000												

190173

GMT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	190173
078 065	061 070 072 074 077 081 083 071 082 085 088 090 092 099 099 092 D 200												
061 055	047 061 064 060 064 067 069 065 066 067 070 071 073 075 076 077 D 80												
037 037	027 046 052 049 052 055 052 057 055 054 055 055 055 059 059 057 D 10												
038 041	049 061 063 055 054 056 057 065 062 068 070 073 077 080 083 086 F 200												
xxx xxx	xxx												
034 058	044 049 047 045 043 046 048 049 045 044 046 047 048 049 048 050 F 120Z0												
xxx xxx	xxx												
017 018	021 023 026 024 023 024 024 026 027 027 028 029 030 031 032 036 F 40Z0												
xxx xxx	xxx												
-006 -007	-006 -010 -012 -013 -012 -011 -014 -012 -011 -011 -010 -010 -015 -015 -015 -016 -015 F 2												
-002 -003	-003 -006 -006 -006 -009 -010 -011 -010 -012 -010 -013 -014 -014 -015 -015 -016 -015 T 200												
+001 -001	-000 -003 -005 -006 -007 -008 -009 -010 -011 -012 -013 -014 -015 -016 -017 -012 -011 T 160												
+005 +004	+003 -000 -002 -003 -004 -005 -006 -007 -009 -011 -012 -013 -014 -015 -016 -008 -007 T 120												
+007 +007	+007 -015 +003 -001 -000 -001 -002 -003 -004 -005 -006 -007 -008 -009 -009 -008 -007 T 80												
+008 +007	+007 -005 +003 -002 -000 -001 -001 -002 -003 -004 -005 -006 -007 -008 -009 -008 -007 T 40												
+007 +007	+005 +004 -003 -002 -000 -001 -001 -002 -003 -004 -005 -006 -007 -008 -009 -008 -007 T 20												
+007 +006 +004 +005 -003 -002 -000 -001 -003 -002 -004 -005 -006 -007 -008 -009 -008 -007 T 9													
-001 -001	-001 -001 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 CT 200												
-000 -000	-000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 CT 20												

190173

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW
D 200	093 095 097 098 100 102 101 103 104 106 105 108 110 112 115 121 124 129 133 135 131 125 123 122												
D 80	091 093 095 096 099 101 100 099 098 097 097 096 098 099 104 108 107 106 110 103 100 099 104												
D 10	087 089 093 091 097 097 097 096 094 091 095 091 092 096 096 098 094 097 103 092 091 092 100												
F 200	058 062 066 068 073 075 069 066 069 066 064 064 065 066 064 069 071 075 073 078 071 071 073 074												
F160Z0	xxx												
F 80	047 050 054 054 053 054 056 050 052 054 051 050 044 048 046 046 046 051 057 058 063 063 061												
F 40Z0	xxx												
F 20Z0	xxx												
F 10	032 031 033 034 035 037 035 037 035 031 029 028 030 030 028 027 025 026 030 034 038 040 036 033												
F 2	xxx												
T 200	-015 -015 -016 -016 -016 -016 -017 -017 -018 -018 -018 -018 -018 -017 -017 -012 -006 -008 -005 -005 -003 -002												
T160	-011 -011 -012 -012 -013 -013 -013 -014 -014 -015 -015 -015 -015 -015 -015 -014 -014 -012 -009 -010 -005 -007												
T 120	-007 -007 -008 -009 -009 -010 -010 -011 -011 -011 -012 -012 -012 -012 -012 -011 -009 -009 -008 -007 -007 -006 -005												
T 40	+000 +000 -000 -001 -001 -001 -002 -002 -003 -004 -004 -004 -004 -004 -004 -005 -005 -006 -005 -004 -004 -004 -003 -003												
T 20	+002 +002 +002 +002 +000 +000 +000 -000 -001 -002 -002 -002 -002 -002 -003 -003 -004 -004 -004 -004 -002 -002 -001												
T 9	+003 +003 +002 +001 +001 +001 +000 -000 -001 -002 -002 -002 -002 -002 -003 -003 -004 -004 -003 -002 -002 -002 -001												
T 2	+003 +003 +002 +002 +001 +001 +001 -000 -001 -001 -001 -001 -002 -002 -002 -003 -003 -003 -002 -002 -002 -001 -001												
CT200	-000 -000												
CT 20	+000 +000 +000 +000 +000 +000 +000 -000												

200173

GMT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	200173
127 138	143 144 143 144 142 144 142 137 135 135 136 141 143 138 132 132 126 127 130 128 127												
112 115	114 111 112 116 117 119 120 118 119 120 123 121 130 128 123 124 121 122 125 122 122												
106 111	104 102 103 105 108 112 115 108 111 115 122 117 124 126 125 119 122 118 119 122 118 119												
076 082	078 077 078 083 085 083 082 091 095 098 095 086 081 079 082 087 093 093 099 107 118 F 200												
xxx xxx	xxx												
059 056	061 058 056 059 061 063 065 063 067 069 065 063 064 062 074 077 080 086 093 F 80												
xxx xxx	xxx												
034 032	036 034 034 033 035 034 039 037 036 036 039 046 047 042 045 050 045 051 053 052 053 061 F 40Z0												
xxx xxx	xxx												
-003 -005	-004 -008 -010 -011 -010 -007 -006 -006 -006 -006 -006 -006 -006 -006 -006 -006 -006 -006 -005 -005 -003												
-002 -007	-005 -009 -010 -010 -011 -008 -007 -004 -006 -008 -008 -007 -006 -004 -002 -001 -000 -002 -001 +000 T 200												
-006 -009	-009 -010 -009 -010 -009 -009 -008 -007 -006 -006 -005 -005 -004 -003 -001 -001 -003 +003 +002 +004 T 160												
-005 -007	-007 -008 -008 -008 -007 -006 -005 -004 -004 -003 -002 -002 -002 -001 +003 +003 +005 +007 +005 +006 +008 T 120												
-002 -003	-004 -005 -005 -005 -005 -004 -003 -002 -001 -000 -001 +001 +002 +004 +004 +006 +008 +009 +011 +013 +013 +011 +013 T 80												
-000 -001	-002 -003 -003 -003 -003 -002 -001 -000 +001 +002 +003 +004 +005 +007 +008 +010 +012 +014 +014 +011 +012 +014 T 40												
-000 -001 -002 -002 -002 -002 -001 -000 +001 +002 +004 +005 +006 +006 +008 +009 +011 +013 +013 +011 +013 T 20													
-000 -001 -002 -002 -002 -002 -001 -000 +001 +002 +004 +005 +006 +006 +008 +009 +011 +013 +013 +011 +013 T 9													
-000 -000													
-000 -000													
CT200	-000 -000												
CT 20	+000 -000 -000 -000 -000 -000												

212173

2001/3

210177

Scanning

210213

210173

210173

210173

230

64 of 100

220173

220173

220173

230173												240173				CABA UW	
GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03					
D 200	191	193	191	194	196	192	185	183	177	175	174	172	175	174	173	180	182
D 80	161	184	181	185	185	181	173	168	158	160	162	159	162	156	153	164	168
D 10	172	173	173	178	175	171	162	150	145	149	152	145	149	144	142	156	155
F 200	073	075	069	071	072	069	065	062	062	067	071	071	071	069	072	078	075
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx											
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	058	057	055	060	058	055	050	047	052	059	057	056	055	053	057	060	055
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx											
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	036	036	035	036	035	034	033	030	031	036	035	034	034	031	034	033	037
F 2	xxx	xxx	xxx	xxx	xxx	xxx											
T 200	+023	+023	+023	+023	+022	+020	+020	+019	+018	+018	+017	+017	+017	+017	+017	+017	+017
T 160	+026	+025	+025	+025	+024	+022	+022	+022	+021	+020	+020	+020	+020	+019	+019	+019	+018
T 120	+028	+028	+028	+027	+026	+025	+025	+024	+024	+023	+023	+023	+024	+023	+023	+019	+018
T 80	+030	+030	+030	+029	+028	+028	+028	+028	+027	+027	+027	+026	+026	+023	+023	+020	+019
T 40	+033	+033	+032	+032	+031	+029	+029	+029	+029	+029	+029	+026	+026	+026	+026	+026	+018
T 20	+034	+034	+033	+033	+032	+030	+032	+032	+031	+031	+031	+030	+030	+031	+030	+030	+018
T 10	+035	+034	+034	+033	+032	+031	+032	+032	+032	+032	+032	+031	+031	+031	+030	+030	+018
T 2	+035	+035	+034	+033	+032	+031	+031	+030	+029	+029	+030	+031	+031	+031	+030	+030	+031
C1200	-000	-000	-000	-000	-000	-002	-002	-002	-002	-002	-002	-002	-002	-000	-000	-000	-000
C1 20	-000	-000	-000	-000	-003	-004	-002	-002	-002	-002	-002	-002	-002	-001	-000	-000	-000

340173

240173

25247

20173

250173

03-04	04-05	05-06	06-07*	07-13	08-09	09-10	10-11	11-12	12-13	13-14	14-15
182	182	191	193	186	189	194	136	182	183	186	187
142	144	149	150	144	145	152	152	154	157	158	157
132	134	141	141	135	137	143	144	145	148	149	150
087	035	088	087	090	089	082	085	086	094	094	091
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
063	064	067	064	066	072	067	061	064	065	066	067
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
043	042	041	046	047	043	041	044	048	052	049	048
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
029	+028	+036	+034	+025	+031	+037	+019	+013	+015	+018	+019
023	+022	+024	+024	+018	+016	+016	+010	+007	+007	+008	+007
020	+016	+015	+016	+012	+010	+010	+008	+006	+006	+006	+005
020	+017	+016	+015	+013	+010	+010	+010	+008	+008	+008	+008
023	+020	+019	+018	+016	+014	+013	+013	+011	+011	+012	+012
025	+021	+020	+019	+018	+015	+015	+015	+012	+013	+013	+013
025	+022	+021	+020	+018	+016	+016	+013	+013	+014	+014	+015
026	+023	+021	+020	+019	+017	+016	+016	+014	+014	+015	+017
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	+000	-000	-000	+000	+000	+000	-000	-000	+000	+000	+000

250173

35013

24247

G.M.T	250173												260173			CABA UW								
	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	195	193	195	193	199	207	211	212	212	212	219	220	225	226	232	230	231	232	239	236	227	232		
D 80	192	185	184	189	194	202	208	209	210	209	208	208	204	202	199	205	202	207	205	212	222	217	208	213
D 10	165	164	171	170	178	199	207	201	209	203	207	210	202	196	192	199	198	207	204	214	220	209	201	212
F 200	061	062	072	080	086	056	044	079	069	067	064	068	072	075	077	083	086	084	095	096	102	096	094	104
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	040	048	061	060	060	062	059	057	050	049	048	056	055	049	056	059	064	066	068	064	062	071	074	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 10	013	022	031	029	028	031	028	029	026	028	028	038	035	033	031	034	039	040	042	038	036	041	045	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 200	+040	+040	+041	+041	+040	+037	+034	+032	+029	+026	+025	+026	+028	+031	+030	+037	+033	+037	+037	+037	+037	+038	+038	+037
F 160	-042	+043	+044	+045	+044	+043	+041	+038	+036	+033	+030	+027	+027	+028	+030	+030	+033	+031	+034	+035	+036	+036	+038	+037
F 120	-045	+046	+047	+047	+047	+046	+044	+041	+039	+037	+034	+030	+030	+030	+031	+032	+033	+033	+036	+037	+038	+040	+041	+040
F 80	-047	+049	+050	+050	+049	+048	+046	+043	+042	+040	+037	+034	+033	+034	+035	+036	+036	+037	+037	+038	+039	+041	+042	
F 40	-048	+049	+050	+050	+049	+050	+047	+046	+044	+043	+041	+038	+037	+037	+037	+038	+038	+039	+040	+041	+041	+043	+042	
F 20	-048	+049	+050	+050	+049	+050	+048	+046	+045	+044	+042	+039	+038	+039	+039	+039	+040	+041	+042	+043	+045	+044	+044	
F 10	-048	+049	+050	+049	+049	+050	+048	+046	+045	+044	+042	+040	+039	+039	+040	+040	+041	+042	+043	+044	+045	+046	+045	
F 2	-047	+047	+049	+048	+048	+048	+046	+045	+044	+044	+042	+040	+039	+039	+040	+040	+041	+042	+043	+044	+045	+046	+045	
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
C 120	+000	-000	+000	+000	-000	+000	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-010	-000	-000	

200173

2484

260173

	260173												270173				CABA UW								
GMT	15-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01	01-02	02-03				
DZ00	229	237	241	237	236	270	225	225	230	237	237	238	238	238	239	244	256	265	272	276	279	279	280	282	
D 80	220	224	235	231	228	223	219	218	225	232	231	231	232	232	234	237	246	257	266	268	269	268	270	270	
D 10	221	228	236	231	228	224	221	220	228	234	233	232	234	235	236	238	247	257	266	269	269	266	267	268	
FZ00	116	125	137	134	138	141	136	150	165	158	156	152	138	145	148	146	145	138	148	147	138	125	118	129	
F160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
F 80	093	094	107	104	099	104	104	114	131	130	123	120	105	110	117	113	109	103	117	111	096	088	094	094	
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
F 10	062	071	077	075	068	069	069	079	098	104	093	093	076	080	086	082	079	069	078	077	063	058	051	051	
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
T200	+055	+056	+057	+056	+058	+057	+056	+052	+041	+039	+039	+041	+043	+046	+047	+047	+050	+054	+057	+057	+052	+060	+060	+059	+059
T160	+058	+059	+060	+059	+060	+060	+059	+055	+044	+042	+042	+043	+045	+048	+049	+051	+056	+059	+059	+053	+060	+063	+062	+061	+061
T120	+061	+062	+063	+062	+062	+062	+062	+065	+046	+044	+044	+046	+047	+050	+051	+053	+058	+061	+061	+055	+065	+065	+065	+063	+063
T 40	+065	+065	+066	+065	+064	+065	+065	+061	+048	+047	+046	+049	+052	+053	+055	+059	+063	+064	+063	+057	+068	+067	+065	+065	+063
T 20	+069	+069	+069	+068	+067	+067	+067	+067	+064	+051	+050	+051	+052	+055	+056	+058	+062	+066	+066	+062	+070	+070	+069	+065	+065
T 9	+069	+069	+069	+068	+066	+066	+066	+066	+066	+065	+065	+065	+065	+065	+065	+065	+066	+066	+066	+062	+071	+071	+070	+064	+064
T 2	+069	+068	+067	+066	+064	+065	+066	+062	+052	+051	+050	+052	+053	+055	+056	+058	+062	+066	+065	+059	+068	+068	+068	+068	+061
CT200	+005	-000	-000	-000	-000	-000	-000	-000	-001	-004	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001	-008	-011	-000	-000
CT 20	-000	-000	+000	+000	+000	+000	+000	+000	+001	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	-002	-010	-010	-000	-000

270173

	270173												270173				CABA UW								
03-04	04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15				
283	232	285	284	286	285	287	284	290	293	292	292	292	295	295	293	295	305	301	301	304	304	304	D 200	D 200	
271	272	278	277	275	277	278	274	282	288	286	286	286	286	290	288	291	298	295	296	299	299	299	299	299	
268	270	277	276	274	275	275	271	280	287	286	285	287	287	290	289	287	292	297	295	295	299	299	299	D 10	
134	127	129	123	124	122	122	123	124	132	135	131	133	136	142	149	141	147	152	145	151	140	141	F 200	F 200	
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
097	090	096	094	097	096	094	099	104	112	107	106	110	115	123	127	124	131	128	120	131	118	121	F 80	F 80	
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
055	054	062	061	061	058	061	058	075	077	078	079	080	080	080	076	075	067	063	059	094	082	088	F 10	F 10	
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
*059	+059	+059	+058	+056	+055	+055	+054	+054	+054	+054	+053	+053	+054	+054	+055	+054	+057	+054	+053	+054	+053	+054	+054	+054	
*060	+041	+062	+060	+059	+058	+057	+057	+057	+057	+057	+057	+057	+057	+058	+058	+059	+059	+055	+051	+057	+053	+056	+057	T 200	T 200
*062	+003	+064	+063	+062	+062	+061	+060	+060	+061	+061	+060	+060	+061	+061	+062	+063	+061	+061	+061	+060	+060	+061	+061	+061	T 160
*063	+066	+067	+066	+065	+064	+064	+063	+063	+064	+064	+064	+064	+065	+065	+066	+067	+063	+051	+061	+064	+064	+065	+065	+065	T 120
*063	+067	+068	+067	+067	+066	+066	+065	+065	+066	+067	+066	+067	+066	+068	+068	+068	+069	+071	+069	+064	+064	+065	+065	+065	T 80
*063	+067	+069	+068	+067	+067	+066	+065	+066	+067	+068	+068	+068	+068	+068	+069	+070	+073	+070	+054	+068	+059	+068	+069	T 20	
*063	+067	+069	+068	+067	+067	+066	+065	+066	+067	+068	+068	+068	+068	+069	+071	+070	+071	+074	+072	+064	+070	+068	+070	+070	T 9
*061	+065	+067	+066	+066	+064	+064	+066	+066	+067	+068	+068	+068	+068	+069	+071	+072	+074	+072	+067	+069	+069	+069	+069	+069	T 2
*000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
*000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

270173

	270173												280173				CABA UW							
03-04	04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15			
336	331	331	339	343	338	334	333	333	335	332	330	331	323	323	324	322	317	319	314	317	309	307	D 200	D 200
330	327	320	332	335	334	328	324	318	319	324	324	328	322	323	321	319	324	321	318	323	305	304	D 80	D 80
322	314	310	323	326	321	303	295	289	291	299	304	317	313	306	314	326	318	317	323	305	304	D 10	D 10	
114	115	121	119	109	111	113																		

250173

280173

290173

S&BAUW

SHRT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	312	297	293	281	274	267	256	245	246	241	239	234
D 80	279	296	280	274	266	250	246	233	229	223	221	220
D 10	226	205	283	261	257	251	240	220	222	219	215	216
F 200	073	065	069	064	068	078	068	074	095	101	096	103
F 160Z0	x**	x**	x**	xxx								
F 120Z0	x**	x**	x**	xxx								
F 80	063	057	058	053	061	070	060	064	069	058	068	071
F 40Z0	x**	x**	x**	xxx								
F 20Z0	xxx											
F 10	040	030	029	025	033	036	030	033	035	037	034	040
F 2	xxy	xxx										
F 200	+049	+047	+046	+046	+045	+044	+044	+043	+041	+041	+041	+042
F 160	+052	+051	+050	+049	+049	+047	+047	+046	+043	+042	+041	+042
F 120	+055	+055	+054	+053	+052	+051	+050	+048	+045	+043	+042	+044
F 80	+059	+058	+057	+055	+055	+054	+051	+049	+046	+045	+046	+047
F 40	+061	+059	+058	+055	+054	+054	+051	+049	+046	+047	+048	+049
F 20	+062	+060	+057	+054	+054	+053	+051	+047	+046	+047	+048	+049
F 9	+063	+059	+056	+053	+052	+052	+049	+045	+049	+049	+050	+051
F 2	+062	+057	+053	+047	+048	+048	+044	+043	+047	+048	+049	+051
C 20J	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 21	-000	+000	-000	-000	-000	+000	+000	-000	-000	+000	-000	+000

290113

290173

290173

290173

300173

SABAUW

300173

300131

310173

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	310173	CABAUV										
D 200	231	232	226	229	234	236	235	235	235	232	238	241	244	246	262	330	330	331	322	327	329	341	352	341
D 80	223	224	219	222	225	226	221	219	223	223	230	237	235	235	252	332	332	329	316	321	322	335	349	334
D 10	223	223	220	223	224	227	218	217	220	229	236	235	235	246	330	333	333	313	318	322	327	338	314	
F 200	066	091	087	090	097	100	093	085	077	081	077	086	094	091	078	093	095	090	103	093	075	080	063	055
F160ZO	YXX	XXX	YXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX									
F120ZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
F 80	069	072	066	064	073	072	062	055	049	051	062	071	066	061	076	070	066	080	074	054	060	045	041	
F 40ZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
F 10	048	049	047	041	049	048	037	029	028	029	034	042	048	042	037	053	044	045	050	049	030	038	026	023
F 2	XXX	XXX	YXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX									
T 200	+066	+067	+067	+067	+067	+067	+068	+068	+067	+066	+065	+065	+065	+066	+064	+047	+047	+039	+035	+036	+035	+035	+042	
T160	+069	+070	+073	+070	+070	+070	+070	+070	+070	+069	+069	+069	+069	+069	+068	+067	+067	+065	+050	+048	+046	+040	+039	+033
T120	+072	+073	+073	+073	+073	+073	+072	+072	+070	+072	+071	+069	+068	+068	+063	+053	+050	+046	+046	+046	+046	+046	+048	
T 80	+076	+076	+076	+076	+076	+076	+076	+076	+075	+073	+072	+073	+073	+071	+070	+070	+069	+056	+055	+057	+051	+044	+046	+043
T 40	+079	+079	+079	+079	+079	+079	+079	+079	+075	+075	+078	+078	+078	+073	+072	+071	+071	+059	+056	+053	+056	+047	+048	+047
T 20	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+076	+074	+072	+060	+058	+057	+057	+049	+049	+046
T 9	+080	+080	+080	+080	+080	+080	+080	+080	+079	+079	+079	+079	+079	+075	+073	+072	+072	+061	+058	+057	+053	+049	+049	+046
T 2	+080	+080	+079	+080	+080	+080	+077	+075	+076	+076	+079	+079	+076	+074	+072	+072	+061	+059	+053	+052	+049	+049	+047	+046
C1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-002	-002	-000	-000	-000	-000	-000	-004	+002	-001	-001	-000	-000	-005
C 20	-000	+000	-000	-000	+000	-000	-000	+000	+000	+000	+002	+002	-001	-000	-010	-000	-000	-004	-004	+002	+001	-000	-002	-006

310173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	310173	CABAUV											
S26	525	325	322	319	323	322	321	315	313	314	311	311	307	301	289	280	295	300	299	303	294	280	272	D 200
S19	519	710	312	313	314	312	306	304	308	307	301	297	294	274	275	281	289	298	297	294	284	270	D 80	
S04	305	291	294	280	284	277	269	277	271	269	271	274	274	264	270	279	287	298	298	292	297	289	274	D 10
061	071	084	091	094	090	083	081	080	070	061	074	066	060	052	053	057	062	066	079	076	062	059	055	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160ZO												
051	050	059	067	065	064	061	059	063	061	055	066	063	054	036	039	052	061	072	069	060	056	056	056	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40ZO												
028	023	021	030	027	021	027	026	027	024	029	031	030	029	028	026	035	042	052	059	049	048	044	045	F 2020
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10												
+042	+043	+045	+044	+043	+043	+042	+042	+039	+040	+040	+040	+040	+039	+040	+040	+040	+040	+042	+044	+044	+041	+041	+038	T 200
+044	+046	+047	+046	+045	+046	+045	+044	+042	+043	+043	+043	+044	+043	+042	+044	+042	+044	+048	+048	+046	+045	+043	+043	T 160
+048	+049	+049	+047	+047	+047	+045	+045	+045	+046	+046	+046	+046	+046	+047	+044	+046	+048	+048	+048	+048	+046	+046	+046	T 120
+050	+051	+050	+047	+046	+046	+045	+046	+045	+046	+047	+048	+048	+048	+049	+049	+049	+052	+052	+052	+052	+052	+050	+050	T 80
+049	+049	+049	+048	+046	+042	+042	+041	+041	+039	+043	+041	+044	+044	+047	+049	+054	+056	+056	+059	+060	+056	+056	+054	T 40
+044	+040	+043	+039	+039	+035	+030	+028	+025	+025	+025	+029	+029	+028	+028	+028	+029	+029	+029	+029	+029	+026	+027	+023	T 20
+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	T 2
-0112	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT200
C 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

310173

04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	310173	CABAUV												
245	249	258	270	261	251	270	276	263	258	256	257	248	247	246	250	259	250	258	264	275	272	261	265	D 200
226	227	230	223	220	225	230	236	241	237	235	239	238	237	229	243	251	234	229	234	247	236	210	216	D 80
191	197	196	178	181	196	204	205	207	199	198	205	205	203	215	210	213	202	208	224	239	218	194	197	D 10
056	050	046	034	025	030	040	045	047	043	039	041	042	049	051	052	043	034	040	050	058	052	046	040	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160ZO
061	061	056	052	055	053	057	062	062	061	057	056	056	056	046	039	043	046	029	023	027	026	027	026	F 120ZO
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80
020	023	021	020	025	026	023	024	023	022	022	024	027	032	026	023	027	030	031	025	026	023	024	020	F 40ZO
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2020
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10
+039	+041	+040	+040	+038	+036	+037	+037	+039	+041	+042	+041	+040	+039	+039	+037	+037	+039	+041	+039	+039	+039	+039	+039	T 200
+041	+043	+042	+039	+036</																				

110373

010273

020273

SABAUW

020273

020273

020273

• • • • •

030273

030273

030273

2402

CABALLW

040273

040273

040273

040273

05027

CARAVW

050273

050273

050273												050273				060273				CAHAW
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03								
D 200	237	234	236	238	239	239	239	246	248	248	250	259	265	268	268	269	268	265		
D 40	227	224	226	230	229	227	228	233	232	231	234	235	238	238	237	240	238	259		
D 10	227	226	228	231	229	228	229	233	230	228	230	232	235	235	233	232	233	256		
F 200	095	100	104	106	111	114	117	120	121	120	119	120	119	115	105	103	095	108		
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	110													
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	108													
F 80	074	082	086	084	084	086	086	081	079	079	082	081	079	079	079	075	076	084		
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	086													
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	087													
F 10	052	056	064	064	063	063	060	059	054	052	053	053	051	053	051	049	044	046		
F 2	xxx	xxx	xxx	xxx	xxx	xxx	050													
T 200	+013	+014	+014	+014	+015	+016	+017	+019	+021	+024	+030	+040	+045	+047	+048	+049	+049	+051		
T 160	+015	+016	+016	+016	+017	+017	+018	+020	+021	+025	+029	+035	+040	+044	+047	+050	+051	+052		
T 120	+018	+018	+018	+018	+020	+020	+021	+023	+025	+027	+031	+036	+039	+041	+044	+048	+052	+050		
T 80	+022	+020	+020	+021	+022	+023	+024	+026	+027	+029	+034	+038	+040	+042	+043	+047	+046	+048		
T 40	+025	+026	+026	+026	+027	+027	+027	+028	+029	+031	+036	+040	+042	+043	+046	+047	+045	+046		
T 20	+026	+027	+027	+027	+028	+028	+029	+030	+030	+032	+037	+041	+043	+044	+045	+047	+046	+048		
T 9	+027	+028	+028	+028	+029	+029	+030	+030	+032	+037	+041	+043	+044	+045	+047	+045	+046	+049		
T 2	+024	+025	+025	+025	+027	+027	+029	+030	+030	+031	+036	+040	+042	+043	+044	+046	+042	+048		
	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*			
CT 200	-003	-000	-000	-000	-001	-002	-002	-003	-003	-004	-002	-000	-000	-000	-000	-000	-000	-000		
C 1 20	-003	+000	+000	-000	-003	-002	-002	-003	-004	-002	-002	-000	+000	-000	-000	-000	-000	-000		

070273

070273

2020-07

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	251	250	250	251	22>	248	250	249	246	245	243	243
D 80	245	243	241	241	242	240	242	241	237	237	234	234
D 10	247	247	245	243	243	243	246	242	236	238	236	235
F 200	118	133	137	139	134	127	135	131	129	140	141	147
F 1600	xxx	145	144									
F 1200	xxx	141	143									
F 80	096	111	113	108	100	097	102	095	097	109	107	113
F 40Z0	xxx	114	114									
F 20Z0	xxx	111	112									
F 10	079	083	082	082	074	071	073	068	067	078	081	083
F 2	xxx	084	086									
F 0	085	080	080	080	080	080	080	080	080	080	080	080
T 200	+068	+067	+067	+068	+068	+066	+067	+067	+066	+060	+060	+055
T 160	+071	+071	+071	+071	+071	+068	+070	+070	+068	+063	+062	+057
T 120	+075	+074	+074	+074	+073	+072	+073	+073	+071	+065	+064	+059
T 80	+079	+078	+077	+077	+076	+075	+076	+076	+075	+067	+066	+058
T 40	+083	+081	+081	+080	+079	+078	+079	+079	+077	+069	+068	+065
T 20	+084	+083	+082	+081	+080	+079	+080	+080	+078	+070	+069	+067
T 9	+065	+083	+082	+082	+081	+080	+080	+081	+078	+075	+069	+069
T 2	+084	+083	+081	+081	+080	+079	+080	+080	+077	+073	+069	+070
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	+000	+000	+000	+000	-000	-000	-002	-004

U8027.5

080273

080273

GMT	080273												090273			CABA UW	
	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03					
D20U	228	227	224	226	225	224	225	223	222	221	221	223	222	222	220	219	220
D 80	223	223	219	221	221	220	220	218	217	216	215	218	217	216	214	213	215
D 1U	226	226	222	224	224	223	224	224	222	220	220	217	220	220	218	218	217
F20U	147	148	148	154	158	157	155	168	164	167	169	171	168	170	166	171	169
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	170
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	173
F 80	115	121	120	128	126	132	128	139	132	138	140	137	136	137	135	138	136
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	144
F 20Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	141
F 10	087	089	088	096	095	098	099	102	100	098	100	093	097	096	094	098	093
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	094
T200	+052	+045	+062	+059	+051	+049	+037	+058	+059	+056	+048	+048	+049	+060	+055	+042	+044
T160	+055	+047	+060	+063	+054	+052	+040	+059	+062	+060	+051	+049	+064	+063	+059	+050	+047
T120	+057	+052	+069	+067	+057	+054	+047	+066	+065	+063	+053	+054	+047	+066	+063	+048	+057
T 80	+060	+063	+073	+071	+060	+057	+059	+069	+069	+066	+055	+054	+052	+059	+066	+061	+049
T 40	+062	+060	+075	+074	+063	+059	+053	+072	+072	+069	+057	+056	+055	+054	+053	+052	+067
T 20	+063	+057	+076	+075	+064	+060	+061	+074	+073	+071	+058	+057	+056	+072	+069	+057	+067
T 4	+064	+058	+076	+075	+069	+069	+060	+074	+073	+072	+059	+057	+057	+072	+070	+055	+068
T 2	+065	+057	+071	+074	+066	+061	+057	+073	+072	+071	+059	+058	+052	+070	+068	+055	+069
C1200	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
CT 200	-001	-008	-004	-001	-000	-001	-013	+003	-000	-000	-000	-001	-000	-000	-008	-005	-009
CT 20	-000	-014	-000	+000	+001	-001	-012	-000	-000	+001	-000	-004	-015	+000	+001	+002	+000

U90273

090273

090273

100273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	XXX 261	260 256	255 256	254 255	256 253	263 271	270 268	278 274	278 277	274 281	283 278	278 284
D 80	249 257	257 250	246 243	237 237	230 227	237 246	248 247	247 248	254 253	251 251	261 267	266 259
D 10	248 XXX	257 250	245 243	224 224	222 218	230 234	243 241	224 224	223 227	234 234	245 246	233 236
F 200	XXX 108	114 099	093 087	090 097	097 100	111 102	072 080	089 097	101 101	103 104	097 095	094 096
F 160Z0	XXX XXX											
F 120Z0	XXX XXX											
F 80	085 085	097 078	075 071	074 067	082 083	090 079	074 075	071 074	082 083	084 086	087 079	075
F 40Z0	XXX XXX											
F 20Z0	XXX XXX											
F 1u	058 058	054 048	047 042	040 045	036 034	042 041	040 039	032 042	043 044	043 037	039 039	037 030
F 2	XXX XXX											
T 200	+045 +047	+047 +045	+044 +043	+043 +045	+044 +043	+047 +043	+038 +040	+044 +044	+044 +043	+040 +038	+037 +036	+035 +034
T 160	+049 +050	+050 +048	+047 +046	+045 +047	+043 +042	+046 +045	+040 +042	+046 +046	+046 +045	+042 +041	+040 +039	+038 +037
T 120	+052 +053	+053 +051	+050 +048	+046 +047	+043 +042	+042 +042	+041 +043	+047 +047	+048 +047	+045 +045	+043 +043	+042 +038
T 80	+055 +055	+055 +054	+052 +050	+048 +047	+043 +040	+040 +040	+039 +037	+040 +042	+045 +045	+042 +042	+042 +043	+039 +035
T 40	+058 +057	+057 +055	+054 +052	+048 +044	+039 +036	+036 +037	+037 +037	+039 +036	+035 +035	+037 +038	+035 +036	+037 +035
T 20	+059 +056	+056 +055	+054 +050	+044 +039	+034 +031	+033 +033	+037 +034	+030 +026	+026 +026	+028 +025	+029 +032	+033 +030
T 9	+058 +056	+056 +053	+050 +046	+039 +035	+029 +028	+028 +029	+029 +034	+029 +024	+021 +020	+021 +019	+020 +024	+025 +022
T 2	+056 +053	+052 +048	+044 +039	+032 +029	+021 +023	+022 +024	+027 +016	+013 +015	+016 +014	+009 +010	+013 +013	+009 +004
CT 200	XXX -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	+000 +000	+000 +000	+000 +000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000

100273

100273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
282 279	278 268	275 277	270 276	272 272	271 248	267 261	259 257	259 248	248 270	286 284	284 280
264 262	259 256	260 259	262 257	259 259	259 262	256 254	259 244	239 239	260 282	280 279	277 278
233 230	239 241	242 252	260 255	252 255	257 257	260 258	257 262	246 238	257 281	279 279	278 D 10
092 094	094 097	098 097	115 115	121 117	120 110	110 113	118 105	126 135	130 128	133 134	F 200
XXX XXX	F 160Z0										
078 078	082 054	080 078	071 097	093 094	092 094	097 095	095 105	096 101	097 098	105 105	109 114
XXX XXX	F 40Z0										
037 040	043 043	034 038	042 036	052 055	060 062	069 075	084 076	077 077	071 073	082 078	081 077
XXX XXX	F 10										
*053 +052	+050 +053	+029 +030	+021 +019	+022 +031	+029 +029	+028 +027	+028 +032	+034 +021	+010 +010	+023 +019	+023 +040
+036 +035	+032 +029	+030 +021	+019 +022	+022 +031	+031 +031	+032 +028	+032 +032	+013 +013	+012 +025	+025 +022	+030 +044
+038 +037	+034 +031	+032 +024	+021 +025	+032 +033	+031 +031	+030 +032	+036 +038	+024 +013	+012 +025	+027 +030	+043 +044
+037 +037	+034 +030	+031 +025	+026 +026	+033 +033	+033 +034	+034 +033	+036 +040	+042 +027	+016 +014	+027 +030	+041 +047
+029 +051	+030 +028	+028 +028	+025 +025	+022 +024	+034 +034	+035 +036	+036 +040	+046 +031	+019 +019	+028 +028	+041 +050
+025 +025	+023 +023	+024 +024	+021 +024	+033 +034	+036 +037	+038 +042	+047 +047	+047 +033	+020 +018	+031 +029	+045 +051
+017 +016	+015 +022	+018 +019	+020 +022	+032 +033	+036 +037	+038 +042	+047 +048	+048 +034	+021 +019	+031 +031	+046 +052
+007 +007	+009 +016	+012 +014	+015 +019	+028 +030	+035 +035	+038 +044	+048 +048	+032 +023	+032 +032	+036 +051	+051 +050
* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *
-000 -000	-000 -000	-001 -001	-003 -003	-011 -016	-001 -000	-000 -000	-001 -001	-000 -000	-000 -000	-000 -000	CT 200
+000 +000	+000 -000	-000 -000	-003 -008	-004 -001	+008 +003	+000 +000	-000 -000	-000 -000	+001 +000	-000 -000	-014 -006

100273

100273

110273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	278 289	297 308	315 309	305 308	312 308	312 320	317 316	320 324	328 332	334 332	335 348	345 347
D 80	272 283	291 307	314 300	297 286	298 298	318 318	317 321	324 328	334 330	335 345	342 345	343 335
D 10	272 282	291 305	314 314	295 292	270 285	280 288	314 315	315 313	321 326	330 326	331 341	334 333
F 200	127 152	140 132	137 113	108 102	112 112	094 119	132 159	144 149	154 154	139 123	135 110	096 107
F 160Z0	XXX XXX											
F 120Z0	XXX XXX											
F 80	103 126	122 113	122 077	077 072	080 068	068 075	104 118	104 116	117 117	108 102	103 090	089 074
F 40Z0	XXX XXX											
F 20Z0	XXX XXX											
F 10	069 090	080 074	085 085	041 039	041 040	040 039	066 072	059 077	068 068	071 064	062 058	051 041
F 2	XXX XXX											
T 200	+038 +024	+033 +033	+007 -000	+002 +005	+005 +005	+005 +004	+013 +014	+014 +014	+021 +017	+023 +022	+020 +019	+016 +012
T 160	+041 +034	+036 +036	+009 +010	+002 +006	+007 +006	+006 +006	+013 +016	+016 +016	+025 +018	+024 +020	+026 +018	+021 +012
T 120	+044 +044	+039 +039	+011 +011	+002 +006	+008 +008	+008 +008	+013 +018	+018 +018	+023 +023	+026 +032	+029 +029	+025 +014
T 80	+047 +034	+042 +042	+012 +012	+003 +006	+009 +009	+014 +019	+019 +019	+019 +019	+030 +030	+028 +028	+030 +030	+027 +015
T 40	+049 +043	+043 +043	+014 +014	+002 +003	+005 +010	+010 +013	+013 +020	+020 +020	+022 +026	+028 +024	+028 +028	+027 +025
T 20	+050 +050	+043 +043	+015 +015	+002 +004	+005 +010	+010 +011	+013 +020	+021 +021	+031 +031	+028 +028	+028 +028	+026 +021
T 9	+050 +050	+043 +043	+015 +015	+002 +004	+005 +009	+010 +010	+012 +020	+020 +020	+017 +017	+015 +015	+024 +024	+018 +015
T 2	+049 +048	+040 +040	+015 +015	+002 +003	+004 +004	+008 +009	+010 +018	+019 +019	+012 +013	+024 +024	+019 +020	+019 +012
CT 20J	-001 -014	-006 -000	-001 -001	-002 +000	+000 +000	-000 -000	+000 +000	-000 -000	+004 -008	-005 -005	+003 +007	-002 -000
CT 20	+000 +002	-002 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	+003 -003	-003 -006	-001 -001	+000 +000

110273

110273

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
341 339	340 338	334 346	336 340	347 337								

110273

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW												
D 200	288	282	273	267	262	256	254	257	260	253	245	246	242	245	239	240	240	235	232	233	231	233	232	231	
D 80	286	276	265	255	253	239	236	240	242	238	234	234	228	230	221	227	229	228	224	224	224	227	226	224	224
D 10	285	275	262	244	249	219	218	226	239	236	231	232	228	224	219	225	229	225	225	225	225	225	225	225	228
F 200	088	091	084	087	099	091	097	116	113	116	118	127	127	132	124	132	136	137	137	140	146	150	150	151	151
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	078	080	070	066	042	066	075	083	088	086	092	093	091	095	089	092	099	103	101	103	109	115	118	121	121
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	054	053	042	040	045	034	040	048	053	062	063	065	062	063	055	060	069	072	070	072	077	083	082	086	086
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+039	+033	+037	+036	+036	+036	+035	+035	+037	+039	+035	+035	+035	+039	+038	+040	+042	+041	+041	+042	+043	+042	+041	+041	+041
T 160	+043	+042	+040	+040	+039	+039	+037	+034	+038	+039	+037	+037	+037	+040	+038	+040	+043	+042	+042	+044	+045	+044	+044	+044	+044
T 120	+047	+046	+044	+042	+043	+041	+037	+034	+040	+040	+039	+041	+039	+042	+044	+044	+045	+045	+046	+047	+047	+047	+047	+047	+047
T 80	+050	+049	+047	+045	+044	+042	+042	+037	+035	+039	+043	+042	+041	+041	+042	+044	+045	+045	+046	+046	+047	+048	+049	+050	+050
T 40	+053	+051	+049	+046	+045	+041	+035	+034	+040	+045	+045	+044	+045	+043	+046	+049	+050	+050	+051	+053	+052	+053	+053	+053	
T 20	+055	+052	+049	+045	+044	+039	+031	+030	+040	+046	+046	+045	+045	+046	+044	+047	+050	+051	+052	+052	+053	+053	+054	+054	
T 4	+055	+052	+046	+041	+035	+028	+028	+028	+040	+046	+046	+045	+045	+045	+046	+050	+051	+052	+052	+054	+054	+054	+054	+054	
T 2	+055	+051	+044	+030	+035	+026	+024	+038	+045	+045	+044	+044	+044	+045	+045	+046	+049	+050	+051	+053	+053	+054	+054	+054	
CT 203	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 20	-000	-000	-000	-000	+000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	

120273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	120273												
229	229	228	225	224	224	224	221	222	220	219	219	218	217	217	219	219	218	216	214	212	D 200			
223	226	223	220	218	219	218	216	217	216	216	215	214	213	212	213	214	214	213	212	210	208	D 80		
224	225	228	223	221	220	219	220	218	220	218	217	216	217	216	216	217	216	215	215	212	210	D 10		
193	166	166	161	162	168	178	177	184	182	186	195	202	204	212	210	206	206	214	210	212	210	220	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0	
123	132	136	133	131	135	142	146	149	154	160	163	169	180	178	174	176	171	178	178	187	F 80			
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0	
088	092	096	102	098	096	098	105	106	099	110	109	110	116	119	122	129	129	126	126	126	131	F 20Z0		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10	
*U41	+042	+043	+043	+042	+038	+041	+043	+046	+047	+047	+048	+049	+050	+050	+050	+051	+052	+054	+055	+055	+057	+057	+056	T 200
+044	+045	+046	+046	+042	+043	+045	+048	+049	+050	+050	+051	+052	+052	+052	+053	+055	+056	+056	+057	+059	+059	+059	+059	T 160
+048	+048	+049	+049	+042	+045	+047	+050	+051	+052	+052	+053	+054	+054	+054	+055	+056	+056	+057	+059	+059	+059	+059	+059	T 120
+051	+051	+052	+053	+052	+044	+047	+049	+052	+053	+054	+054	+055	+056	+056	+057	+057	+058	+059	+061	+061	+061	+061	+061	T 80
+054	+055	+056	+056	+056	+047	+049	+051	+054	+055	+056	+056	+056	+057	+057	+058	+059	+060	+061	+063	+063	+064	+065	+065	T 40
+055	+056	+057	+057	+057	+048	+050	+052	+055	+056	+057	+057	+057	+058	+059	+060	+060	+060	+060	+062	+064	+065	+066	+066	T 20
+055	+056	+056	+056	+056	+057	+057	+057	+057	+058	+058	+059	+060	+060	+060	+061	+063	+064	+065	+066	+067	+067	+067	+067	T 9
*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	T 2
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
CT 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

120273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	120273													
258	252	240	237	234	236	230	233	224	220	217	218	219	222	227	234	233	235	239	244	243	249	247	248	253	239
252	245	235	228	226	224	227	217	213	214	212	214	215	218	225	231	235	239	238	245	247	242	240	256	231	260
251	246	236	229	227	226	225	228	217	213	214	216	217	222	228	235	239	237	241	249	248	245	245	245	245	226
F 200	233	227	202	193	187	181	173	130	138	148	131	152	152	140	154	151	145	145	125	125	130	125	128	112	117
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	194	188	170	158	152	149	148	111	110	122	106	127	125	108	120	118	112	094	094	102	099	097	090	086	086
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	137	134	127	119	113	113	114	081	078	090	072	085	079												

130273												130273												140273									
GMT	15-16			16-17			17-18			18-19			19-20			20-21			21-22			22-23			23-24			00-01		01-02		02-03	
D200	247	242	233	235	234	234	232	231	228	234	214	218	231	233	225	213	217	227	224	226	217	218	222	216									
D 80	243	236	225	228	227	227	221	224	221	222	206	212	225	228	224	205	210	221	217	213	209	214	218	209									
D 10	245	237	226	228	228	227	222	223	222	222	207	213	226	229	224	206	210	221	218	211	209	216	221	210									
F200	149	126	121	135	133	131	128	136	141	134	123	126	118	109	109	111	113	115	107	103	115	111	114	134									
F160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F 80	121	109	102	113	110	100	096	102	107	117	099	101	098	092	082	084	086	088	073	077	093	088	086	096									
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F 10	036	081	074	085	080	064	065	067	073	085	064	068	072	068	052	054	059	062	050	049	061	062	065	065									
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
T200	+024	+023	+019	+022	+016	+015	+011	+007	+005	+004	+003	-002	-002	-004	-004	-006	-006	-007	-006	-006	-005	-008	-010	-013	-006								
T160	+027	+026	+022	+021	+018	+017	+011	+010	+007	+005	+005	+001	+002	-001	-002	-004	-005	-004	-004	-005	-006	-007	-010	-005									
T120	+031	+029	+025	+028	+022	+018	+014	+012	+009	+006	+008	+004	+003	+000	-001	-002	-003	-003	-003	-004	-005	-005	-009	-008									
T 80	+034	+033	+026	+022	+022	+019	+016	+014	+012	+008	+011	+008	+005	+002	+000	-001	-000	-000	-001	-001	-001	-001	-001	-003	-002								
T 40	+037	+036	+031	+033	+027	+020	+018	+016	+014	+011	+013	+011	+008	+005	+001	+001	+002	+001	+001	-001	-001	-001	-000	-003	-006								
T 20	+038	+036	+031	+034	+028	+020	+018	+016	+015	+012	+014	+012	+010	+006	+002	+002	+003	+002	+001	+001	-001	-002	-000	-003	-004								
T 9	+038	+036	+032	+035	+027	+019	+018	+016	+015	+012	+014	+012	+014	+009	+002	+002	+003	+002	+002	+001	-001	-001	-002	-000	-004								
T 2	+036	+035	+031	+032	+025	+017	+016	+014	+014	+012	+014	+012	+014	+009	+002	+002	+003	+002	+002	+000	+001	+001	+002	+004	+004								
	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*					
CT200	-000	-000	-000	+002	+009	+003	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-002	-002	-002	-002	-002	-003						
CT 20	+000	+000	+004	+018	+005	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-002	-002	-002	-002	-002	-003						

150273

150273

150273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03																			
D 200	135	122	114	108	108	103	109	112	114	112	109	104	109	110	107	094	097	094	089	090	078	069	063	070							
D 80	137	118	106	103	100	101	093	090	102	091	078	075	086	085	093	075	079	073	073	080	072	080	092	073	050	038					
D 10	134	110	091	096	090	085	070	064	087	071	040	032	052	044	043	040	038	039	042	047	046	047	050	038	046	047	050	038			
F 200	048	043	052	067	053	053	058	058	057	062	062	058	052	053	043	042	043	049	049	045	047	050	054	059	055						
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	039	034	047	060	046	040	033	037	035	038	041	049	053	050	049	054	052	055	052	054	061	064	065	058							
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	030	021	026	036	021	018	013	012	009	011	012	015	017	019	021	020	024	024	020	019	022	022	022	022	022	022	022	022	022		
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
T 200	+036	+037	+036	+031	+031	+031	+034	+037	+038	+041	+041	+043	+046	+047	+043	+049	+049	+049	+048	+050	+051	+049	+049	+050	+048						
T 160	+041	+041	+040	+035	+035	+034	+036	+038	+041	+041	+041	+046	+049	+050	+052	+051	+049	+049	+049	+052	+053	+046	+048	+050	+045						
T 120	+044	+044	+043	+038	+039	+037	+038	+039	+041	+041	+040	+042	+050	+050	+054	+048	+048	+048	+047	+048	+033	+039	+048	+033							
T 80	+047	+048	+046	+041	+042	+040	+040	+041	+041	+040	+041	+046	+046	+047	+044	+043	+038	+037	+034	+025	+027	+036	+021								
T 40	+051	+051	+049	+043	+043	+042	+042	+041	+041	+041	+041	+039	+037	+040	+040	+040	+043	+037	+035	+032	+028	+022	+018	+019	+013						
T 20	+053	+053	+050	+044	+043	+042	+042	+041	+040	+040	+040	+037	+034	+036	+036	+033	+033	+033	+033	+030	+027	+025	+019	+015	+012	+006					
T 2	+054	+054	+050	+045	+043	+041	+041	+040	+039	+037	+037	+035	+030	+027	+029	+029	+027	+027	+025	+023	+018	+015	+011	+006	+002	+004	+002	+004	+004		
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		
CT 20	-000	-300	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		

160273

160273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15																			
U 03	073	062	077	079	075	082	085	087	092	076	078	081	076	067	071	063	041	034	042	042	043	037	033	D 200						
U 73	053	070	066	065	069	065	069	063	060	045	047	053	049	048	048	041	032	031	026	027	030	028	D 10							
U 040	051	049	043	049	040	050	037	040	029	033	037	035	037	042	042	035	025	022	026	027	030	028	D 10							
U 49	051	061	067	076	089	092	092	086	084	086	084	076	081	085	079	073	061	062	071	084	086	079	F 200							
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
U 06	053	073	075	068	060	069	075	071	067	072	073	071	068	068	068	057	068	070	070	070	070	070	F 160Z0							
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
U 25	027	030	027	026	026	028	028	029	039	042	039	041	040	046	055	052	053	054	054	054	054	054	F 20Z0							
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
+U 06	+054	+058	+034	+027	+030	+031	+030	+029	+025	+020	+020	+002	+008	+013	+012	+005	+010	+010	+010	+010	+002	+004	+006	+012	+018					
+U 39	+023	+031	+028	+019	+029	+024	+015	+014	+010	+002	+001	+005	+003	+001	+005	+008	+015	+013	+000	+003	+008	+015	+022	T 200						
+U 24	+013	+021	+013	+001	+011	+000	+000	+000	+004	+006	+004	+001	+001	+006	+011	+018	+015	+002	+005	+011	+018	+025	T 160							
+U 15	+006	+004	+002	+003	+003	+005	+005	+005	+006	+007	+004	+000	+000	+004	+009	+014	+022	+018	+006	+008	+014	+022	+028	T 120						
+U 69	+003	+003	+001	+002	+005	+006	+005	+005	+006	+007	+004	+000	+000	+004	+009	+014	+022	+018	+006	+008	+014	+022	+028	T 80						
+U 63	+003	+003	+001	+002	+005	+006	+005	+005	+006	+007	+004	+000	+000	+004	+009	+014	+022	+018	+006	+008	+014	+022	+028	T 40						
+U 03	+003	+032	+032	+030	+030	+037	+037	+035	+034	+032	+032	+030	+030	+030	+030	+035	+034	+034	+034	+034	+034	+034	+034	+034	+034	+034	+034	+034		
+U 02	+039	+035	+032	+033	+030	+030	+037	+033	+030	+032	+022	+024	+021	+017	+018	+019	+021	+020	+023	+019	+021	+021	+021	+021	+021	+021	+021	+021	+021	
+U 200	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 200	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 20	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	

160273	170273	CABA UW										
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	030	024	020	025	026	023	027	027	020	013	009	003
D 80	xxx	024	021	019	020	017	018	016	010	001	355	351
D 10	026	016	014	009	006	004	357	359	342	322	310	306
F 200	069	066	081	082	081	086	085	074	064	066	060	057
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	xxx	061	060	079	077	069	067	0				



190273

190273

200273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D 00	xxx	xxx	xxx	xxx	xxx	347	347	350	357	002	002	348	344	337	317	320	305	283	315	320	304	296	292		
D 08	xxx	xxx	xxx	xxx	xxx	xxx	330	345	334	335	334	338	326	322	330	314	325	325	315	315	304	288	289	283	
D 10	xxx	xxx	xxx	xxx	xxx	311	315	309	296	305	297	279	280	304	294	316	289	250	262	254	248	275	266		
F 200	xxx	xxx	xxx	xxx	xxx	040	029	034	033	030	025	023	021	027	031	021	016	018	030	031	031	036	037		
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	xxx	040	035	038	035	033	024	022	022	028	036	043	032	025	026	021	020	038							
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	xxx	016	016	021	014	011	007	011	010	017	020	015	011	012	005	012	022								
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
T 200	xxx	xxx	xxx	xxx	xxx	xxx	+054	+054	+054	+054	+055	+055	+056	+058	+059	+059	+058	+058	+058	+057	+054	+054	+055	+056	+055
T 160	xxx	xxx	xxx	xxx	xxx	xxx	+055	+058	+057	+057	+057	+058	+059	+062	+062	+060	+061	+059	+056	+056	+057	+058	+058	+058	+058
T 120	xxx	xxx	xxx	xxx	xxx	xxx	+058	+061	+059	+059	+058	+059	+059	+062	+063	+065	+061	+062	+061	+058	+059	+059	+061	+061	+061
T 80	xxx	xxx	xxx	xxx	xxx	xxx	+059	+062	+059	+060	+059	+059	+058	+057	+062	+064	+060	+062	+060	+058	+061	+060	+064	+064	+064
T 40	xxx	xxx	xxx	xxx	xxx	xxx	+059	+060	+059	+057	+057	+057	+056	+058	+059	+056	+057	+057	+057	+058	+059	+060	+063	+063	+063
T 20	xxx	xxx	xxx	xxx	xxx	xxx	+059	+059	+058	+058	+057	+057	+056	+056	+056	+056	+055	+055	+056	+057	+057	+058	+058	+058	+058
T 9	xxx	xxx	xxx	xxx	xxx	xxx	+060	+058	+058	+056	+056	+056	+056	+055	+055	+055	+055	+055	+055	+055	+055	+055	+055	+055	+055
T 2	xxx	xxx	xxx	xxx	xxx	xxx	+059	+056	+057	+055	+055	+054	+054	+054	+054	+053	+053	+053	+053	+053	+053	+052	+052	+055	+055
C 7200	xxx	xxx	xxx	xxx	xxx	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 1 20	xxx	xxx	xxx	xxx	xxx	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

200273

200273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
276	275	283	278	275	275	288	296	305	291	279	xxx	260	268	261	257	272	267	265	264	260	267	274	D 200	
264	262	260	256	259	264	266	255	252	244	247	242	235	237	226	221	244	243	250	255	247	251	264	D 80	
248	256	250	248	257	258	263	238	242	218	232	218	223	228	221	214	240	236	247	247	246	250	263	D 10	
033	043	047	052	063	070	073	063	062	059	056	060	062	054	054	060	066	072	080	074	076	075	078	078	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0											
036	041	048	053	056	060	059	054	039	035	024	038	031	041	042	033	049	052	051	054	057	063	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
021	023	023	025	026	030	031	030	028	019	018	018	029	023	030	030	039	038	041	043	043	046	049	T 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10											
+055	+055	+057	+058	+056	+055	+055	+056	+063	+064	+061	+059	+063	+063	+066	+069	+067	+073	+076	+074	+070	+072	+070	+068	T 200
+058	+057	+059	+059	+057	+059	+059	+063	+066	+063	+060	+060	+062	+061	+064	+066	+067	+074	+073	+074	+073	+070	+070	+070	T 160
+061	+059	+059	+061	+060	+059	+060	+066	+064	+064	+062	+060	+061	+061	+063	+067	+068	+075	+078	+075	+077	+076	+073	+073	T 120
+064	+062	+061	+061	+060	+059	+060	+062	+062	+061	+062	+061	+061	+062	+062	+063	+067	+072	+075	+079	+077	+076	+079	+075	T 80
+065	+062	+061	+061	+061	+060	+060	+062	+064	+063	+065	+064	+066	+064	+066	+066	+069	+072	+075	+079	+082	+082	+085	+082	+T 40
+066	+062	+061	+062	+062	+061	+063	+064	+064	+066	+066	+066	+068	+071	+074	+077	+081	+084	+087	+084	+086	+084	+086	+080	+T 20
+058	+060	+060	+061	+062	+061	+061	+063	+064	+064	+066	+066	+068	+068	+068	+068	+069	+070	+078	+085	+087	+085	+085	+080	T 9
+056	+059	+060	+061	+061	+061	+062	+062	+064	+064	+067	+067	+071	+074	+076	+078	+080	+082	+085	+087	+085	+087	+085	+080	T 2
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

200273

200273

03-14	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
267	264	268	276	277	272	267	268	267	270	270	270	270	270	272	272	271	271	274	276	279	279	D 200		
250	251	260	266	261	257	256	256	257	261	267	264	265	267	267	267	267	266	267	269	272	272	D 80		
242	246	257	265	258	254	252	252	253	252	259	266	263	264	268	269	265	266	266	268	268	271	D 10		
120	137	111	116	116	116	113	121	122	124	126	xxx	xxx	125	129	132	133	133	133	133	129	127	F 200		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0												
086	080	096	082	075	078	077	079	091	096	093	099	107	105	098	104	106	108	110	112	xxx	xxx	xxx	xxx	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
053	050	064	056	051	044	047	052	059	064	061	068	075	072	073	076	076	075	083	080	077	067	067	F 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2												
+072	+065	+063	+061	+064	+066	+066	+068	+068	+066	+067	+069	+070	+070	+070	+070	+070	+070	+070	+070	+070	+070	+070	T 200	
+074	+068	+066	+064	+0																				

210273

210273

220273

CABA UW

UNT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	xxx 281	283 284	283 291	295 302	312 299	294 293	291 301	296 298	308 304	299 301	298 300	293 288
D 80	yyy 274	274 276	273 280	288 292	295 285	280 274	281 282	287 294	290 284	285 286	287 282	275 275
D 10	273 xxx 274	276 271	277 287	292 293	280 275	266 263	269 274	279 287	291 272	273 273	281 282	278 268
F200	xxx 127	126 124	120 119	116 115	105 095	093 093	099 109	103 096	106 112	110 114	114 114	112 113
F120Z0	xxx xxx 2xx											
F120Z0	xxx xxx 2xx											
F 80	xxx 099	097 096	091 091	092 089	076 070	073 076	080 083	078 073	077 078	081 087	088 087	091 089
F 40Z0	xxx xxx 2xx											
F 20Z0	xxx xxx 2xx											
F 10	069 xxx 067	064 059	060 059	058 043	037 037	038 037	042 038	035 036	034 035	045 050	051 050	047 047
F 2	xxx xxx 2xx											
F200	xxx +061	+059 +058	+063 +064	+063 +063	+066 +062	+062 +062	+061 +062	+067 +064	+060 +058	+056 +054	+053 +051	+050 +048 +044
F 160	xxx +062	+061 +060	+058 +063	+067 +066	+068 +064	+064 +063	+063 +063	+068 +066	+062 +059	+057 +056	+055 +053	+053 +051 +047
F 120	xxx +064	+064 +063	+068 +065	+070 +068	+070 +067	+067 +066	+065 +065	+069 +068	+068 +065	+067 +068	+058 +057	+056 +055 +053
F 80	xxx +065	+067 +067	+071 +072	+073 +071	+071 +069	+068 +067	+065 +065	+068 +069	+067 +063	+065 +058	+057 +056	+055 +049
F 40	xxx +069	+068 +068	+073 +074	+076 +074	+073 +070	+070 +069	+066 +065	+065 +067	+066 +063	+058 +056	+057 +056	+056 +051
F 20	xxx +070	+070 +071	+075 +076	+077 +075	+075 +073	+070 +068	+063 +062	+065 +067	+065 +062	+057 +054	+056 +060	+059 +056 +051
F 9	xxx +071	+075 +072	+075 +076	+077 +075	+073 +073	+068 +068	+067 +061	+062 +065	+066 +062	+055 +052	+059 +059	+055 +049
F 2	xxx +070	+070 +065	+069 +071	+076 +074	+074 +071	+066 +063	+055 +061	+063 +064	+058 +056	+050 +048	+053 +057	+056 +051 +044
C 203	xxx -000	-001 -003	+002 +001	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
C 21	xxx -001	-005 -005	-000 -000	-000 -000	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

220273

220273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
291	291 283	286 285	285 283	284 282	284 283	277 279	284 287	289 287	290 297	288 291	295 299
276	279 275	271 271	272 273	274 273	275 278	277 272	275 280	284 286	288 284	284 287	293 296
264	264 263	261 262	265 269	270 273	273 278	274 275	282 285	286 284	287 294	285 288	293 297
113	116 122	122 124	128 124	124 117	117 114	120 118	121 127	131 126	129 133	133 132	136 141
XXX	XXX XXX										
XXX	XXX XXX										
U06	U91 095	094 092	091 087	088 085	089 097	096 102	111 117	117 120	117 119	119 132	136 129
X42	XXX XXX										
U41	045 043	043 045	045 046	047 046	049 047	046 049	050 072	073 082	086 088	086 093	091 097
XXX	XXX XXX										
+042	+041 +041	+032 +033	+037 +037	+037 +038	+038 +039	+040 +041	+041 +042	+043 +044	+045 +045	+045 +045	+046 +045
+045	+043 +042	+040 +039	+039 +040	+041 +041	+042 +043	+044 +046	+048 +048	+049 +050	+050 +052	+053 +052	+053 +052
+047	+046 +044	+042 +040	+040 +040	+042 +043	+044 +046	+048 +048	+049 +049	+049 +049	+049 +049	+051 +050	+049 +049
+048	+047 +045	+042 +041	+041 +041	+045 +045	+046 +046	+049 +051	+052 +052	+054 +056	+057 +056	+053 +055	+054 +052
+049	+044 +044	+039 +039	+039 +043	+046 +046	+048 +048	+054 +054	+056 +056	+056 +056	+057 +057	+058 +058	+057 +056
+044	+041 +041	+037 +037	+037 +035	+042 +045	+045 +053	+055 +055	+056 +056	+057 +057	+059 +061	+062 +062	+062 +062
+045	+039 +035	+036 +036	+033 +036	+041 +044	+048 +053	+055 +057	+057 +059	+061 +062	+061 +062	+062 +062	+064 +064
+037	+034 +030	+030 +028	+033 +033	+038 +042	+047 +052	+055 +056	+056 +058	+060 +062	+063 +063	+063 +063	+064 +062
+000	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
+000	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

230273

230273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
298	299 297	300 299	293 295	293 287	285 285	283 283	271 272	276 276	279 274	281 287	287 287
U 80	295 296	294 296	296 291	288 281	278 279	278 278	266 267	269 270	271 275	285 283	282 284
U 10	297 297	294 296	275 271	287 278	275 276	277 263	266 270	272 272	270 273	286 282	283 285
F200	146 147	151 159	151 147	143 143	140 142	134 134	157 148	147 130	139 145	145 157	152 163
F160Z0	xxx 2xx										
F120Z0	xxx 2xx										
F 80	131 127	128 135	123 117	112 111	109 110	110 127	123 119	119 114	114 119	119 139	128 142
F 40Z0	xxx 2xx										
F 20Z0	xxx 2xx										
F 10	096 089	093 090	091 081	073 066	056 062	062 064	058 087	086 072	075 082	088 098	096 097
F 2	xxx 2xx										
F200	+045 +044	+039 +039	+040 +040	+043 +043	+043 +043	+043 +043	+042 +042	+040 +038	+035 +035	+027 +027	+026 +025
F 160	+040 +048	+043 +043	+042 +043	+043 +043	+044 +044	+046 +046	+048 +048	+049 +049	+049 +049	+049 +049	+049 +049
F 120	+053 +052	+051 +046	+045 +045	+045 +045	+044 +044	+044 +044	+041 +041	+043 +043	+032 +032	+027 +027	+029 +028
F 80	+057 +054	+054 +049	+048 +047	+047 +046	+046 +046	+045 +045	+044 +044	+043 +043	+032 +032	+031 +031	+030 +030
F 40	+060 +058	+057 +052	+049 +048	+048 +046	+046 +045	+045 +045	+046 +046	+046 +046	+036 +036	+034 +034	+033 +033
F 20	+061 +059	+058 +052	+049 +047	+047 +044	+044 +044	+045 +045	+044 +044	+047 +047	+039 +039	+036 +036	+039 +039
F 9	+062 +059	+058 +052	+049 +047	+047 +044	+044 +044	+045 +045	+044 +044	+047 +047	+039 +039	+036 +036	+038 +038
F 2	+061 +058	+057 +050	+047 +043	+043 +043	+039 +038	+038 +040	+040 +045	+037 +037	+034 +038	+032 +037	+039 +036

230273

230273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
296	291 286	287 288	286 287	288 287	286 284	282 282	281 281	280 278	278 277	275 275	275 275
291	247 287	281 281	282 281	282 283	281 281	280 281	278 278	278 277	275 274	273 272	273 275
289	286 281	281 279	282 282	282 283	283 281	279 279	280 280	278 277	275 274	273 274	276 278
152	151 145	155 152									

230273												240273			CABA UW									
GAT	12-16	16-17	17-18 <sup>a</sup>	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
DZDU	291	283	267	269	273	270	271	270	274	280	283	292	302	329	320	312	312	313	308	312	306	299	297	288
DHU	292	280	258	263	265	263	266	265	268	270	270	285	300	332	322	306	305	299	286	305	303	292	280	278
D 10	293	280	255	264	263	259	263	261	267	268	265	281	299	332	321	305	304	293	277	296	302	293	288	283
FZDU	127	120	120	152	131	131	130	127	134	123	115	132	148	141	135	127	106	115	119	127	123	130	138	137
F160ZJ	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F120ZD	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F 80	060	084	095	125	108	099	101	092	108	097	088	105	125	117	106	101	087	090	081	104	096	101	105	099
F 40ZD	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F 20ZD	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F 10	050	048	061	081	072	065	063	054	069	059	050	067	082	085	076	068	061	056	044	071	057	059	075	067
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
T200	+002	+004	+006	+008	+007	+011	+011	+004	+005	+009	+017	+020	+016	-011	-013	-012	-011	-003	+002	-005	-001	-000	-006	-007
T160	+002	+005	+007	+010	+006	+005	+014	+015	+015	+015	+020	+024	+020	-008	-010	-010	-008	-002	+001	-002	+002	+002	-004	-007
T120	+002	+005	+009	+013	+008	+007	+011	+018	+018	+018	+022	+027	+023	-005	-007	-007	-005	-002	+001	+001	+002	+002	+002	-007
T 80	+002	+007	+011	+015	+015	+018	+023	+021	+020	+020	+023	+029	+025	-002	-004	-004	-004	-002	+001	+001	+004	+005	+002	-006
T 40	+002	+003	+012	+017	+017	+020	+023	+022	+021	+023	+031	+027	+002	-001	-002	-001	-001	-001	+002	+002	+006	+007	+001	-004
T 20	+003	+008	+013	+018	+020	+021	+025	+022	+023	+022	+024	+031	+027	+003	+000	-000	+002	+000	+001	+005	+006	+008	+003	-002
T 9	+003	+008	+012	+016	+012	+017	+025	+021	+023	+021	+023	+030	+027	+004	+001	-000	+003	+000	+002	+005	+004	+008	+004	-001
T 2	+003	+007	+011	+015	+011	+010	+017	+018	+021	+019	+022	+028	+024	+004	+001	+001	+003	+000	-003	+004	+004	+004	+004	-001
* * * * *																								
C1200	-000	-001	-001	-001	-001	-001	-004	-009	-007	-005	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CF 20	+000	+000	-000	+001	+003	-002	-000	-000	+000	+000	+000	+000	-000	+000	+000	+000	+000	-000	-000	+000	+000	+000	+000	-000

250273															250273											
03-04		04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15				
344	344	342	348	340	314	310	295	267	251	250	228	219	204	182	192	144	138	129	147	152	137	131	119	D 200		
327	332	332	339	298	289	299	284	270	259	241	223	203	194	188	192	149	125	124	158	162	153	144	130	D 80		
291	281	261	247	236	253	274	266	256	253	264	184	177	182	160	187	151	169	116	157	164	154	143	132	D 10		
071	072	064	051	040	037	051	043	039	027	026	021	016	018	014	021	015	021	022	024	029	024	024	018	F 200		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
058	053	046	034	026	033	056	044	054	034	022	024	020	025	013	022	015	021	023	023	029	025	023	016	F 100		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
025	019	010	011	023	019	027	024	026	011	009	012	016	020	013	019	015	016	021	023	027	025	022	015	F 10		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
*004	+010	+021	+029	+029	+022	+017	+005	+006	+007	+005	+006	+005	+003	-000	-004	-005	-006	-004	-002	-001	+000	+001	+004	T 200		
-000	+002	+014	+013	+011	+004	+009	+002	+001	+000	+002	+009	+007	+004	+001	-003	-003	-003	-003	-001	+001	+003	+004	+009	+015	T 100	
+012	+012	+023	+019	+014	+019	+011	+002	+004	+003	+002	+008	+003	-001	-001	-002	-001	-001	-003	+003	+004	+009	+010	+015	T 160		
-001	+010	+017	+017	+012	+016	+011	+003	+004	+005	+001	+003	+000	-000	+000	+001	+001	+002	+004	+005	+008	+009	+010	+021	T 120		
+006	+002	+011	+021	+021	+026	+019	+005	+001	+002	+001	+003	+002	+003	+003	+003	+004	+004	+005	+005	+007	+009	+013	+021	+027	T 80	
-002	-007	-002	+009	+011	+014	+011	+003	+003	+003	+002	+002	+003	+004	+004	+004	+005	+005	+006	+012	+012	+020	+024	+025	+030	T 40	
-006	-012	-014	-012	-002	-000	+001	+007	+001	+002	+002	+001	+003	+004	+004	+004	+005	+005	+006	+008	+011	+012	+014	+016	+026	+031	T 20
-020	-027	-027	-023	-019	-022	-022	+011	-003	+001	+003	+002	+003	+005	+006	+006	+007	+009	+014	+021	+022	+027	+029	+030	+033	T 9	
*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*		
+001	-003	+024	+032	+016	+009	+011	+005	+008	+011	+006	+006	+004	+002	-000	-001	-001	-001	-001	-001	-001	-001	-000	-000	-000	C 200	
-000	-005	+005	+014	+014	+010	+009	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+002	+002	+000	+000	+000	+000	T 2	

250273

WAT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW											
D200	101	106	092	086	065	053	019	349	052	056	061	061	066	075	080	082	075	064	067	068	072	069	070	075
D 80	127	141	120	119	100	196	303	341	061	061	069	072	076	076	077	075	074	070	074	088	085	090	090	109
D 10	134	157	109	159	181	237	317	313	038	053	086	080	080	082	084	049	023	030	023	017	318	334	250	165
F200	013	012	011	013	013	008	028	044	051	060	060	058	059	057	053	047	042	036	031	027	021	021	018	020
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	114	012	012	008	006	003	010	030	042	037	036	035	038	042	046	047	046	038	033	028	020	016	011	013
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	013	009	011	005	005	009	012	014	016	014	013	015	016	013	013	019	014	009	009	008	012	007	002	002
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F200	+008	+014	+015	+015	+016	+014	+015	+015	+014	+015	+013	+013	+013	+013	+014	+013	+013	+013	+013	+013	+013	+013	+012	
T160	+016	+018	+019	+019	+018	+018	+018	+018	+017	+016	+016	+016	+016	+017	+017	+016	+015	+015	+015	+017	+016	+016	+016	
T120	+020	+022	+023	+022	+021	+020	+020	+021	+019	+017	+015	+014	+014	+018	+019	+019	+017	+017	+017	+019	+018	+017	+018	
T 80	+023	+025	+027	+026	+024	+023	+023	+022	+024	+022	+018	+014	+012	+011	+014	+015	+016	+017	+017	+017	+019	+018	+018	
T 40	+027	+029	+030	+029	+027	+024	+022	+023	+023	+024	+019	+014	+014	+012	+012	+010	+007	+009	+009	+008	+016	+013	+018	
T 20	+029	+030	+032	+031	+028	+024	+021	+020	+017	+021	+016	+016	+010	+007	+006	+006	+002	+001	+001	+001	+010	+007	+014	+003
T 9	+029	+031	+034	+031	+028	+020	+018	+015	+011	+010	+009	+009	+007	+007	+003	+003	+001	+003	+003	+008	+011	+022	+017	+016
T 2	+027	+031	+033	+027	+021	+009	+007	+002	+002	+002	+015	+009	+004	+005	+008	+020	+023	+021	+033	+037	+041	+041	+046	+041
CT200	-004	+004	+008	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+000	+000	+000	+000
CT 20	+000	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001

260273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	260273												
U/1	054	004	342	333	332	323	323	320	316	313	313	314	316	329	323	318	316	360	328	317	341	D 200		
U/7	078	262	295	299	301	297	301	298	295	298	300	301	313	310	322	326	315	311	003	326	289	342	D 80	
U/6	336	297	285	275	260	265	276	242	230	241	261	273	301	313	310	317	330	313	360	309	276	338	D 10	
U/2	011	012	016	020	020	021	J23	024	023	025	037	039	050	059	057	041	041	057	062	088	052	058	067	F200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0												
012	004	008	013	021	022	026	026	028	031	033	041	041	039	049	050	037	039	061	065	069	035	038	055	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
U/4	004	008	010	011	009	009	014	011	018	026	033	040	042	035	034	051	057	045	018	030	038	F 10	F 20Z0	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2												
+U12	+U10	+009	+010	+010	+011	+011	+011	+014	+013	+013	+017	+017	+015	+013	+013	+013	+021	+024	+024	+018	+004	+003	+004	+018
+U15	+U13	+C12	+012	+012	+013	+012	+012	+012	+015	+015	+019	+016	+017	+019	+025	+028	+028	+021	+006	+008	+007	+008	+008	T 200
+U18	+U16	+F13	+014	+014	+013	+013	+013	+013	+015	+015	+017	+020	+017	+020	+022	+029	+032	+031	+024	+007	+020	+025	+025	T 160
+U17	+U14	+009	+013	+013	+014	+014	+014	+014	+016	+015	+017	+018	+019	+019	+023	+036	+034	+036	+027	+009	+021	+022	+027	T 120
+U06	+U01	-002	+003	+002	+007	+006	+005	+008	+007	+006	+015	+023	+027	+029	+037	+041	+039	+032	+013	+023	+025	+031	+031	T 80
-U05	-010	-112	-007	-013	-008	-011	-013	-017	-014	-010	-002	-014	-010	-016	-016	-016	-017	-017	-017	-017	-017	-017	-017	T 40
-U18	-U25	-029	-029	-030	-027	-026	-025	-025	-021	-016	-002	-015	-025	-030	-032	-039	-043	-042	-034	+015	+023	+027	+033	T 20
-U44	-U43	-C51	-046	-053	-047	-050	-038	-034	-027	-017	-002	-017	-029	-032	-038	-044	-050	-048	+039	+019	+023	+030	+038	T 2
*000	-U01	-U00	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT200
-U00	-U01	-U01	+001	+001	+001	+001	+001	+001	+001	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20

260273

WAT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	260273											
D200	324	009	011	004	357	359	360	005	018	034	044	045	052	064	075	075	076	084	085	084	087	094	103	
D 80	332	013	018	357	356	353	004	013	024	037	045	046	052	057	064	071	078	086	087	088	088	101	109	
D 10	343	016	001	321	324	317	310	332	350	005	002	360	334	007	034	050	059	047	009	016	032	038	038	
F200	056	050	066	070	066	060	063	065	066	072	065	063	064	063	060	063	063	057	052	050	043	034	030	017
F160Z0	yyy	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	049	054	058	047	043	050	053	058	062	056	052	049	046	055	060	059	056	051	048	039	037	034	020	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	034	043	013	016	020	015	020	015	013	017	014	015	014	012	015	014	012	015	013	014	016	014	013	F 20Z

220273

270273

280373

SARAH

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABADW									
D 200	317	313	313	304	294	259	287	294	294	295	294	291	286	281	279	276	279	279	280	277	272	261
D 80	319	312	308	301	292	287	281	277	276	271	271	271	274	274	264	263	262	265	266	267	265	257
D 1U	322	313	306	296	281	284	272	266	267	266	263	264	264	258	231	225	235	247	251	260	251	221
F 200	050	047	040	048	054	064	066	068	066	072	062	059	048	047	041	045	058	072	084	091	092	088
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	052	046	052	048	054	064	071	062	072	080	082	078	076	073	066	065	062	068	079	080	081	070
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	043	038	034	025	027	029	030	027	034	034	036	034	036	032	024	025	027	034	031	031	028	025
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+022	+022	+022	+022	+021	+021	+020	+019	+020	+021	+021	+022	+023	+023	+023	+023	+023	+022	+021	+020	+019	+020
T160	+026	+026	+025	+025	+024	+023	+022	+022	+022	+022	+024	+024	+026	+026	+026	+026	+026	+025	+025	+025	+024	+024
T120	+030	+029	+029	+029	+028	+027	+025	+025	+024	+025	+024	+025	+028	+028	+028	+028	+028	+027	+024	+023	+023	+023
T 80	+034	+033	+032	+033	+032	+030	+028	+026	+027	+027	+025	+025	+027	+027	+029	+025	+025	+023	+023	+024	+022	+024
T 40	+038	+037	+034	+035	+032	+029	+024	+023	+022	+020	+019	+022	+024	+024	+022	+024	+022	+017	+011	+012	+011	+022
T 20	+040	+039	+033	+032	+029	+023	+020	+017	+016	+014	+013	+014	+016	+016	+016	+016	+016	+012	+008	+003	+007	+005
T 9	+041	+039	+032	+029	+026	+019	+015	+013	+012	+011	+009	+010	+012	+010	+002	+002	+002	-009	-001	-004	+003	+001
T 2	+043	+039	+028	+022	+011	+007	+002	+004	+001	+000	-001	-000	+001	-004	-016	-023	-031	-027	-024	-015	-019	-021
C1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
Cr 20	-000	-000	+000	+000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	+000	-000

280273

280273

03-04	14-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15														
256	251	246	243	248	246	243	244	246	242	238	232	230	232	230	231	xxx	230	xxx	xxx	xxx	xxx	xxx	D 200		
243	244	239	232	231	227	225	221	220	222	217	213	215	217	221	222	225	xxx	224	xxx	xxx	xxx	xxx	xxx	D 80	
226	222	221	215	217	218	210	202	208	213	209	208	211	215	222	226	230	xxx	228	xxx	xxx	xxx	xxx	xxx	D 10	
088	084	091	098	099	110	104	104	108	115	116	121	126	119	115	119	116	xxx	103	xxx	xxx	xxx	xxx	xxx	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z												
064	065	061	078	043	076	084	084	086	085	082	084	084	080	092	096	103	xxx	095	xxx	xxx	xxx	xxx	xxx	F120Z	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80												
036	037	037	026	026	025	032	037	039	041	044	050	050	054	052	075	084	xxx	061	xxx	xxx	xxx	xxx	xxx	F 40Z	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10												
018	+019	+019	+018	+017	+014	+014	+014	+014	+015	+015	+015	+015	+005	+003	+003	+003	+006	+008	xxx	+011	xxx	xxx	xxx	xxx	F 2
020	+020	+021	+021	+018	+011	+012	+014	+013	+011	+009	+005	+003	+004	+006	+006	+009	+012	+015	+015	xxx	xxx	xxx	xxx	xxx	T 200
023	+023	+022	+018	+016	+008	+008	+010	+006	+006	+006	+002	+013	+004	+006	+010	+013	+015	+019	xxx	xxx	xxx	xxx	xxx	T 160	
015	+018	+015	+011	+011	+004	+004	+005	+003	+000	+001	+003	+005	+008	+013	+016	+019	xxx	+023	xxx	xxx	xxx	xxx	xxx	T 120	
004	+038	+007	+002	+002	+001	+001	+004	+007	+004	+004	+001	+004	+006	+011	+017	+020	+023	+027	xxx	xxx	xxx	xxx	xxx	T 80	
002	-002	-001	-003	-004	-008	-008	-009	-009	-005	-000	+005	+007	+013	+019	+023	-025	xxx	+029	xxx	xxx	xxx	xxx	xxx	T 40	
009	-009	-006	-007	-010	-012	-011	-012	-011	-005	-000	+005	+007	+013	+020	+023	+026	+030	xxx	xxx	xxx	xxx	xxx	xxx	T 20	
020	-015	-012	-016	-021	-021	-019	-017	-013	-006	-000	+004	+007	+014	+021	+025	+028	xxx	+032	xxx	xxx	xxx	xxx	xxx	T 9	
000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	xxx	xxx	xxx	xxx	xxx	T ?	
000	-001	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	xxx	xxx	xxx	xxx	xxx	CT 200	
000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	xxx	xxx	xxx	xxx	xxx	CT 20	

280273

11263

010373

010373

020373

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	xxx 224	221 222	219 219	220 222	224 226	243 244	237 236	223 223	226 229	243 243	233 232	236 239
D 80	xxx 219	216 213	212 211	213 215	216 218	239 242	230 232	219 216	215 215	234 240	229 225	231 229
D 10	xxx 221	219 213	211 210	211 211	214 219	242 247	230 235	221 219	215 215	235 243	233 229	233 231
F 200	xxx 088	090 088	097 103	106 109	118 112	119 109	106 112	111 109	111 111	110 114	123 121	117 111
F160Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F120Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 80	xxx 071	074 073	077 076	077 077	083 080	098 091	093 103	086 086	084 085	085 085	092 103	100 096
F 40Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 20Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 10	xxx 048	047 045	043 040	042 042	046 046	069 067	079 061	058 056	056 063	070 080	077 075	062 062
F 2	yyy xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
T 200	xxx +047	+048 +048	+048 +047	+046 +045	+045 +043	+037 +034	+029 +018	+010 +009	+010 +007	+011 +011	+010 +009	+006 +007
T160	xxx +051	+051 +051	+051 +050	+049 +048	+047 +046	+041 +037	+032 +025	+025 +014	+012 +009	+013 +013	+012 +012	+009 +010
T120	xxx +055	+055 +054	+054 +053	+051 +050	+049 +048	+044 +040	+036 +030	+014 +014	+015 +011	+016 +016	+014 +014	+012 +013
T 80	xxx +058	+058 +057	+057 +055	+053 +052	+051 +050	+047 +043	+040 +029	+016 +017	+017 +017	+018 +019	+018 +018	+015 +015
T 40	xxx +061	+061 +060	+058 +056	+056 +055	+052 +052	+051 +049	+046 +043	+038 +019	+020 +017	+021 +021	+020 +020	+017 +017
T 20	xxx +062	+062 +060	+058 +055	+054 +054	+052 +051	+050 +047	+043 +038	+020 +020	+021 +021	+018 +022	+022 +021	+018 +019
T 9	xxx +063	+062 +060	+057 +055	+054 +054	+051 +051	+050 +047	+043 +039	+021 +021	+021 +021	+018 +023	+022 +022	+019 +019
T 2	xxx +062	+061 +058	+055 +053	+051 +049	+048 +045	+042 +042	+038 +028	+021 +021	+022 +022	+018 +023	+023 +023	+019 +019
CT200	xxx -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	xxx -000	+000 -000	-000 -000	-000 -000	+000 -000	-000 -000	+000 -000	+000 -000	+000 -000	-000 -000	+000 -000	+000 -000

020373

020373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
257 243	293 313	316 317	316 320	326 331	320 320	316 316	xxx xxx				
235 245	264 304	313 312	314 316	324 331	320 319	316 316	xxx xxx				
232 251	249 299	313 310	314 314	323 330	321 318	316 316	xxx xxx				
109 103	111 128	130 127	136 137	141 135	128 140	131 131	xxx xxx				
xxx xxx											
xxx xxx											
053 082	079 097	102 099	107 106	113 116	101 116	105 105	xxx xxx				
xxx xxx											
xxx xxx											
054 050	047 066	069 075	076 080	080 086	076 076	xxx xxx					
xxx xxx											
+019 +031	+035 +035	+034 +034	+032 +031	+029 +027	+028 +027	+029	xxx xxx				
+019 +031	+036 +036	+036 +036	+035 +031	+033 +031	+031 +030	+032	xxx xxx				
+019 +030	+037 +040	+039 +040	+039 +037	+034 +032	+033 +032	+034	xxx xxx				
+020 +028	+036 +042	+041 +047	+042 +038	+036 +035	+036 +035	+037	xxx xxx				
+022 +027	+036 +044	+044 +044	+042 +045	+042 +039	+038 +038	+040	xxx xxx				
+023 +027	+036 +044	+044 +044	+048 +047	+043 +040	+039 +039	+042	xxx xxx				
+023 +027	+036 +045	+045 +045	+049 +045	+041 +041	+039 +039	+042	xxx xxx				
+023 +027	+035 +045	+045 +045	+043 +041	+042 +041	+040 +040	+041	+044	+021 +021	+022 +022	+028 +028	+029 +029
-000 -000	-000 -000	-000 -000	+000 +001	+001 +001	-000 -000	+001	xxx xxx				
+000 +000	+000 +000	-000 -004	-003 -003	-001 +002	-000 +000	+001 -000	+000	xxx xxx	xxx xxx	xxx xxx	xxx xxx
CT200	-000 -000	-001 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 +000	-000 -000	-000 +000	-000 -000	-000 -000	-000 -000	-000 +000	-000 +000

020373

020373

030373

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	309 304	302 294	291 283	276 276	272 268	261 254	256 256	255 250	254 254	249 249	250 250	242 239
D 80	308 302	294 287	282 274	263 258	251 245	241 236	236 231	229 226	227 222	222 220	218 219	220 217
D 10	310 303	299 294	294 283	273 262	273 227	223 225	225 219	212 216	216 219	222 217	208 209	207 209
F 200	081 083	084 070	068 065	065 072	074 079	086 083	077 091	100 109	113 119	124 124	130 129	125 123
F160Z0	xxx xxx											
F120Z0	xxx xxx											
F 80	079 074	076 064	062 058	060 064	064 064	071 080	073 079	086 085	090 090	085 085	080 078	072 075
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	060 056	051 034	033 029	029 024	025 030	035 036	033 028	031 031	028 028	035 035	036 037	032 033
F 2	xxx xxx											
T 200	+043 +042	+041 +040	+038 +036	+036 +037	+037 +037	+040 +041	+041 +043	+049 +051	+053 +053	+052 +054	+054 +049	+055 +038
T160	+047 +046	+045 +045	+043 +041	+040 +039	+039 +040	+040 +042	+043 +045	+045 +049	+050 +050	+052 +052	+054 +047	+055 +037
T120	+050 +056	+048 +047	+045 +043	+043 +043	+043 +044	+046 +046	+046 +046	+040 +040	+042 +042	+042 +042	+043 +038	+040 +036
T 80	+054 +055	+055 +051	+049 +047	+047 +047	+045 +045	+044 +044	+044 +044	+042 +042	+042 +042	+042 +042	+038 +036	+036 +035
T 40	+058 +057	+055 +051	+049 +047	+047 +047	+043 +043	+038 +038	+041 +041	+040 +040	+036 +036	+036 +036	+033 +033	+032 +035
T 20	+060 +059	+056 +051	+046 +043	+043 +043	+039 +035	+035 +035	+026 +026	+027 +027	+024 +024	+024 +024	+024 +024	+026 +026
T 9	+061 +060	+059 +049	+044 +039	+039 +039	+035 +035	+035 +035	+026 +026	+027 +027	+024 +024	+024 +024	+026 +026	+029 +031
T 2	+062 +060	+054 +045	+045 +036	+026 +020	+012 +015	+008 +009	+015 +016	+010 +010	+009 +013	+008 +014	+016 +016	+020 +022
CT200	-000 -000	-001 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 +000	-000 -000	-000 +000	-000 -000	-000 -000	-000 -000	-000 +000	-000 +000	-000 +000

030373

030373

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
238 239	239 242	244 243	239 241	240 243	246 247	245 247	249 248	250 250	247 248	249 249	250 250	

030373

030373

040373

CABA IIW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	258	259	257	257	263	262	261	263	262	264	263	264
D 80	248	249	245	243	246	244	242	246	249	251	254	255
D 10	247	250	244	241	245	238	239	246	248	252	254	256
F 200	124	118	117	114	111	095	097	110	107	120	123	124
F 160Z0	XXX											
F 120Z0	XXX											
F 80	095	088	083	081	079	065	073	084	076	074	085	085
F 40Z0	XXX											
F 20Z0	XXX											
F 10	068	066	058	056	052	037	044	056	050	049	055	057
F 2	XXX											
T 200	+067	+061	+059	+060	+062	+062	+060	+064	+067	+067	+065	+066
T 160	+071	-064	+061	+062	+063	+064	+061	+059	+063	+065	+067	+066
T 120	+074	+068	+064	+064	+065	+065	+062	+060	+068	+070	+069	+068
T 80	+077	+070	+066	+066	+067	+067	+067	+069	+073	+073	+071	+070
T 40	+080	+074	+068	+068	+068	+068	+066	+064	+070	+076	+074	+072
T 20	+081	+076	+069	+069	+069	+069	+066	+064	+071	+077	+075	+074
T 9	+081	+077	+070	+069	+069	+069	+066	+064	+069	+076	+076	+072
T 2	+081	+077	+072	+069	+070	+069	+066	+064	+069	+070	+071	+073
C 2T00	*	*	*	*	*	*	*	*	*	*	*	*
C 2T	-001	+000	-000	-000	-000	-000	-003	+002	+005	+000	-000	-000
C 2T	+000	+001	+000	-000	-000	-000	-004	-012	-005	+000	+000	-000

040373

040373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
51 243	241 241	237 240	240 237	230 227	228 229	230 228	233 233	232 231	229 233	232 235	235 240
35 229	232 227	226 229	230 228	219 217	217 221	222 222	227 227	226 227	224 227	227 233	D 200
35 228	233 227	227 230	231 231	220 218	219 223	224 225	229 229	229 229	230 230	235 233	D 80
98 096	111 108	108 115	117 112	104 108	107 109	103 105	107 108	099 099	095 100	094 101	097 105
xx xxx	xxx xxxx	xxx xxx	F200								
xx xxx	xxx xxxx	xxx xxx	F1602								
70 074	079 076	080 084	083 078	074 082	087 091	086 090	093 093	088 089	087 089	085 085	085 080
xx xxx	xxx xxxx	xxx xxx	F 80								
xx xxx	xxx xxxx	xxx xxx	F 402								
48 050	054 049	051 057	057 051	049 055	061 070	074 073	075 080	072 073	072 072	067 066	067 067
xx xxx	xxx xxxx	xxx xxx	F 202								
xx xxx	xxx xxxx	xxx xxx	F 2								
00 +058	+057	+059	+058	+058	+057	+056	+055	+057	+060	+052	+065
61 060	+059	+061	+050	+060	+059	+058	+057	+057	+061	+056	+068
62 +062	+062	+063	+062	+061	+060	+062	+063	+061	+063	+063	+069
64 +063	+063	+064	+064	+064	+063	+063	+065	+067	+070	+072	+075
66 +065	+065	+066	+066	+065	+064	+066	+065	+066	+065	+071	+074
67 +065	+066	+067	+067	+066	+067	+069	+071	+071	+072	+075	+078
67 +066	+066	+067	+067	+068	+070	+070	+072	+072	+073	+076	+079
67 +067	+066	+067	+067	+066	+065	+065	+066	+067	+068	+070	+070
00 -000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
00 +000	+000	+000	+000	+000	-001	-001	-000	-000	-000	-000	-000

040373

040373

050373

SABAJW

050373

## 050373

## 050373

## 060373

## CABA UW

UMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	232	235	241	237	240	242	248	248	249	244	242	244
D 40	226	224	238	233	236	239	239	231	232	231	228	235
D 10	230	230	240	234	233	232	237	221	221	219	225	223
F 200	070	063	051	073	066	064	082	038	028	035	105	117
F 160Z0	xxx	119	121									
F 120Z0	xxx											
F 80	060	059	044	053	050	046	060	060	067	064	069	079
F 40Z0	xxx											
F 20Z0	xxx											
F 10	041	040	031	034	029	025	032	033	035	033	034	040
F 2	xxx											
F 200	+076	+075	+073	+073	+072	+071	+070	+070	+068	+066	+067	+069
T 160	+056	+079	+077	+076	+075	+074	+073	+071	+068	+070	+070	+070
T 120	+063	+082	+080	+079	+075	+072	+076	+074	+072	+071	+070	+069
T 80	+068	+066	+084	+082	+081	+080	+079	+076	+073	+072	+073	+071
T 40	+090	+089	+087	+085	+084	+082	+081	+078	+074	+073	+074	+070
T 20	+091	+090	+089	+086	+084	+082	+081	+077	+073	+073	+072	+068
T 2	+091	+090	+089	+086	+083	+050	+079	+076	+073	+072	+071	+067
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 20	-000	-000	-000	-000	-000	-000	-000	+000	+000	-000	-000	-000
	*	*	*	*	*	*	*	*	*	*	*	*
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 20	-000	-000	-000	-000	-000	-000	-000	+000	+000	-000	-000	-000
	*	*	*	*	*	*	*	*	*	*	*	*

## 060373

## 060373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
297	277	296	289	269	286	290	288	281	274	262	241
299	269	288	280	261	283	284	284	270	257	250	235
290	268	278	277	283	282	258	258	250	253	253	237
103	098	096	089	090	092	091	082	076	077	074	061
XXX											
XXX											
083	060	074	069	071	072	072	065	063	062	059	056
XXX											
XXX											
091	053	051	042	039	039	037	043	031	031	037	048
XXX											
+039	+040	+040	+040	+040	+039	+037	+034	+033	+033	+032	+034
+038	+042	+044	+043	+043	+040	+038	+037	+037	+036	+039	+041
+046	+046	+047	+047	+047	+046	+044	+041	+039	+039	+042	+045
+049	+049	+050	+050	+049	+048	+047	+043	+041	+041	+042	+046
+023	+022	+052	+052	+050	+049	+043	+043	+041	+042	+046	+050
+023	+053	+053	+053	+053	+053	+053	+053	+053	+053	+053	+053
+024	+053	+053	+053	+053	+049	+047	+047	+041	+039	+044	+049
+023	+052	+052	+052	+052	+046	+046	+046	+050	+053	+053	+053
*	*	*	*	*	*	*	*	*	*	*	*
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	+000	+000	+000	+000

## 060373

## 060373

## 070373

## CABA UW

03-04	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
297	236	274	283	295	282	261	270	288	309	313	315	315
299	279	275	278	271	253	236	232	259	301	307	307	307
290	271	276	240	251	215	224	224	243	288	297	301	300
F 200	002	081	050	050	066	064	066	082	093	091	101	115
F 160Z0	xxx											
F 120Z0	xxx											
F 80	060	074	074	061	033	026	041	043	047	065	069	072
F 40Z0	xxx											
F 20Z0	xxx											
F 10	060	057	044	022	013	026	028	029	038	040	035	044
F 2	xxx											
F 200	+030	+013	+009	+011	+011	+014	+017	+019	+023	+020	+027	+023
T 160	+033	+016	+011	+011	+013	+015	+019	+021	+025	+023	+029	+023
T 120	+036	+019	+014	+013	+014	+016	+023	+027	+025	+027	+032	+026
T 80	+036	+021	+017	+014	+016	+015	+018	+022	+024	+028	+034	+035
T 40	+040	+024	+020	+015	+016	+018	+019	+024	+025	+030	+028	+037
T 20	+042	+025	+021	+017	+017	+019	+021	+025	+030	+037	+035	+037
T 2	+044	+026	+022	+018	+018	+020	+022	+025	+027	+031	+029	+031
	*	*	*	*	*	*	*	*	*	*	*	*
C 1200	+001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 200	+001	-000	-000	-000	-000	-000	-000	+004	+006	-000	-000	-000
	*	*	*	*	*	*	*	*	*	*	*	*
C 1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 200	-000	-000	-000	-000	-000	-000	-000	+000	+000	-000	-000	-000

## 070373

## 070373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
337	337	339	337	336	337	332	329	329	327	330	329
335	333	337	333	335	334	329	328	324	324	330	329
330	327	334	330	332	328	314	318	318	322	325	331
143	134	144	138	137	127	133	116	120	112	101	107
XXX											
XXX											
106	099	108	102	104	090	098	082	086	084	088	091
XXX											
XXX											
061	059	059	053	057	044	044	034	037	047	058	078
XXX											
+032	+031	+032	+034	+032	+035	+036	+036	+038	+037	+039	+034
+035	+034	+037	+034	+036	+038	+039	+041	+040	+042	+043	+045
+037	+036	+038	+036	+036	+039	+040	+042	+042	+047	+048	+048
+039	+038	+037	+038	+036	+038	+039	+041	+043	+046	+050	+055
+039	+037	+037	+036	+030	+032	+039	+045	+051	+057	+052	+056
+039	+037	+034	+034	+033	+030	+029	+033	+045	+051	+057	+059
+038	+036	+033	+036	+030	+028	+029	+033	+045	+052	+058	+060
+035	+032	+030	+029	+033	+024	+022	+023	+030	+044	+059	+065
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	-000	-				

070373

070373

080373

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	340	339	340	340	341	345	338	335	327	325	317	319
D 80	340	339	340	342	339	333	336	333	329	321	319	308
D 10	337	337	340	341	330	315	313	310	305	296	283	276
F 200	103	092	096	095	091	089	083	075	076	075	075	069
F 160Z0	xxx											
F 120Z0	xxx											
F 80	091	085	088	083	077	067	063	061	064	066	065	063
F 40Z0	xxx											
F 20Z0	xxx											
F 10	066	063	062	052	040	034	029	025	021	020	019	027
F 2	xxx											
T 200	+047	+046	+045	+043	+042	+040	+039	+036	+036	+035	+036	+036
T 160	+051	+050	+049	+047	+045	+042	+041	+039	+039	+039	+040	+040
T 120	+055	+054	+053	+051	+048	+045	+043	+042	+042	+042	+043	+042
T 80	+058	+057	+056	+054	+050	+048	+045	+044	+044	+044	+044	+044
T 40	+061	+061	+059	+056	+050	+048	+045	+042	+039	+038	+040	+041
T 20	+063	+062	+060	+056	+049	+044	+039	+034	+031	+030	+029	+030
T 9	+063	+063	+061	+056	+048	+041	+033	+029	+026	+025	+025	+023
T 2	+063	+063	+060	+053	+042	+030	+021	+018	+015	+015	+012	+013
C 200	-000	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

080373

080373

080373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
297	294	300	304	311	315	318	320	319	315	315	313
276	275	276	272	280	280	293	297	293	300	305	306
201	254	262	257	267	271	262	271	268	271	291	300
085	087	098	083	083	079	081	080	072	068	072	059
xxx											
xxx											
070	070	079	080	071	068	059	058	057	057	049	043
xxx											
033	034	042	045	035	029	025	027	029	029	032	038
xxx											
+045	+047	+049	+054	+055	+055	+055	+058	+063	+057	+051	+055
+047	+048	+050	+052	+052	+051	+053	+062	+056	+050	+053	+055
+049	+049	+051	+053	+052	+051	+051	+055	+055	+053	+053	+059
+050	+050	+052	+052	+050	+050	+050	+050	+053	+053	+054	+057
+048	+048	+048	+048	+048	+048	+048	+048	+048	+048	+048	+048
+043	+043	+046	+047	+045	+045	+046	+046	+046	+046	+046	+046
+041	+041	+044	+047	+045	+045	+046	+046	+046	+046	+046	+046
+043	+043	+046	+046	+045	+045	+046	+046	+046	+046	+046	+046
+044	+044	+044	+044	+044	+044	+044	+044	+044	+044	+044	+044
+045	+045	+045	+045	+045	+045	+045	+045	+045	+045	+045	+045
+046	+046	+046	+046	+046	+046	+046	+046	+046	+046	+046	+046
+047	+047	+047	+047	+047	+047	+047	+047	+047	+047	+047	+047
+048	+048	+048	+048	+048	+048	+048	+048	+048	+048	+048	+048
+049	+049	+049	+049	+049	+049	+049	+049	+049	+049	+049	+049
+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050
+051	+051	+051	+051	+051	+051	+051	+051	+051	+051	+051	+051
+052	+052	+052	+052	+052	+052	+052	+052	+052	+052	+052	+052
+053	+053	+053	+053	+053	+053	+053	+053	+053	+053	+053	+053
+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054
+055	+055	+055	+055	+055	+055	+055	+055	+055	+055	+055	+055
+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056
+057	+057	+057	+057	+057	+057	+057	+057	+057	+057	+057	+057
+058	+058	+058	+058	+058	+058	+058	+058	+058	+058	+058	+058
+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059
+060	+060	+060	+060	+060	+060	+060	+060	+060	+060	+060	+060
+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061
+062	+062	+062	+062	+062	+062	+062	+062	+062	+062	+062	+062
+063	+063	+063	+063	+063	+063	+063	+063	+063	+063	+063	+063
+064	+064	+064	+064	+064	+064	+064	+064	+064	+064	+064	+064
+065	+065	+065	+065	+065	+065	+065	+065	+065	+065	+065	+065
+066	+066	+066	+066	+066	+066	+066	+066	+066	+066	+066	+066
+067	+067	+067	+067	+067	+067	+067	+067	+067	+067	+067	+067
+068	+068	+068	+068	+068	+068	+068	+068	+068	+068	+068	+068
+069	+069	+069	+069	+069	+069	+069	+069	+069	+069	+069	+069
+070	+070	+070	+070	+070	+070	+070	+070	+070	+070	+070	+070
+071	+071	+071	+071	+071	+071	+071	+071	+071	+071	+071	+071
+072	+072	+072	+072	+072	+072	+072	+072	+072	+072	+072	+072
+073	+073	+073	+073	+073	+073	+073	+073	+073	+073	+073	+073
+074	+074	+074	+074	+074	+074	+074	+074	+074	+074	+074	+074
+075	+075	+075	+075	+075	+075	+075	+075	+075	+075	+075	+075
+076	+076	+076	+076	+076	+076	+076	+076	+076	+076	+076	+076
+077	+077	+077	+077	+077	+077	+077	+077	+077	+077	+077	+077
+078	+078	+078	+078	+078	+078	+078	+078	+078	+078	+078	+078
+079	+079	+079	+079	+079	+079	+079	+079	+079	+079	+079	+079
+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080	+080
+081	+081	+081	+081	+081	+081	+081	+081	+081	+081	+081	+081
+082	+082	+082	+082	+082	+082	+082	+082	+082	+082	+082	+082
+083	+083	+083	+083	+083	+083	+083	+083	+083	+083	+083	+083
+084	+084	+084	+084	+084	+084	+084	+084	+084	+084	+084	+084
+085	+085	+085	+085	+085	+085	+085	+085	+085	+085	+085	+085
+086	+086	+086	+086	+086	+086	+086	+086	+086	+086	+086	+086
+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087
+088	+088	+088	+088	+088	+088	+088	+088	+088	+088	+088	+088
+089	+089	+089	+089	+089	+089	+089	+089	+089	+089	+089	+089
+090	+090	+090	+090	+090	+090	+090	+090	+090	+090	+090	+090
+091	+091	+091	+091	+091	+091	+091	+091	+091	+091	+091	+091
+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092
+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093
+094	+094	+094	+094	+094	+094	+094	+094	+094	+094	+094	+094
+095	+095	+095	+095	+095	+095	+095	+095	+095	+095	+095	+095
+096	+096	+096	+096	+096	+096	+096	+096	+096	+096	+096	+096
+097	+097	+097	+097	+097	+097	+097	+097	+097	+097	+097	+097
+098	+098	+098	+098	+098	+098	+098	+098	+098	+098	+098	+098
+099	+099	+099	+099	+099	+099	+099	+099	+099	+099	+099	+099
+100	+100	+100	+100	+100	+100	+100	+100	+100	+100	+100	+100

090373

090373

090373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15



<tbl\_r cells="12" ix="3" maxcspan="1" maxr

190373

690323

10033

S. A. HALL

100375

100373

100323

110373

110573

110323

1203-7

343

120573

130373

130 633

130373

130773

130373

130373

149373

630

140572

140373

140373

140723

160323

159573

八九〇



170373												170373				180373				CAHAUW				
GMT	15-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03	
D20U	289	293	297	310	293	321	291	291	296	296	292	295	300	302	299	297	295	295	293	204	299	303	303	303
D 80	285	281	294	305	296	299	281	277	274	273	273	274	281	284	281	278	278	280	279	282	290	293	294	294
D 10	288	279	282	306	299	320	279	269	265	262	264	268	274	277	276	278	277	273	275	278	287	293	293	295
F200	059	061	054	063	070	024	091	093	111	115	116	112	109	114	115	117	116	118	118	126	134	135	129	
F1620Z	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F1220Z	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 80	054	047	046	056	065	075	069	073	078	080	078	073	075	082	086	086	086	086	086	085	093	106	102	097
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 10	039	034	032	039	041	049	036	034	036	040	040	036	036	044	048	048	049	051	053	049	056	065	067	063
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
T200	+059	+061	+062	+060	+057	+053	+053	+052	+056	+058	+054	+053	+053	+055	+056	+056	+057	+051	+042	+039	+051	+056	+056	
T160	+063	+064	+065	+063	+060	+055	+054	+054	+054	+056	+054	+053	+054	+055	+056	+056	+057	+057	+040	+039	+053	+058	+058	
T120	+066	+067	+069	+067	+062	+058	+057	+056	+055	+055	+053	+051	+054	+057	+057	+057	+062	+055	+043	+045	+056	+061	+061	
T 80	+070	+070	+072	+071	+065	+051	+060	+058	+054	+054	+053	+052	+053	+057	+058	+058	+056	+047	+043	+058	+063	+064	+064	
T 40	+074	+074	+076	+074	+068	+054	+061	+057	+052	+051	+051	+051	+053	+056	+058	+059	+064	+046	+033	+054	+065	+066	+065	
T 20	+075	+075	+077	+075	+069	+065	+059	+052	+049	+049	+050	+050	+052	+056	+058	+060	+063	+048	+034	+048	+061	+067	+067	
T 9	+076	+076	+078	+076	+069	+065	+065	+057	+049	+047	+049	+050	+050	+052	+056	+058	+060	+048	+034	+048	+061	+067	+067	
T 2	+076	+077	+078	+075	+068	+063	+052	+044	+043	+047	+048	+048	+051	+055	+058	+059	+064	+055	+044	+058	+064	+065	+066	
C1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-002	+002	-008	-003	-000	-000	
C1 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+007	+008	-014	-003	-000	-000	

190 573

190

20037

SABAUV

Q1T	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D_200	.006	.009	.014	.008	.011	.006	.346	.353	.342	.337	.330	.329
D_80	.011	.012	.025	.021	.022	.011	.341	.329	.332	.327	.319	.319
D_10	.006	.009	.020	.018	.005	.316	.321	.330	.319	.292	.304	.297
F_200	.042	.047	.030	.039	.031	.033	.030	.067	.072	.067	.070	.066
F_160ZJ	xxx											
F_120ZU	xxx											
F_80	.240	.044	.038	.032	.032	.030	.023	.061	.059	.068	.068	.066
F_40ZD	xxx											
F_20ZJ	xxx											
F_10	.033	.031	.028	.021	.017	.015	.017	.035	.018	.025	.014	.019
F_2	xxx											
T_200	+.051	+.050	+.049	+.049	+.048	+.047	+.048	+.046	+.046	+.045	+.045	+.046
T_160	+.055	+.054	+.053	+.052	+.051	+.051	+.051	+.048	+.048	+.046	+.045	+.048
T_120	+.059	+.059	+.057	+.056	+.055	+.054	+.054	+.051	+.049	+.049	+.049	+.052
T_80	+.063	+.062	+.061	+.059	+.059	+.058	+.057	+.054	+.048	+.046	+.047	+.055
T_40	+.067	+.066	+.065	+.063	+.062	+.061	+.059	+.055	+.046	+.043	+.037	+.044
T_20	+.069	+.068	+.067	+.065	+.063	+.061	+.059	+.054	+.044	+.038	+.031	+.032
T_9	+.073	+.069	+.068	+.065	+.063	+.059	+.055	+.052	+.042	+.034	+.029	+.027
T_2	+.071	+.070	+.068	+.065	+.061	+.052	+.041	+.046	+.034	+.024	+.022	+.016
C1200	-.000	-.000	-.000	-.000	-.000	-.000	-.000	-.000	-.000	-.000	-.000	-.000
C1_20	-.000	-.000	-.000	-.000	-.000	-.000	-.000	+.000	+.000	+.000	+.000	+.000

200575

300371

200 57

2007

310377

6830114

210373

210777

210373

210373

220373

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	xxx 239	231 236	236 231	216 202	205 207	204 193	189 192	196 193	195 194	194 197	197 203	206 207
D 80	xxx 236	230 233	244 233	221 199	194 193	180 190	190 193	187 190	184 183	183 184	184 180	187 196
D 10	xxx 238	233 232	237 237	209 180	164 153	146 152	152 155	161 160	167 166	170 170	181 176	187 193
F 200	xxx 045	042 041	041 036	030 028	031 039	047 049	049 045	052 057	066 078	079 080	084 084	084 083
F 160Z0	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx
F 120Z0	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx
F 80	xxx 044	038 023	016 015	019 019	023 029	037 044	044 041	056 073	083 093	091 097	095 095	078 069
F 40Z0	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx
F 20Z0	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx
F 10	xxx 036	028 027	015 013	009 009	012 015	016 018	018 018	020 021	027 032	033 028	027 031	023 018
F 2	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx
T 200	xxx +081	+081 +081	+081 +081	+081 +082	+083 +084	+084 +084	+084 +082	+082 +083	+081 +082	+083 +083	+082 +082	+084 +084
T 160	xxx +085	+085 +085	+085 +084	+084 +084	+084 +086	+086 +086	+086 +087	+086 +084	+085 +085	+085 +085	+084 +085	+085 +084
T 120	xxx +089	+089 +089	+089 +087	+087 +087	+088 +088	+087 +086	+086 +086	+085 +086	+087 +086	+086 +085	+084 +085	+085 +084
T 80	xxx +092	+092 +092	+091 +091	+090 +090	+089 +090	+090 +090	+090 +091	+090 +089	+087 +087	+086 +086	+085 +085	+083 +081
T 40	xxx +096	+096 +095	+093 +092	+092 +091	+089 +089	+087 +087	+087 +086	+085 +085	+082 +077	+072 +062	+056 +056	+051 +050
T 20	xxx +098	+097 +096	+093 +092	+089 +087	+086 +078	+073 +068	+068 +068	+069 +067	+064 +060	+053 +053	+045 +041	+040 +037
T 9	xxx +099	+098 +095	+092 +090	+084 +082	+082 +076	+071 +066	+060 +058	+058 +056	+057 +056	+055 +048	+040 +037	+038 +034
T 2	xxx +100	+097 +092	+082 +078	+069 +065	+059 +051	+043 +035	+035 +035	+032 +037	+038 +033	+028 +024	+025 +025	+024 +020
C 200	xxx -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	xxx -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

220373

220373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
208 217	221 225	233 233	231 232	233 229	224 222	226 226	212 206	206 206	210 223	229 214	207 216	200
202 209	215 215	219 221	218 215	217 216	216 212	211 211	210 201	206 200	210 216	230 214	201 216	200
199 186	174 182	175 175	171 170	165 174	169 180	202 210	220 208	208 208	200 218	222 240	231 191	224
087 084	079 077	079 079	072 069	065 060	058 057	054 054	041 041	042 039	036 032	026 021	021 020	020
xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	F 200						
xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	F 160Z0						
068 071	078 071	064 059	059 061	063 062	051 038	030 030	032 038	041 036	031 023	020 020	020 016	F 87
xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	F 40Z0						
U13 013	018 017	014 018	023 021	022 024	028 028	027 027	030 034	037 035	029 028	022 017	017 014	F 10
xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	xxx 0xx	F 2						
+084 +085	+085 +084	+084 +080	+081 +081	+081 +083	+084 +085	+085 +085	xxx +084	+087 +091	+094 +096	+098 +100	+103 +105	+106
+085 +085	+087 +085	+085 +082	+080 +078	+079 +081	+083 +086	+086 +078	xxx +084	+091 +096	+099 +101	+103 +105	+107 +109	+110
+078 +081	+085 +082	+081 +075	+075 +070	+074 +076	+075 +075	+067 +067	xxx +088	+097 +102	+105 +107	+108 +110	+112 +114	+116
+054 +055	+068 +064	+059 +056	+056 +057	+056 +057	+058 +056	+056 +057	xxx +089	+098 +103	+106 +108	+110 +112	+115 +117	+118
+033 +033	+036 +036	+036 +036	+040 +037	+032 +032	+034 +034	+058 +071	xxx +093	+103 +108	+111 +111	+112 +115	+117 +121	+122
+028 +027	+027 +023	+025 +025	+025 +023	+024 +024	+029 +043	+060 +073	xxx +096	+105 +123	+114 +114	+115 +118	+119 +121	+123
+025 +024	+024 +019	+017 +021	+021 +019	+019 +022	+030 +044	+061 +074	xxx +097	+107 +117	+116 +117	+117 +120	+121 +122	+125 +125
+008 +009	+014 +004	+000 +009	+009 +010	+010 +018	+031 +047	+064 +078	xxx +102	+112 +110	+122 +123	+125 +125	+126 +128	+127 +127
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	xxx -000	-000 +000	-000 -000	-000 -000	-000 -000	C 200
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	xxx +000	-000 +000	-000 -000	-000 -000	-000 -000	CT 20

230373

230373

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	207 222	222 222	221 221	220 213	155 156	136 135	134 138	148 146	166 192	204 203	205 203	202 202
D 80	200 213	224 215	215 215	199 046	002 019	031 053	056 058	089 136	179 197	208 208	200 200	196 196
D 10	204 212	212 238	244 222	090 016	018 037	044 071	057 057	039 005	043 119	141 145	146 154	157 159
F 200	020 015	013 011	011 010	010 010	009 017	023 030	032 037	049 061	064 063	061 061	062 056	055 051
F 160Z0	xxx 0xx											
F 120Z0	xxx 0xx											
F 80	016 014	013 007	007 005	016 034	032 026	022 020	020 023	018 013	022 032	039 048	055 057	061 061
F 40Z0	xxx 0xx											
F 20Z0	xxx 0xx											
F 10	015 012	012 012	004 003	003 012	012 012	026 009	009 008	005 005	008 014	018 020	020 023	023 021
F 2	xxx 0xx											
T 200	+107 +108	+109 +108	+108 +106	+103 +103	+102 +100	+101 +099	+097 +097	+097 +098	+098 +098	+096 +096	+096 +095	+095 +097
T 160	+111 +112	+112 +112	+112 +112	+112 +107	+107 +102	+101 +098	+099 +098	+098 +098	+098 +098	+098 +098	+097 +097	+095 +095
T 120	+116 +116	+116 +115	+115 +108	+102 +102	+102 +099	+099 +098	+098 +097	+095 +095	+096 +096	+098 +098	+097 +097	+094 +094
T 80	+119 +120	+120 +119	+118 +118	+109 +104	+104 +104	+100 +097	+098 +098	+098 +098	+094 +094	+094 +094	+094 +094	+094 +094
T 40	+123 +124	+123 +122	+122 +108	+103 +101	+097 +095	+095 +094	+095 +089	+084 +084	+084 +084	+076 +076	+098 +096	+094 +094
T 20	+125 +125	+125 +123	+123 +114	+109 +093	+092 +092	+087 +087	+083 +083	+084 +084	+076 +076	+067 +067	+070 +070	+074 +075
T 9	+126 +126	+125 +125	+123 +114	+097 +087	+083 +083	+082 +082	+078 +078	+074 +074	+071 +071	+058 +058	+053 +052	+048 +048
T 2	+129 +128	+125 +123	+116 +100	+083 +083	+061 +051	+043 +043	+033 +033	+029 +020	+017 +013	+006 +006	+001 +011	+023 +028
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

230373

230373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13

230373

230373

240373

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	174	128	102	098	093	097	100	105	109	120	128	136	144	149	157	158	162	164	169	174	178	182	187	188
D 80	143	129	105	080	068	087	090	096	106	117	116	121	132	136	141	146	154	161	159	159	160	165	170	174
D 10	135	133	078	040	023	034	041	060	079	097	107	107	107	114	120	124	127	128	134	131	131	136	136	125
F 200	513	009	008	007	009	015	019	026	036	044	059	062	066	075	083	084	071	063	069	076	075	077	066	064
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	204	010	008	010	016	020	027	039	047	054	066	060	090	096	093	093	085	081	082	087	082	081	078	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	013	009	006	001	006	007	012	013	016	017	020	023	023	026	027	032	031	027	020	023	023	019	023	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
T 200	*129	+130	+130	+130	+128	+127	+127	+125	+126	+126	+125	+126	+128	+129	+130	+131	+131	+131	+129	+127	+127	+124	+126	+123
T 160	+133	+134	+134	+133	+132	+131	+131	+130	+128	+129	+127	+127	+129	+130	+130	+134	+131	+129	+129	+127	+127	+123	+122	+123
T 120	+139	+138	+139	+137	+135	+134	+134	+132	+130	+131	+129	+127	+128	+129	+130	+130	+129	+129	+129	+128	+122	+120	+121	+123
T 80	+141	+141	+142	+141	+139	+137	+137	+135	+135	+133	+133	+131	+128	+125	+127	+126	+123	+124	+129	+116	+116	+110	+112	+115
T 40	+145	+145	+145	+144	+141	+138	+136	+134	+131	+126	+122	+121	+110	+105	+097	+094	+091	+092	+085	+082	+080	+081	+079	+088
T 20	+147	+147	+147	+145	+140	+137	+133	+129	+124	+118	+110	+107	+103	+094	+086	+082	+077	+074	+070	+067	+065	+064	+061	+062
T 9	+149	+148	+149	+145	+138	+129	+126	+117	+116	+112	+104	+100	+097	+089	+080	+075	+072	+069	+065	+060	+059	+059	+055	+053
T 2	+150	+149	+148	+141	+128	+109	+092	+079	+080	+074	+071	+077	+065	+079	+063	+059	+055	+043	+047	+043	+042	+044	+042	+042
C 200	*000	-000	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 20	-001	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

240373

240373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
189	185	179	172	176	178	188	193	201	210	214	199	192	194	194	192	194	193	203	202	202	202	D 200		
174	174	173	173	185	192	193	196	194	185	188	181	180	189	195	191	193	194	199	200	199	200	D 80		
129	124	126	110	118	131	127	143	147	157	162	173	173	167	172	182	192	185	190	196	202	205	203	D 10	
066	065	071	069	058	057	058	060	077	090	100	112	114	084	068	067	076	071	084	090	102	119	129	120	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0											
050	078	057	054	066	064	067	076	084	079	063	056	048	052	059	074	064	079	092	094	112	117	107	107	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
029	029	012	017	016	025	031	031	032	034	034	040	039	043	051	062	055	063	067	074	085	087	072	072	F 20
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10											
*145	+129	+131	+132	+135	+132	+131	+131	+129	+130	+136	+138	+133	+118	+127	+138	+144	+151	+158	+162	+165	+166	+168	+168	T 200
+129	+129	+132	+132	+132	+131	+131	+130	+130	+133	+128	+112	+116	+130	+143	+149	+156	+163	+167	+170	+172	+174	+172	+160	
+122	+123	+116	+125	+120	+120	+125	+125	+116	+095	+101	+103	+116	+134	+134	+149	+163	+167	+173	+175	+177	+178	+176	+160	
+106	+100	+094	+083	+101	+075	+106	+088	+108	+085	+076	+090	+091	+101	+116	+135	+150	+155	+162	+169	+174	+177	+180	+179	T 80
+036	+038	+071	+066	+059	+051	+059	+043	+045	+053	+071	+090	+104	+120	+140	+145	+156	+160	+167	+175	+179	+182	+184	+183	T 40
+064	+062	+046	+044	+040	+034	+032	+033	+040	+053	+074	+092	+104	+124	+144	+159	+164	+172	+178	+182	+185	+187	+187	+185	T 20
+050	+054	+030	+023	+030	+025	+023	+029	+040	+054	+077	+096	+112	+129	+149	+164	+177	+183	+186	+188	+189	+189	+185	+185	T 10
-006	-006	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

240373

240373

250373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
253	238	237	242	244	248	244	238	240	236	219	213	207	215	215	218	218	220	223	229	230	254	258	D 200	
242	239	230	235	243	234	222	221	222	220	206	199	206	202	206	212	212	214	216	223	226	257	284	D 80	
232	223	223	220	241	241	229	221	216	221	205	211	211	201	210	209	214	220	218	223	226	232	261	D 10	
065	066	073	082	083	088	084	093	082	087	075	061	053	055	059	057	057	057	057	069	064	058	048	042	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0											
060	044	051	058	065	066	062	060	056	051	057	047	049	054	060	056	056	056	068	063	056	049	039	F 80	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
031	021	022	023	029	030	033	032	031	039	041	038	041	047	051	047	049	046	049	053	055	048	044	032	F 2
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10											
*076	+074	+075	+073	+072	+070	+070	+071	+071	+077	+073	+073	+071	+074	+076	+076	+078	+084	+084	+091	+089	+088	+086	+083	

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15				
075 079	081 078	076 083	074	135	111 122	118 118	088 xxx	057 051	092 092	106 137	126 134	121 111	D 200		
079 080	079 074	070 072	075	077	174 070	064 066	061 094	079 060	088 103	101 133	118 143	171 141	D 80		
080 090	081 004	009	017	033	055	014 004	003 030	046 122	079 054	084 100	097 132	118 146	181 157	D 10	
050 053	050 046	053 049	047	045	236	030	025 025	013 xxx	006 009	010 016	023 016	019 017	016 023		
xxx	F 200														
xxx	F 160Z														
xxx	F 120Z														
053 055	050 049	053 062	064	064	057	047	022	017	015 014	012 012	010 014	023 019	020 016	010 017	
xxx	F 80														
xxx	F 40Z														
xxx	F 20Z														
012 021	015 015	015 017	019	017	011	012	009	008	012 012	016 012	012 011	015 020	021 020	017 010	013
xxx	F 10														
xxx	F 2														
+068 +069	+069 +067	+065 +066	+066	+062	+059	+056	+053 +051	+047 +049	+051 +053	+058 +061	+062 +060	+061 +061	+064 +062	T 200	
+069 +072	+069 +067	+067 +067	+064 +064	+060	+057	+053	+049 +049	+049 +053	+054 +057	+062 +062	+065 +066	+064 +065	+065 +067	T 160	
+070 +073	+073 +070	+069 +068	+069 +068	+065 +060	+057 +057	+051 +046	+053 +058	+058 +061	+068 +070	+070 +070	+069 +069	+071 +070	+069 +069	T 120	
+071 +070	+070 +066	+062 +057	+064 +066	+062 +062	+056 +047	+036 +045	+055 +060	+062 +062	+065 +070	+073 +073	+072 +072	+074 +073	+072 +072	T 80	
+049 +054	+048 +043	+043 +039	+038 +022	+016	+022 +022	+033 +047	+058 +064	+066 +069	+074 +077	+078 +076	+076 +076	+078 +077	+077 +075	T 40	
+018 +013	-000 -010	-014 -008	-002	+005	+010 +020	+032 +046	+055 +058	+059 +069	+077 +079	+080 +078	+078 +079	+083 +079	+076 +077	T 20	
-017 -016	-014 -017	-016 -010	-004	-001	+008	+021 +033	+047 +057	+061 +070	+073 +078	+081 +081	+081 +079	+080 +079	+077 +077	T 9	
-022 -018	-020 -018	-018 -017	-012 -004	-001	+009	+023 +035	+050 +059	+072 +071	+075 +081	+084 +083	+082 +082	+091 +080	+076 +076	T 2	
-000 +000	+000 -000	-000 -000	-000 -000	-001 +004	-000 -000	+000 +000	+001 +002	xxx	-001 -001	-001 -001	-000 -000	-000 -001	-001 -001	-000 -000	
+002 +012	+003 +001	+000 +000	+000 -010	+000 +000	+000 +000	+000 +000	+001 +001	+002 -002	+001 +000	+000 -000	+000 -000	+003 +000	+000 -000	CT 200	
+002 +012	+003 +001	+000 +000	+000 -010	+000 +000	+000 +000	+000 +000	+001 +001	+002 -002	+001 +000	+000 -000	+000 -000	+003 +000	+000 -000	CT 20	

290373												290373												300373		CABA UW	
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-12	02-03	02-04	03-05	04-06	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15		
D200	012 011 012	xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
S 80	014 012 016	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
D 10	011 007 014	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F200	060 066 065	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	057 065 066	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 10	044 050 040	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F200	+076 +076 +075	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F160	+081 +081 +080	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F120	+086 +085 +084	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F 80	+089 +088 +087	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F 40	+094 +092 +091	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F 20	+096 +095 +094	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
F 2	+102 +103 +097	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
CT200	-000 -000 -000	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										
CT 2	-000 -000 -000	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx										

300373												300373												300373		CABA UW																																																																																									
GMT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	02-04	03-05	04-06	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15																																																																																										
xxx	xxx	xxx	xxx	161	161	191	195	196	218	208	242	244	260	264	259	269	267	270	262	239	230	234	260	D 200	D 80	D 10																																																																																									
xxx	xxx	xxx	xxx	142	139	150	157	158	187	180	219	227	255	265	255	264	268	271	258	231	225	232	259	D 200	F 80	F 40Z0																																																																																									
xxx	xxx	xxx	xxx	056	029	356	354	144	210	154	222	226	253	268	258	268	275	272	260	234	225	236	263	D 200	F 80	F 40Z0																																																																																									
xxx	xxx	xxx	xxx	011	012	008	008	009	015	017	024	027	030	034	036	036	044	045	049	052	057	077	F 200	F 160Z0	F 120Z0																																																																																										
xxx	xxx	xxx	xxx	006	011	009	007	013	012	019	017	019	030	033	035	036	037	043	046	049	056	074	F 80	F 40Z0	F 200																																																																																										
xxx	xxx	xxx	xxx	002	004	004	003	005	007	013	015	018	029	030	035	034	037	040	038	046	047	063	F 10	F 2	F 200																																																																																										
xxx	xxx	xxx	xxx	+058 +058 +058	+057 +057 +057	+057 +057 +057	+057 +057 +057	+055 +055 +055	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	T 200	T 160	T 120																																																																																						
xxx	xxx	xxx	xxx	+061 +061 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+057 +057 +057	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	T 200	T 160	T 120																																																																																					
xxx	xxx	xxx	xxx	+062 +062 +061	+061 +061 +060	+060 +060 +060	+060 +060 +060	+062 +062 +061	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	+060 +060 +060	T 80	T 40	T 20																																																																																					
xxx	xxx	xxx	xxx	+002 +002 +002	+006 +006 +006	+006 +006 +006	+006 +006 +006	+007 +007 +007	+004 +004 +004	+004 +004 +004	+004 +004 +004	+004 +004 +004	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	+005 +005 +005	T 80	T 40	T 20																																																																																				
xxx	xxx	xxx	xxx	+014 +014 +014	+015 +015 +015	+010 +010 +010	+009 +009 +009	+008 +008 +008	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	+007 +007 +007	T 80	T 40	T 20																																																																																				
xxx	xxx	xxx	xxx	+011 +011 +011	+012 +012 +012	+011 +011 +011	+012 +012 +012	+014 +014 +014	+013 +013 +013	+014 +014 +014	+013 +013 +013	+015 +015 +015	+016 +016 +016	+017 +017 +017	+018 +018 +018	+019 +019 +019	+020 +020 +020	+021 +021 +021	+022 +022 +022	+023 +023 +023	+024 +024 +024	+025 +025 +025	+026 +026 +026	+027 +027 +027	+028 +028 +028	+029 +029 +029	+030 +030 +030	+031 +031 +031	+032 +032 +032	+033 +033 +033	+034 +034 +034	+035 +035 +035	+036 +036 +036	+037 +037 +037	+038 +038 +038	+039 +039 +039	+040 +040 +040	+041 +041 +041	+042 +042 +042	+043 +043 +043	+044 +044 +044	+045 +045 +045	+046 +046 +046	+047 +047 +047	+048 +048 +048	+049 +049 +049	+050 +050 +050	+051 +051 +051	+052 +052 +052	+053 +053 +053	+054 +054 +054	+055 +055 +055	+056 +056 +056	+057 +057 +057	+058 +058 +058	+059 +059 +059	+060 +060 +060	+061 +061 +061	+062 +062 +062	+063 +063 +063	+064 +064 +064	+065 +065 +065	+066 +066 +066	+067 +067 +067	+068 +068 +068	+069 +069 +069	+070 +070 +070	+071 +071 +071	+072 +072 +072	+073 +073 +073	+074 +074 +074	+075 +075 +075	+076 +076 +076	+077 +077 +077	+078 +078 +078	+079 +079 +079	+080 +080 +080	+081 +081 +081	+082 +082 +082	+083 +083 +083	+084 +084 +084	+085 +085 +085	+086 +086 +086	+087 +087 +087	+088 +088 +088	+089 +089 +089	+090 +090 +090	+091 +091 +091	+092 +092 +092	+093 +093 +093	+094 +094 +094	+095 +095 +095	+096 +096 +096	+097 +097 +097	+098 +098 +098	+099 +099 +099	+010 +010 +010	+011 +011 +011	+012 +012 +012	+013 +013 +013	+014 +014 +014	+015 +015 +015	+016 +016 +016	+017 +017 +017	+018 +018 +018	+019 +019 +019	+020 +020 +020	+021 +021 +021	+022 +022 +022	+023 +023 +023	+024 +024 +024	+025 +025 +025	+026 +026 +026	+027 +027 +027	+028 +028 +0

270373

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	270373	280373	CABA UW									
D 200	107	087	077	072	072	056	050	043	055	061	051	045	064	066	072	063	061	043	059	108	138	207	225	232
D 80	130	110	095	073	075	070	052	045	049	048	028	017	038	050	053	033	029	038	018	085	170	193	239	318
D 10	148	119	076	062	057	056	044	041	033	014	349	343	014	009	028	347	322	321	310	252	230	255	291	296
F 200	032	032	032	030	035	032	037	034	036	032	030	023	024	025	029	025	018	015	010	007	005	005	006	012
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	026	016	015	025	025	030	033	030	034	029	027	027	022	023	019	014	023	015	006	002	007	007	003	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	025	007	007	015	013	016	014	014	013	017	016	013	011	012	015	009	014	007	004	001	006	008	008	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+054	+052	+050	+046	+044	+046	+051	+050	+050	+048	+048	+050	+049	+049	+048	+045	+046	+048	+049	+046	+048	+049	+046	+043
T 160	+061	+056	+054	+050	+048	+046	+052	+054	+053	+052	+051	+051	+051	+051	+051	+049	+050	+051	+051	+049	+049	+049	+049	+043
T 120	+005	+063	+063	+062	+061	+059	+058	+057	+057	+056	+055	+054	+054	+054	+054	+053	+053	+052	+053	+053	+053	+053	+051	+049
T 80	+068	+067	+066	+065	+065	+063	+061	+060	+060	+060	+058	+053	+056	+056	+056	+056	+055	+055	+055	+055	+056	+053	+050	
T 40	+069	+068	+069	+068	+066	+064	+063	+061	+061	+059	+058	+058	+057	+057	+056	+056	+055	+055	+056	+056	+056	+056	+052	+051
T 20	+071	+070	+070	+071	+069	+067	+064	+062	+061	+060	+058	+056	+057	+057	+056	+056	+055	+055	+052	+053	+052	+052	+050	+050
T 9	+072	+071	+071	+070	+069	+067	+064	+061	+060	+059	+057	+055	+056	+056	+056	+055	+054	+052	+050	+051	+052	+052	+050	+050
T 2	+072	+071	+071	+070	+068	+065	+062	+058	+058	+058	+055	+055	+052	+054	+055	+055	+054	+051	+050	+049	+049	+049	+049	+041
CT 201	-005	-006	-006	-009	-011	-007	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001	-001	+000	-000	-000	-000	-001
CT 21	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001	+000	+000	+000	+000	+000	-001

280373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	280373												
244	242	257	282	317	310	288	297	303	297	305	314	339	335	001	331	248	252	145	240	238	279	291	312	D 200
229	220	238	269	302	281	255	273	297	284	313	346	039	052	336	359	xxx	273	140	229	243	280	288	312	D 80
245	227	24	264	294	252	233	265	299	308	355	050	148	307	041	112	323	217	225	260	296	279	312	D 10	
011	007	009	016	027	022	016	017	022	019	021	020	012	013	011	007	008	009	014	014	018	019	023	039	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0												
006	007	012	015	024	023	025	024	026	020	020	010	008	006	008	009	011	015	017	017	019	040	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
003	005	011	016	021	026	020	023	020	020	020	008	010	007	009	007	008	008	015	017	017	036	010	F 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2												
*041	+041	+040	+038	+038	+039	+038	+036	+033	+032	+034	+039	+042	+046	+046	+049	+061	+065	+068	+072	+074	+078	+081	+083	T 200
*045	+045	+043	+041	+041	+042	+042	+040	+036	+036	+041	+045	+045	+051	+061	+065	+069	+073	+076	+073	+082	+086	+087	+087	T 160
*048	+048	+044	+044	+044	+046	+046	+043	+039	+039	+039	+044	+049	+057	+062	+066	+070	+074	+077	+081	+084	+087	+090	+091	T 120
*051	+051	+049	+049	+049	+049	+046	+043	+041	+041	+042	+047	+052	+060	+065	+070	+073	+077	+080	+084	+087	+090	+093	+095	T 80
*053	+052	+051	+050	+050	+053	+058	+052	+054	+049	+048	+052	+042	022	019	017	020	023	027	033	042	045	045	041	T 40
*052	+052	+052	+050	+050	+050	+050	+048	+048	+048	+048	+046	+050	+057	+064	+069	+074	+077	+081	+084	+088	+091	+095	+098	+099
*050	+052	+052	+050	+050	+050	+050	+046	+046	+046	+046	+047	+043	+053	+059	+068	+072	+076	+079	+083	+087	+091	+097	+100	T 20
*050	+048	+048	+046	+046	+045	+045	+044	+044	+044	+044	+046	+046	+046	+046	+046	+046	+046	+046	+046	+046	+046	+046	+046	T 2
*000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
*-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200

290373

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	290373												
343	356	357	006	023	025	019	018	023	035	040	039	036	031	029	025	020	013	022	019	025	015	010	010	D 200
335	348	355	357	000	013	012	012	019	034	044	043	035	029	032	031	028	022	014	028	017	028	015	010	D 80
329	343	353	354	001	003	006	006	011	022	034	039	029	024	026	022	016	011	025	015	021	012	009	010	D 10
059	068	064	074	066	060	062	060	080	081	081	071	067	062	055	057	060	062	060	059	063	059	059	059	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0												
046	051	044	055	052	050	050	057	061	061	053	062	055	053	051	054	056	060	058	058	060	058	057	057	F 120Z0
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80												
028	022	031	027	026	026	033	034	038	039	037	045	041	037	038	044	047	047	050	049	047	047	043	043	F 40Z0
xxx	xxx	xxx	xxx	xxx</																				

010473															010473														
03-04		04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15							
2-3	235	236	237	237	238	238	239	240	242	245	249	251	254	256	258	257	259	261	260	260	253	249	280	282	D200				
2-2	227	228	229	228	229	230	231	237	240	243	244	249	251	255	253	255	258	258	257	249	244	278	279	D 80					
221	228	230	231	230	233	274	240	242	246	248	253	255	258	255	258	261	261	261	252	243	281	260	D 10						
120	138	134	137	138	144	150	155	148	147	138	134	132	146	144	143	152	160	154	154	139	145	150	164	F200					
Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx		
Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx		
005	104	106	110	111	114	120	125	126	125	118	119	115	131	122	126	132	143	137	138	120	125	121	133	F 80					
Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx		
Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx		
007	071	074	080	081	085	087	093	098	100	095	093	092	105	096	098	100	109	107	102	093	097	086	091	F 10					
Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx	Xxx		
+048	+051	+051	+050	+050	+051	+053	+055	+058	+060	+062	+064	+066	+067	+068	+069	+070	+072	+073	+070	+070	+047	+053	+041	+041	T 200				
+0-0	+054	+054	+054	+054	+054	+054	+056	+058	+062	+064	+065	+067	+070	+071	+072	+073	+074	+076	+077	+074	+050	+056	+043	+043	T 160				
-053	+057	+057	+057	+056	+057	+059	+061	+064	+067	+069	+071	+074	+075	+076	+077	+078	+080	+081	+079	+079	+053	+057	+045	+045	T 120				
+055	+060	+060	+060	+059	+060	+062	+064	+070	+071	+073	+075	+076	+078	+079	+080	+081	+082	+083	+084	+085	+082	+062	+066	+047	+047	T 80			
+057	+062	+063	+063	+062	+062	+065	+067	+073	+075	+077	+079	+082	+083	+084	+086	+086	+089	+089	+087	+071	+056	+049	+049	T 40					
+053	+063	+063	+064	+064	+064	+066	+069	+075	+077	+078	+081	+084	+085	+087	+088	+089	+091	+091	+090	+090	+066	+065	+051	+051	T 20				
+056	+061	+062	+062	+062	+062	+063	+066	+069	+076	+077	+079	+080	+083	+086	+087	+090	+092	+095	+094	+090	+078	+073	+057	+052	T 9				
+057	+061	+062	+062	+062	+062	+063	+066	+069	+076	+077	+080	+083	+086	+087	+090	+092	+095	+094	+090	+078	+073	+057	+052	T 2					
-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-003	-001	-000	-000	CT 200				
-010	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+001	-007	+009	-000	CT 20				

020473

020473

030473

CABA UW

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	242	250	261	272	286	295	302	303	307	310	312	314
D 80	237	245	257	267	282	290	296	299	303	305	307	310
D 10	241	248	259	269	282	291	297	300	303	305	307	311
F200	284	296	310	319	320	317	322	304	298	282	249	250
F160Z0	XXX											
F120Z0	XXX											
F 80	255	263	269	285	286	290	289	273	265	246	220	217
F 40Z0	XXX											
F 20Z0	XXX											
F 10	207	210	215	218	224	221	222	208	203	191	171	168
F 2	XXX											
T200	+041	+033	+025	+022	+019	+018	+018	+018	+017	+019	+022	+027
T160	+044	+035	+027	+024	+023	+022	+020	+021	+021	+022	+027	+030
T120	+048	+040	+031	+028	+027	+029	+030	+025	+024	+026	+029	+030
T 80	+052	+043	+033	+029	+028	+026	+025	+026	+029	+024	+027	+034
T 40	+056	+046	+037	+033	+032	+029	+028	+030	+030	+032	+034	+035
T 20	+057	+048	+039	+032	+035	+032	+035	+031	+030	+033	+034	+035
T 4	+058	+043	+035	+030	+029	+031	+026	+021	+019	+024	+028	+030
T 2	+057	+048	+035	+031	+030	+032	+027	+022	+020	+026	+031	+035
C200	+000	+000	-000	-000	-000	-000	-003	-003	-003	-000	-000	-000
CT 20	-000	+000	+000	-001	+004	+003	+007	+001	+004	-000	+002	+008
	*	*	*	*	*	*	*	*	*	*	*	*
	*	*	*	*	*	*	*	*	*	*	*	*
	*	*	*	*	*	*	*	*	*	*	*	*

030473

030473

030473

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
323	324	326	326	325	330	331	332	326	327	324	334	
327	326	329	330	338	329	334	336	337	330	333	335	
327	324	327	337	327	334	334	336	329	332	324	333	
181	189	166	183	185	182	164	163	167	155	165	161	
XXX												
XXX												
129	136	133	153	151	141	137	125	137	133	138	134	
XXX												
XXX												
U YU	072	070	109	109	077	092	070	100	098	100	095	101
XXX												
+015	+024	+030	+034	+027	+032	+031	+029	+029	+028	+031	+035	+038
+018	+033	+037	+030	+035	+034	+032	+033	+037	+032	+033	+037	+042
+025	+036	+040	+032	+038	+037	+035	+036	+040	+035	+039	+047	+045
+021	+033	+039	+043	+035	+040	+038	+039	+044	+037	+041	+043	+043
+022	+030	+040	+045	+037	+041	+042	+042	+048	+040	+042	+045	+047
+023	+050	+041	+045	+038	+041	+042	+042	+044	+050	+043	+046	+052
+023	+029	+041	+045	+018	+041	+042	+044	+051	+042	+045	+049	+057
+023	+020	+035	+042	+035	+038	+039	+040	+044	+052	+041	+053	+055
+021	+031	+023	+031	+035	+024	+026	+020	+017	+016	+015	+020	+020
+001	+001	-016	-007	-000	-000	-000	-000	-000	-000	-000	-000	-000
-001	-002	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
	*	*	*	*	*	*	*	*	*	*	*	*
	*	*	*	*	*	*	*	*	*	*	*	*
	*	*	*	*	*	*	*	*	*	*	*	*

030473

030473

040473

CABA UW

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	XXX											
D 80	320	312	319	319	326	322	334	325	312	311	321	317
D 10	321	316	316	311	319	315	325	301	270	276	292	274
F200	XXX											
F160Z0	XXX											
F120Z0	XXX											
F 80	128	130	085	104	091	086	091	076	068	053	070	077
F 40Z0	XXX											
F 20Z0	XXX											
F 10	199	098	060	074	054	052	050	039	030	025	034	024
F 2	XXX											
T200	+043	+027	+007	+021	+029	+027	+025	+029	+029	+031	+033	+033
T160	+037	+030	+024	+030	+032	+027	+031	+031	+033	+033	+034	+034
T120	+041	+033	+026	+033	+033	+032	+036	+033	+034	+036	+037	+037
T 80	+045	+036	+026	+036	+033	+025	+031	+032	+033	+035	+037	+038
T 40	+050	+040	+027	+039	+033	+034	+025	+030	+028	+029	+031	+039
T 20	+052	+042	+030	+041	+034	+035	+024	+028	+023	+021	+022	+026
T 4	+023	+043	+019	+023	+031	+035	+024	+026	+020	+017	+016	+015
T 2	+055	+044	+025	+041	+032	+021	+019	+007	+001	+003	+004	+006
C200	-000	-000	-016	-007	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000
	*	*	*	*	*	*	*	*	*	*	*	*
	*	*	*	*	*	*	*	*	*	*	*	*
	*	*	*	*	*	*	*	*	*	*	*	*

040473

040473

040473

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
221	248	237	225	219	216	219	220	221	215	210	209	204
230	238	235	220	216	206	207	214	215	203	198	197	196
193	208	203	194	195	184	197	210	210	202	199	200	198
050	068	069	074	089	106	120	131	137	136	129	135	137
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
048	067	064	072	087	092	084	082	087	088	102	104	107
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
029	030	029	034	035	035	038	043	046	051	059	066	078
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
+030	+029	+030	+025	+026	+024	+023	+024	+022	+019	+017	+019	+018
+034	+032	+033	+032	+027	+028	+024	+019	+019	+018	+020	+023	+027
+036	+035	+036	+034	+028	+025	+020	+016	+016	+018	+020	+023	+027
+036	+034	+035	+034	+023	+017	+014	+012	+016	+019	+022	+023	+027
+019	+020	+024	+020	+008	+005	+008	+011	+016	+020	+025	+027	+035
+005	+007	+011	+006	+002	+006	+011	+017	+022	+026	+028	+033	+037
+002	+001	+006	+002	+001	+005							

040473

040473

050473

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	211	205	197	196	199	203	211	212	213	217	219	220
D 80	207	200	194	191	195	194	199	205	204	210	210	213
D 10	212	203	194	187	191	190	200	206	207	212	212	216
F 200	144	150	157	157	160	177	177	192	172	165	164	171
F160Z0	xxx											
F120Z0	xxx											
F 80	125	125	125	114	119	127	132	145	130	126	127	140
F 40Z0	xxx											
F 20Z0	xxx											
F 10	087	091	090	084	087	087	084	096	083	084	086	102
F 2	xxx											
T200	+014	+016	+018	+019	+017	+040	+052	+058	+062	+064	+054	+053
+160	+017	+018	+020	+022	+024	+041	+053	+061	+065	+067	+057	+055
+120	+020	+021	+023	+025	+026	+042	+054	+063	+067	+069	+059	+057
T 80	+022	+024	+026	+027	+029	+044	+056	+065	+069	+072	+072	+063
T 40	+025	+027	+028	+030	+028	+046	+057	+067	+070	+073	+074	+067
T 20	+027	+028	+030	+031	+029	+044	+058	+067	+071	+074	+075	+068
T 9	+028	+029	+031	+032	+029	+045	+058	+067	+070	+074	+075	+069
T 2	+029	+030	+031	+033	+030	+038	+056	+065	+058	+072	+073	+069
CT200	-000	-000	-000	-000	-008	-004	-000	-000	-000	-000	-001	-000
CT 20	-000	-000	-000	+000	-010	-006	-000	-000	-000	-000	-002	+000

050473

050473

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
239	237	240	241	241	242	240	242	244	245	247	249
234	231	233	234	235	234	231	234	235	239	241	252
236	235	236	238	238	236	233	237	238	241	243	245
170	157	161	162	160	156	156	142	142	141	146	143
xxx											
xxx											
137	134	131	131	124	124	117	114	113	120	115	111
xxx											
xxx											
105	099	095	095	101	092	092	090	085	082	098	089
xxx											
+0/0	+070	+071	+071	+072	+072	+073	+074	+074	+074	+075	+075
+0/2	+073	+073	+074	+074	+074	+075	+075	+076	+076	+076	+076
+0/4	+074	+075	+075	+075	+076	+077	+077	+078	+078	+079	+079
+0/6	+076	+077	+077	+077	+078	+078	+079	+079	+080	+081	+082
+0/8	+075	+077	+079	+079	+080	+080	+081	+082	+082	+082	+082
+0/9	+079	+080	+080	+080	+080	+080	+081	+082	+084	+084	+084
+0/9	+080	+080	+081	+081	+081	+081	+082	+083	+084	+084	+085
+0/9	+080	+080	+081	+081	+081	+081	+082	+083	+084	+085	+086
+0/9	+080	+080	+081	+081	+081	+081	+082	+083	+084	+085	+086
* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

050473

050473

060473

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	275	xxx	xxx	xxx	265	262	269	278	272	260	257	260
D 80	274	310	308	284	274	251	269	285	282	265	234	229
D 10	277	310	304	269	268	243	269	286	282	265	227	220
F 200	023	xxx	xxx	xxx	041	056	070	068	064	069	062	066
F160Z0	xxx											
F120Z0	x:*	xxx										
F 80	073	058	050	024	022	030	048	059	063	055	039	037
F 40Z0	xxx											
F 20Z0	xxx											
F 10	054	039	026	016	013	025	032	034	032	024	033	037
F 2	xxx											
T200	+077	+072	+070	+071	+072	+071	+071	+069	+076	+078	+080	+083
+160	+080	+076	+074	+074	+075	+074	+075	+073	+074	+073	+073	+075
+120	+084	+079	+078	+077	+078	+076	+078	+073	+074	+078	+078	+075
T 80	+068	+082	+081	+081	+081	+080	+078	+075	+073	+072	+071	+071
T 40	+011	+085	+083	+083	+084	+084	+083	+081	+077	+073	+072	+072
T 20	+093	+087	+084	+085	+085	+084	+082	+078	+074	+072	+072	+072
T 9	+094	+087	+084	+086	+085	+084	+082	+078	+074	+070	+071	+072
T 2	+095	+086	+084	+086	+083	+081	+083	+082	+077	+071	+062	+068
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
265	263	264	260	260	261	256	250	253	257	253	266	261
251	249	252	249	248	251	243	236	239	252	250	240	239
246	237	246	245	245	248	259	232	239	254	266	250	247
102	098	095	099	104	096	090	083	092	097	111	108	110
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
078	070	076	072	070	083	068	064	067	062	082	100	103
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
041	035	043	045	045	052	044	047	050	061	066	077	085
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+064	+061	+058	+058	+057	+056	+055	+053	+052	+054	+052	+054	+057
+067	+064	+063	+060	+059	+058	+055	+058	+058	+058	+064	+064	+065
+070	+067	+066	+064	+063	+062	+058	+061	+060	+062	+065	+067	+067
+071	+068	+066	+064	+063	+061	+062	+065	+065	+064	+069	+070	+071
+072	+069	+068	+066	+066	+065	+064	+065	+069	+068	+070	+074	+074
+073	+067	+066	+065	+065	+065	+067	+071	+071	+072	+073	+073	+074
+074	+068	+067	+066	+066	+065	+065	+067	+070	+074	+074	+075	+075
+075	+069	+068	+067	+066	+065	+065	+067	+070	+074	+074	+076	+076
+076	+070	+069	+068	+067	+066	+065	+067	+070	+075	+075	+077	+078
+077	+071	+070	+069	+068	+067	+066	+067	+071	+074	+074	+076	+078
+078	+072	+071	+070	+069	+068	+067	+068	+070	+075	+075	+077	+078
+079	+073	+072	+071	+070	+069	+068	+069	+071	+076	+076	+078	+079

760473

26242

070473

272-153

230473

080473

51

630471

080473

290473

SABAH

090475

090473

090473

• • •

100477

100473

100473

110473

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	xxx											
D 80	314	315	322	xxx	xxx	308	310	301	305	299	295	296
D 10	315	316	322	317	305	307	306	291	292	289	280	293
F 200	xxx											
F 160Z0	xxx											
F 120Z0	xxx											
F 80	09	069	070	xxx	xxx	073	057	060	073	069	063	060
F 40Z0	xxx											
F 20Z0	xxx											
F 10	073	053	050	058	039	049	034	026	023	032	029	034
F 2	xxx											
T 200	+037	xxx	xxx	+038	+037	+037	+037	+037	+038	+038	+039	+039
T 160	+041	xxx	xxx	+042	+040	+041	+040	+041	+042	+042	+041	+042
T 120	+043	+042	xxx	+046	+044	+044	+044	+045	+044	+045	+044	+044
T 80	+045	+045	+048	xxx	xxx	+047	+047	+048	+047	+048	+044	+045
T 40	+050	+049	+052	+053	+050	+050	+049	+047	+047	+046	+042	+042
T 20	+053	+051	+054	+055	+052	+051	+050	+044	+042	+044	+043	+043
T 9	+054	+052	+054	+055	+052	+051	+049	+041	+038	+040	+041	+037
T 2	+053	+054	+054	+055	+052	+050	+045	+030	+030	+033	+034	+032
C 200	xxx											
CT 20	-000	-000	-000	xxx	xxx	-000	-000	-000	-000	-000	-000	-000

110473

110473

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
269	277	281	280	291	xxx						
257	268	273	282	294	292	306	323	325	331	305	308
255	268	272	271	296	291	290	305	321	323	314	306
136	138	133	124	114	xxx	xxx	xxx	115	xxx	xxx	xxx
xxx											
xxx											
098	105	103	096	097	081	096	099	110	099	099	086
xx	xxx										
xx	xxx										
058	063	067	063	xxx							
xxx											
+046	+046	+047	+041	+036	+037	+034	+026	+020	+015	+014	+020
+043	+049	+050	+047	+044	+041	+038	+029	+018	+016	+014	+023
+050	+051	+052	+053	+050	+046	+044	+043	+032	+021	+019	+029
+051	+053	+055	+057	+052	+045	+046	+044	+035	+028	+024	+032
+051	+054	+056	+060	+057	+052	+049	+048	+038	+032	+027	+035
+051	+055	+056	+061	+061	+058	+053	+050	+033	+029	+027	+036
+050	+055	+059	+061	+061	+058	+053	+050	+033	+026	+026	+036
+050	+055	+059	+061	+061	+058	+053	+050	+033	+026	+026	+036
+046	+053	+058	+060	+058	+053	+049	+049	+041	+035	+032	+029
-000	-000	-000	-000	-001	-003	-005	-001	-000	-000	-000	-000
+000	-000	-000	-000	-001	-004	-008	+000	-000	-000	-000	-000

110473

110473

120473

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	xxx											
D 80	317	315	307	324	308	311	315	313	303	310	308	314
D 10	316	313	305	322	308	313	307	299	301	303	302	309
F 200	x: x	xxx										
F 160Z0	xxx											
F 120Z0	xxx											
F 80	132	131	134	143	098	100	089	081	087	097	085	102
F 40Z0	xxx											
F 20Z0	xxx											
F 10	099	098	104	103	062	063	063	049	043	050	056	043
F 2	xxx											
T 200	+044	+045	+044	+026	+024	+040	+041	+040	+039	+038	+036	+030
T 160	+048	+049	+048	+029	+026	+038	+044	+043	+042	+042	+040	+039
T 120	+052	+053	+052	+032	+027	+043	+046	+044	+046	+042	+041	+041
T 80	+056	+057	+056	+034	+029	+048	+050	+048	+046	+047	+044	+047
T 40	+060	+062	+060	+038	+032	+044	+048	+046	+047	+045	+040	+040
T 20	+063	+065	+063	+040	+033	+042	+050	+047	+045	+047	+044	+043
T 9	+034	+066	+064	+041	+033	+047	+051	+045	+044	+046	+044	+043
T 2	+036	+068	+065	+045	+035	+042	+047	+041	+040	+042	+033	+030
*	*	*	*	*	*	*	*	*	*	*	*	*
C 200	-000	-000	-000	+000	+000	+000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	+001	+000	-006	-002	-000	-000	-000	-000	-000

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
286	287	303	310	288	316	309	302	293	289	303	305	310
271	262	287	273	245	306	308	299	286	317	305	306	311
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
065	067	080	052	048	093	104	103	066	069	090	079	101
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
033	034	043	029	028	056	067	071	043	049	068	080	080
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+014	+023	+025	+024	+013	+010	+007	+013	+015	+013	+027	+028	+026
+016	+026	+028	+030	+026	+028	+013	+014	+016	+018	+024	+030	+024
+016	+026	+029	+030	+026	+028	+013	+014	+016	+017	+022	+036	+024
+017	+028	+030	+031	+020	+015	+014	+016	+024	+017	+022	+033	+024
+014	+025	+028	+028	+030	+023	+018	+017	+019	+024	+022	+033	+026
+009	+020	+024	+028	+028	+027	+019	+021	+024	+026	+027	+032	+026
+007	+017	+016	+014	+015	+016	+019	+019	+021	+023	+023	+030	+024
+002	+010	+016	+015	+013	+016	+019	+021	+024	+026	+033	+036	+045
*	*	*	*	*	*	*	*	*	*	*	*	*
+001	-005	-000	-000	-001	-001	-000	-002	-003	-000	-013	-005	-002
-005	+005	+004	-000	+005	+009	-000	-001	-001	-001	-002	-005	+000
CT 200	-000	-000	-000	+001	+000	-006	-002	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	+001	+000	-006	-002	-000	-000	-000	-000	-000

120473

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW			
D 200	xxx 341 333 333	xxx 333 333	xxx 334 355 348	355 353	354 352	355 004	359 352	352 351	338 xxx	340 348	353 xxx				
D 80	330 340 330 329	329 325 331	356 342 347	343 334	338 337	346 332	331 327	325 312	310 325	337 343	343 279				
D 10	328 338 331 329	322 329 354	338 333	326 313	312 308	310 301	281 279	276 267	276 293	314 296	273				
F 200	xxx 127 109 113	xxx 089 086	107 111 095	082 078	075 079	069 057	051 050	049 053	070 061	xxx					
F160Z0	xxx 099 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099				
F 80	106 115 093 105	097 073 065	080 078 072	071 074 067	065 055	048 047	046 043	040 045	054 059	058 050					
F 40Z0	xxx 099 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099				
F 20Z0	xxx 099 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099				
F 10	086 084 071 082	069 050 034	035 034	030 029	028 026	027 024	024 022	018 016	023 018	027 030					
F 2	xxx 099 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099	xxx 099 099				
T 200	+037 +016 +019	+033 +032 +034	+036 +037 +037	+037 +036 +036	+036 +035 +031	+033 +032 +032	+031 +032 +031	+031 +032 +027	+027 +027	+027 +021					
T 160	+041 +022 +024	+037 +036 +038	+039 +040 +040	+039 +038 +038	+034 +036 +035	+035 +034 +034	+035 +036 +037	+037 +038 +038	+037 +038 +037	+037 +038 +024	+021				
T 120	+045 +022 +024	+024 +038 +041	+042 +042 +042	+042 +042 +040	+040 +040 +037	+038 +036 +036	+037 +037 +037	+037 +038 +038	+037 +038 +037	+037 +038 +021	+021				
T 80	+049 +024 +028	+043 +045 +044	+044 +043 +043	+043 +043 +041	+043 +043 +041	+040 +040 +037	+039 +039 +038	+038 +038 +038	+038 +038 +037	+037 +038 +023	+023				
T 40	+054 +028 +032	+047 +047 +048	+046 +044 +046	+040 +040 +040	+038 +038 +036	+036 +036 +036	+035 +036 +035	+035 +034 +033	+033 +033 +021	+021 +025					
T 20	+057 +029 +034	+043 +048 +050	+046 +046 +040	+035 +034 +033	+030 +024 +025	+027 +027 +025	+025 +026 +026	+026 +020 +023	+021 +018 +016	+016 +009 +011	+013 +018 +016	+016 -017			
T 9	+058 +030 +035	+043 +049 +050	+045 +037 +032	+031 +027 +027	+025 +019 +023	+022 +018 +016	+016 +008 +006	+003 +006 +006	+010 +008 +006	+006 +006 +006	+007 +007 +009	+007 +009			
T 2	+063 +033 +039	+038 +049 +049	+042 +028 +023	+022 +018 +014	+011 +006 +006	+008 +006 +006	+006 +006 +006	+000 +000 +000	+000 +000 +000	+000 +000 +000	+000 +000 +000	+000 +000 +000			
CT 200	-001 -000 +002 +004	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000			
CT 20	-000 +001 -001 -006	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 +000 +000	-000 -002 +000	-000 -000 +000	-000 -000 -000	-000 -000 -000	-000 +000 +000	-000 -000 +000	-000 -000 +000	-000 -000 +000		

130473

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	130473	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	D 200	
291 314 288 276	289 305 298 261	280 285 281 293	299 293 291 291	299 291 291 291	299 291 291 291	299 291 291 291	299 291 291 291	299 291 291 291	299 291 291 291	299 291 291 291	299 291 291 291	D 80	
267 289 261 235	258 272 251 241	278 286 279 291	291 291 291 291	291 291 291 291	291 291 291 291	291 291 291 291	291 291 291 291	291 291 291 291	291 291 291 291	291 291 291 291	291 291 291 291	D 10	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	F 200	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	F160Z0	
045 043 043 041	053 041 053 041	039 038 047 047	039 047 041 041	047 041 041 041	047 041 041 041	047 041 041 041	047 041 041 041	047 041 041 041	047 041 041 041	047 041 041 041	047 041 041 041	F 80	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	F 40Z0	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	F 40Z0	
024 028 021 018	019 017 017 027	027 032 032 042	036 034 034 042	034 034 034 042	034 034 034 042	034 034 034 042	034 034 034 042	034 034 034 042	034 034 034 042	034 034 034 042	034 034 034 042	F 20Z0	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	F 10	
xxx 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	000 000 000 000	F 2	
+029 +031 +025	+026 +026 +026	+025 +028 +027	+027 +027 +027	+027 +031 +031	+032 +032 +032	+035 +035 +035	+035 +035 +035	+035 +035 +035	+035 +035 +035	+035 +035 +035	+035 +035 +035	T 200	
+031 +034 +028	+027 +029 +028	+028 +030 +030	+029 +030 +030	+030 +030 +030	+032 +032 +032	+035 +035 +035	+036 +036 +036	+036 +036 +036	+036 +036 +036	+036 +036 +036	+036 +036 +036	T 160	
+031 +037 +031	+029 +031 +031	+031 +033 +033	+033 +033 +033	+033 +033 +033	+032 +032 +032	+038 +038 +038	+042 +042 +042	+042 +042 +042	+042 +042 +042	+042 +042 +042	+042 +042 +042	T 120	
+030 +036 +033	+030 +030 +030	+031 +033 +033	+033 +033 +033	+033 +033 +033	+032 +032 +032	+034 +034 +034	+042 +042 +042	+042 +042 +042	+042 +042 +042	+042 +042 +042	+042 +042 +042	T 80	
+027 +036 +031	+026 +026 +023	+023 +029 +029	+029 +034 +035	+034 +046 +046	+047 +050 +050	+050 +050 +050	+054 +054 +054	+054 +054 +054	+055 +055 +055	+055 +055 +055	+055 +055 +055	T 40	
+021 +030 +024	+021 +018 +023	+023 +026 +026	+026 +038 +038	+049 +050 +050	+053 +053 +053	+053 +053 +053	+053 +053 +053	+053 +053 +053	+063 +063 +063	+063 +063 +063	+063 +063 +063	T 20	
+015 +025 +017	+014 +013 +017	+017 +022 +022	+031 +039 +039	+050 +050 +051	+054 +054 +054	+054 +054 +054	+054 +054 +054	+054 +054 +054	+066 +066 +066	+066 +066 +066	+066 +066 +066	T 9	
+001 +013 +006	+005 +005 +006	+015 +025 +025	+025 +055 +055	+046 +046 +046	+036 +036 +036	+025 +025 +025	+013 +013 +013	+023 +023 +023	+021 +024 +024	+019 +019 +019	+023 +023 +023	+015 +015 +015	T 2
-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	CT 200	
-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	-000 -000 -000	CT 20	

130473

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	130473
D 00	327 015 027	357 332 332	358 347 340	348 337 337	346 334 334	348 346 346	360 350 350	328 326 326	320 316 316	321 316 316	322 306 306	328 298 298	288 262
D 80	326 051 056	065 036 036	036 015 015	036 030 030	030 031 031	030 031 031	030 031 031	318 312 312	317 305 305	316 305 305	315 305 305	314 305 305	308 302 302
D 10	327 046 054	054 062 062	065 031 031	031 020 020	020 037 037	030 032 032	029 029 029	318 312 312	317 305 305	316 305 305	315 305 305	314 305 305	299 293 293
F 200	078 050 040	021 019 041	030 034 048	048 044 044	048 044 048	048 044 048	048 044 048	033 032 032	031 021 021	019 017 017	014 013 013	008 007 007	009 015 015
F160Z0	xxx 000 000	F 80											
F 80	077 048 031	0											

150473												150473				160473				CABA UW				
GMT	15-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03	
D 200	333	333	340	339	337	335	337	341	341	338	339	336	336	334	334	339	338	335	330	328	330	331	329	321
D 80	335	331	337	338	333	332	332	331	331	330	332	329	328	326	326	328	330	329	325	318	319	322	320	314
D 10	333	327	332	337	330	328	329	327	326	323	330	320	318	312	314	315	317	319	316	309	313	317	315	311
F 200	081	079	075	071	074	072	076	079	074	075	071	065	063	055	050	054	054	049	049	037	048	048	049	055
F 1500	079	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 1200	0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 80	080	075	073	070	071	065	070	068	062	061	058	049	044	039	038	040	044	041	040	032	043	043	042	041
F 400	0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 200	0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
F 10	063	061	057	053	053	050	048	045	037	038	036	030	026	021	025	023	025	024	024	021	027	026	026	021
F 2	0xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx									
T 200	+170	+068	+067	+066	+066	+064	+062	+061	+061	+060	+060	+061	+060	+059	+059	+059	+059	+059	+058	+058	+058	+059	+059	
T 160	+075	+072	+071	+070	+070	+068	+065	+063	+063	+062	+062	+062	+062	+062	+062	+062	+062	+061	+061	+061	+060	+061	+061	
T 120	+078	+075	+074	+074	+073	+072	+069	+067	+066	+065	+064	+065	+065	+065	+065	+064	+064	+064	+063	+063	+063	+063	+063	
T 80	+062	+079	+078	+078	+077	+075	+073	+070	+069	+068	+067	+067	+067	+067	+067	+067	+066	+066	+065	+065	+065	+065	+064	
T 40	+184	+084	+084	+082	+081	+079	+076	+073	+072	+071	+070	+071	+071	+071	+070	+070	+069	+068	+068	+068	+068	+068	+067	
T 20	+189	+086	+085	+084	+083	+081	+078	+074	+073	+072	+072	+073	+073	+072	+072	+072	+071	+071	+070	+070	+069	+069	+067	
T 9	+190	+087	+086	+085	+083	+081	+078	+075	+073	+073	+072	+073	+073	+072	+072	+072	+071	+069	+069	+069	+069	+069	+067	
T 2	+192	+089	+087	+086	+084	+081	+078	+075	+073	+072	+072	+073	+073	+072	+072	+072	+071	+071	+071	+070	+070	+069	+071	
CT 200	-100	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+003	+002	+001	+000	+000	+000	-000	-000	-000	-000	-000	-000	
CT 20	-100	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+001	+002	+001	+000	+001	+001	-000	-000	-000	-000	-000	-000	

160473																
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15					
325 313	332 328	324 323	337 337	330 328	331 329	326 319	326 330	332 335	331 329	348 345	335 324	D 200				
318 330	324 318	316 321	333 333	329 328	330 324	324 315	324 324	328 336	329 326	346 348	334 320	D 80				
312 324	316 311	311 319	330 330	329 329	329 328	323 313	319 322	326 333	329 322	343 345	333 319	D 10				
059 060	049 047	051 061	060 049	051 060	058 058	056 051	055 062	062 063	057 061	058 062	062 073	F 200				
xxx xxx	F 160Z															
xxx xxx	F 120Z															
048 047	042 043	046 057	034 050	051 057	051 052	054 049	048 058	050 060	055 057	056 056	060 074	F 80				
xxx xxx	F 40Z															
xxx xxx	F 20Z															
030 030	029 029	032 044	041 039	039 044	042 045	045 045	042 048	047 052	047 047	049 049	045 048	060 060	F 10			
xxx xxx	F ?															
+059 +059	+059 +058	+057 +057	+057 +057	+057 +058	+059 +061	+055 +066	+068 +068	+071 +068	+068 +071	+079 +085	+092 +095	+095 +090	T 200			
+061 +061	+061 +061	+060 +060	+060 +060	+060 +061	+061 +061	+064 +068	+068 +070	+074 +072	+071 +073	+084 +084	+096 +100	+099 +095	T 160			
+064 +064	+064 +063	+063 +062	+062 +062	+062 +063	+064 +064	+067 +070	+071 +073	+078 +081	+081 +083	+087 +093	+100 +103	+103 +098	T 120			
+066 +066	+066 +065	+065 +065	+064 +064	+064 +064	+065 +065	+066 +069	+073 +074	+075 +082	+085 +085	+087 +091	+097 +104	+107 +107	+107 +102	T 80		
+068 +068	+068 +068	+067 +067	+067 +067	+067 +068	+069 +069	+072 +072	+076 +077	+078 +085	+089 +089	+092 +096	+101 +109	+111 +111	+111 +107	T 40		
+069 +070	+069 +069	+069 +068	+069 +069	+070 +072	+072 +077	+083 +085	+086 +092	+091 +092	+094 +094	+099 +104	+111 +114	+114 +114	+114 +109	T 20		
+070 +070	+070 +069	+069 +069	+070 +070	+071 +075	+078 +080	+084 +092	+093 +094	+094 +096	+100 +105	+113 +115	+115 +115	+115 +110	T 9			
+070 +070	+070 +070	+069 +069	+070 +070	+072 +073	+079 +081	+083 +084	+095 +095	+097 +100	+106 +110	+119 +118	+118 +118	+118 +113	T 2			
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	C 200			
+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+001 +001	+003 +003	+001 +002	+002 +007	+000 -000	-000 -000	-000 -000	-000 -000	C 20			

160475

170475

170-73

160475

180473

180473

190473

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	30-01	01-02	02-03
D 00	716 319	317 315	314 326	340 332	327 320	337 332	323 324	329 325	340 337	324 336	339 333	331 334
D 80	316 312	319 313	306 326	343 332	321 315	336 331	319 320	328 322	337 333	320 330	343 325	324 330
D 10	315 318	318 314	307 324	339 332	316 310	337 329	316 317	322 318	332 332	314 323	343 315	315 320
F 200	112 115	110 105	115 108	095 106	103 107	111 109	107 113	114 114	131 130	129 132	130 124	129 145
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	103 104	102 093	100 058	072 079	082 071	092 083	079 086	085 087	111 097	092 100	098 098	085 107
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	074 077	074 071	071 064	049 055	053 044	064 052	047 055	053 053	070 074	056 055	063 068	041 058
F 2	xxx xxx											
T 00	+051 +054	+057 +052	+045 +047	+044 +040	+038 +041	+039 +030	+036 +040	+043 +030	+024 +016	+021 +018	+010 +015	+030 +030
T 260	+051 +058	+061 +056	+048 +049	+047 +043	+041 +043	+040 +034	+039 +043	+045 +034	+025 +025	+026 +020	+012 +014	+031 +033
T 120	+051 +062	+045 +060	+056 +053	+049 +044	+044 +042	+036 +033	+043 +049	+049 +042	+038 +020	+020 +020	+016 +014	+032 +034
T 80	+059 +066	+069 +064	+059 +055	+052 +049	+046 +048	+045 +039	+043 +049	+051 +039	+029 +021	+023 +023	+017 +019	+031 +035
T 40	+063 +070	+073 +065	+056 +060	+055 +052	+050 +051	+051 +055	+052 +054	+054 +042	+032 +023	+022 +025	+019 +014	+022 +035
T 20	+065 +072	+075 +070	+065 +065	+061 +060	+059 +058	+057 +052	+049 +053	+055 +043	+033 +024	+022 +026	+020 +020	+028 +033
T 9	+054 +064	+076 +066	+058 +059	+056 +054	+051 +052	+050 +043	+040 +052	+054 +042	+033 +024	+022 +026	+020 +012	+018 +032
T 2	+067 +074	+077 +068	+059 +060	+057 +054	+052 +052	+050 +044	+044 +047	+042 +034	+024 +022	+026 +020	+010 +017	+019 +019
C 201	xxx +005	+004 -002	-007 -001	-000 -000	+000 +003	+001 +001	-000 -000	-007 -007	-002 -002	-007 -009	-001 -008	-000 -000
C 20	-001 -003	-000 +001	+001 +005	+004 +003	+008 +005	+007 +009	+005 +001	-000 -001	-001 -000	-003 +000	+001 +002	+001 -000

190473

190473

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
336 348	336 337	336 337	342 344	344 343	342 343	336 338	336 338	336 338	336 337	335 338	354 357
333 337	334 335	337 337	342 345	346 346	342 343	334 340	340 337	336 336	337 337	340 357	360 360
324 332	328 331	331 335	339 342	344 344	340 340	331 338	338 335	337 337	334 339	336 338	355 359
147 147	138 153	155 149	133 121	107 113	122 113	128 134	134 131	124 129	130 131	128 122	133 133
xxx xxx											
xxx xxx											
108 114	102 116	121 119	109 102	092 101	114 105	124 127	129 126	124 124	121 125	122 116	121 121
xxx xxx											
071 062	072 077	072 074	069 074	069 075	085 083	094 095	101 101	100 105	098 100	098 087	089 089
xxx xxx											
+036 +035	+035 +036	+038 +038	+038 +040	+042 +046	+047 +050	+052 +053	+055 +053	+055 +055	+056 +058	+058 +058	+049 +041
+033 +036	+037 +039	+041 +041	+042 +044	+046 +050	+051 +055	+056 +056	+057 +057	+057 +057	+061 +061	+062 +062	+053 +045
+040 +041	+040 +041	+043 +043	+044 +045	+047 +050	+050 +053	+055 +056	+056 +056	+060 +060	+062 +061	+063 +063	+065 +065
+041 +042	+042 +043	+043 +046	+047 +048	+051 +054	+054 +057	+059 +062	+064 +065	+067 +067	+068 +069	+071 +070	+070 +061
+040 +044	+044 +043	+045 +048	+048 +051	+054 +054	+057 +057	+063 +067	+068 +069	+071 +070	+073 +074	+076 +075	+075 +065
+038 +044	+044 +042	+045 +048	+050 +051	+056 +056	+063 +063	+065 +065	+069 +071	+072 +075	+073 +074	+076 +075	+075 +058
+037 +043	+042 +042	+044 +048	+050 +051	+057 +057	+060 +060	+064 +064	+066 +066	+070 +073	+074 +077	+078 +077	+078 +061
+037 +042	+042 +042	+044 +049	+049 +052	+060 +060	+065 +065	+068 +068	+073 +075	+076 +078	+077 +079	+082 +080	+080 +070
+029 +040	+040 +038	+042 +042	+042 +049	+052 +052	+052 +052	+054 +054	+056 +056	+060 +060	+063 +063	+067 +067	+070 +063
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	C 200
+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 200

190473

190473

200473

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	343 341	350 336	351 341	341 344	342 347	345 352	348 343	342 342	332 327	333 344	327 328	335 344
D 80	345 339	350 337	354 345	343 343	341 344	342 347	338 337	325 327	325 325	337 337	340 340	334 334
D 10	343 335	346 336	351 335	339 338	336 336	335 335	321 302	313 303	300 314	320 320	304 304	321 321
F 200	117 127	117 118	117 113	118 103	116 116	110 105	095 089	093 089	084 085	095 081	076 067	069 072
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	110 114	110 098	107 091	102 090	094 088	086 077	073 065	070 070	073 068	080 062	071 063	042 063
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	035 035	039 037	037 036	036 035	035 035	037 037	036 036	035 035	032 032	030 039	029 040	030 035
F 2	xxx xxx											
T 200	+043 +045	+048 +048	+048 +047	+047 +044	+040 +040	+038 +038	+037 +037	+036 +036	+038 +038	+034 +034	+032 +031	+038 +038
T 160	+047 +049	+052 +052	+051 +048	+048 +044	+043 +043	+040 +040	+041 +041	+039 +039	+040 +040	+035 +035	+033 +033	+036 +036
T 120	+031 +053	+053 +053	+055 +055	+054 +054	+051 +051	+047 +047	+043 +043	+042 +042	+040 +040	+039 +039	+037 +037	+040 +039
T 80	+035 +057	+057 +057	+059 +059	+055 +055	+052 +052	+049 +049	+047 +047	+045 +045	+042 +042	+037 +037	+035 +035	+036 +036
T 40	+030 +061	+061 +062	+062 +063	+058 +058	+056 +056	+054 +054	+050 +050	+048 +048	+046 +046	+041 +041	+037 +037	+037 +037
T 20	+020 +062	+063 +064	+063 +065	+059 +060	+056 +056	+050 +050	+048 +048	+043 +043	+039 +039	+037 +037	+037 +037	+037 +037
T 9	+064 +065	+065 +065	+064 +066	+066 +066	+065 +065	+064 +064	+063 +063	+062 +062	+061 +061	+060 +060	+059 +059	+058 +058
T 2	+066 +066	+067 +067	+067 +059	+059 +059	+052 +052	+046 +046	+044 +044	+031 +031	+030 +030	+028 +028	+027 +027	+034 +034
C 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
C 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

200473

200473

03-04	04-05	05-06	06-07	07-08	08-09	09-10</th
-------	-------	-------	-------	-------	-------	-----------



240473																									
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15														
03/ 04	04/ 05	05/ 06	06/ 07	07/ 08	08/ 09	09/ 10	10/ 11	11/ 12	12/ 13	13/ 14	14/ 15														
013	027	043	050	053	066	073	071	070	069	070	065	066	069	071	070	067	069	059	061	056	055	061	055	D 200	
022	029	027	030	032	049	057	056	056	057	062	061	057	059	060	062	058	067	054	050	048	049	058	049	D 10	
J 6/ 0	071	179	187	093	098	102	102	082	072	063	075	075	083	084	079	082	087	086	096	100	110	110	F 200		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0		
070	177	176	063	066	067	061	059	060	063	065	071	074	083	079	077	078	081	080	087	096	106	104	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0		
037	037	139	032	033	035	042	042	044	049	049	053	060	059	060	061	059	062	065	060	067	073	081	080	F 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2	
+0/ +074	+076	+071	+066	+068	+073	+069	+065	+068	+078	+086	+093	+099	+105	+108	+109	+111	+113	+116	+118	+115	+112	+107	T 200		
+076	+0/ 5	+077	+070	+063	+066	+067	+065	+068	+072	+082	+092	+098	+104	+110	+113	+114	+116	+118	+123	+120	+116	+111	T 160		
+078	+0/ 6	+076	+072	+067	+067	+067	+067	+071	+076	+086	+096	+102	+108	+114	+117	+118	+120	+122	+126	+127	+124	+120	+115	T 120	
+077	+0/ 6	+074	+070	+067	+067	+067	+068	+073	+079	+089	+098	+104	+111	+117	+120	+121	+123	+126	+129	+131	+128	+124	+119	T 80	
+075	+073	+070	+067	+065	+067	+067	+070	+071	+077	+083	+094	+103	+109	+116	+122	+125	+126	+129	+131	+134	+136	+133	+130	+124	T 40
+075	+072	+069	+066	+064	+068	+072	+073	+080	+085	+096	+106	+113	+120	+124	+128	+129	+132	+135	+137	+139	+136	+133	+127	T 20	
+075	+071	+069	+066	+064	+069	+073	+074	+081	+087	+099	+107	+114	+121	+128	+131	+132	+134	+137	+140	+141	+139	+134	+129	T 9	
+0/ 4	+071	+068	+064	+063	+069	+073	+076	+084	+090	+103	+111	+118	+126	+132	+135	+137	+138	+141	+144	+146	+143	+138	+132	T 2	
-000	-000	-000	-000	-000	-000	+000	+000	+000	-000	-000	XXX	-000	XXX	-000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200		
-000	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	-000	+001	+000	-000	-000	+000	+000	+000	+000	+000	+000	-000	CT 20		

240473

240473

250473

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	056	066	061	063	064	051	064	062	063	057	057	061
D 80	057	069	063	065	066	061	064	062	063	055	053	058
D 10	050	062	056	056	058	054	054	054	045	043	048	045
F200	118	128	132	122	133	140	133	124	118	114	113	128
F160Z0	xxx											
F120Z0	xxx											
F 80	113	119	121	113	119	123	119	103	096	089	095	094
F 40Z0	xxx											
F 20Z0	xxx											
F 10	060	081	085	079	079	077	079	058	051	044	051	057
F 2	xxx											
T200	+098	+090	+087	+088	+087	+082	+079	+077	+076	+073	+071	+070
T160	+102	+094	+091	+092	+090	+086	+083	+081	+080	+078	+076	+074
T120	+106	+098	+095	+095	+094	+090	+087	+084	+083	+081	+079	+076
T 80	+111	+103	+099	+099	+098	+093	+090	+087	+085	+084	+081	+079
T 40	+116	+108	+103	+103	+102	+096	+093	+088	+086	+083	+082	+080
T 20	+118	+110	+106	+105	+103	+097	+094	+089	+085	+082	+082	+080
T 9	+120	+112	+107	+106	+104	+097	+095	+088	+084	+081	+081	+080
T 2	+123	+114	+108	+107	+104	+096	+093	+085	+085	+081	+077	+078
C 200	-000	-000	+005	-000	-000	-001	-000	-001	-000	-000	-001	-001
C 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

250473

250473

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
068	062	063	069	074	075	078	077	073	073	074	070
060	056	053	059	062	065	065	067	065	068	070	061
041	035	038	046	049	053	053	058	057	061	063	062
11/	116	114	126	125	126	128	086	078	072	067	071
xxx											
xxx											
060	080	082	082	082	076	066	068	067	066	067	069
xxx											
xxx											
039	040	045	041	040	043	048	046	054	050	056	057
xxx											
*039	+035	+032	+034	+031	+033	+046	+047	+045	+052	+060	+067
+040	+036	+032	+031	+030	+029	+037	+043	+048	+056	+064	+072
+042	+032	+034	+031	+031	+029	+034	+042	+051	+060	+068	+076
+044	+040	+035	+032	+031	+030	+035	+034	+044	+053	+062	+070
+043	+039	+035	+031	+031	+032	+038	+047	+058	+067	+075	+084
+041	+036	+032	+030	+029	+033	+040	+050	+060	+069	+078	+087
+040	+034	+032	+029	+028	+033	+041	+051	+061	+071	+080	+089
+036	+030	+026	+026	+032	+032	+041	+052	+064	+075	+084	+094
-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

250473

250473

260473

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	027	016	023	016	015	021	020	022	017	016	019	024
D 80	026	011	019	013	013	018	026	020	030	031	030	023
D 10	020	007	013	009	008	028	012	017	022	025	021	016
F200	164	077	070	068	071	070	075	078	088	081	078	060
F160Z0	xxx											
F120Z0	xxx											
F 80	001	079	070	068	067	068	078	082	072	073	066	057
F 40Z0	xxx											
F 20Z0	xxx											
F 10	047	057	046	047	040	034	036	039	029	027	024	028
F 2	xxx											
T200	+110	+105	+104	+102	+100	+100	+097	+094	+091	+084	+076	+076
T160	+114	+110	+109	+107	+104	+103	+100	+096	+091	+085	+078	+075
T120	+118	+113	+112	+110	+107	+105	+102	+097	+093	+088	+082	+076
T 80	+121	+117	+116	+113	+110	+107	+103	+099	+096	+091	+084	+079
T 40	+126	+122	+120	+117	+113	+109	+103	+097	+094	+089	+081	+077
T 20	+128	+124	+123	+119	+115	+109	+101	+093	+086	+079	+074	+072
T 9	+130	+126	+125	+120	+116	+109	+100	+092	+083	+075	+070	+069
T 2	+133	+130	+127	+122	+116	+108	+098	+088	+073	+064	+059	+062
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000

260473	260473	260473	260473	260473	260473	260473	260473	260473	260473	260473	260473	260473
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
041	080	156	075	341	298	xxx	184	249	213	279	351	032
055	046	153	106	023	250	357	168	262	199	064	332	033
058	001	160	087	044	269	160	265	133	265	268	339	328
016	013	015	007	011	005	xxx	010	011	011	009	009	007
xxx												
xxx												
017	014	018	014	009	008	007	014	011	011	008	007	007
xxx												
xxx												
017	010	015	015	011	010	007	012	011	011	009	008	007
xxx												
+026	+029	+029	+024	+024	+024	+025	+025	+027	+027	+030	+034	+039
+029	+028	+028	+026	+025	+027	+028	+030	+032	+034	+041	+049	+057
+032	+031	+032	+030	+029	+028	+030	+030	+032	+034	+044	+052	+060
+034	+033	+034	+033	+031	+030	+032	+032	+035	+035	+041	+047	+055
+037	+036	+037	+035	+034	+033	+034	+035	+037	+037	+040	+044	+050
+038	+037	+038	+036	+035	+034	+035	+036	+036	+039	+043	+051	+058
+039	+037	+038	+036	+035	+035	+036	+037	+038	+042	+043	+047	+052
+039	+038	+038	+036	+036	+036	+038	+038	+040	+043	+045	+049	+054
+0												

260473												260473												CABA UW			
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03			
D 200	195	309	312	320	283	167	182	208	215	207	208	198	191	186	187	183	184	181	183	184	187	192	194	196			
D 80	236	282	316	334	003	079	124	136	159	178	194	181	175	174	175	176	175	179	185	188	192	193					
D 10	002	276	312	336	016	043	086	103	159	166	153	149	156	163	169	167	176	172	168	174	178	176	175	178			
F 200	012	012	013	009	005	005	011	011	015	022	022	033	042	053	060	069	074	083	093	101	112	119	122	126			
F 160Z0	>xx	xxx	xxx	xxx	xxx	xxx	<xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx			
F 120Z0	>xx	xxx	xxx	xxx	xxx	xxx	<xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx			
F 80	(10	009	014	012	008	005	001	001	013	022	019	023	038	052	066	075	075	083	094	107	112	118	112	111			
F 40Z0	>xx	xxx	xxx	xxx	xxx	xxx	<xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx			
F 20Z0	>xx	xxx	xxx	xxx	xxx	xxx	<xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx			
F 10	009	010	014	012	010	008	005	004	007	013	010	019	027	032	031	019	023	031	033	037	041	040	034				
F 2	>xx	xxx	xxx	xxx	xxx	xxx	<xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx			
T 200	+100	+102	+103	+103	+103	+104	+104	+104	+103	+105	+105	+104	+104	+104	+104	+104	+104	+104	+104	+105	+105	+105	+105	+104			
T 160	+104	+106	+107	+107	+106	+107	+107	+107	+106	+107	+108	+107	+107	+108	+107	+108	+107	+107	+107	+106	+108	+107	+107	+106			
T 120	+108	+110	+111	+111	+110	+110	+110	+110	+110	+110	+110	+109	+109	+109	+109	+109	+109	+109	+109	+109	+109	+109	+108	+107			
T 80	+112	+113	+114	+115	+113	+114	+113	+114	+112	+111	+111	+110	+112	+110	+111	+111	+110	+110	+108	+104	+106	+104	+102	+098	+095		
T 40	+116	+117	+118	+119	+117	+117	+117	+116	+114	+113	+113	+110	+108	+111	+108	+108	+102	+092	+088	+091	+084	+077	+075	+071	+069		
T 20	+117	+119	+120	+120	+119	+118	+118	+117	+113	+110	+105	+103	+100	+096	+089	+084	+077	+075	+076	+071	+067	+065	+062	+060			
T 9	+112	+119	+120	+121	+120	+119	+119	+116	+108	+102	+094	+094	+088	+085	+081	+076	+067	+069	+070	+066	+062	+061	+059	+055			
T 2	+121	+122	+121	+119	+117	+117	+107	+088	+078	+062	+074	+069	+061	+058	+056	+050	+046	+047	+049	+050	+052	+051	+044				
C 200	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000			
C 1 20	-001	-100	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000			

2/0473												270473												
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
201	203	218	232	244	252	259	262	256	255	253	255	259	268	276	285	291	310	307	312	313	312	312	D 200	
196	199	206	209	210	214	219	225	234	238	248	254	249	259	273	280	288	293	311	314	315	315	316	D 80	
177	183	188	186	189	200	214	230	242	255	257	252	261	277	282	288	293	316	314	314	315	316	317	D 10	
128	131	131	127	126	127	122	105	086	067	057	045	052	055	052	051	052	046	047	048	052	053	054	055	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
104	106	094	079	090	076	066	055	053	053	044	051	053	050	050	053	044	047	049	050	055	055	055	F 80	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
031	029	131	032	032	035	036	041	041	046	041	043	046	045	038	041	044	047	050	048	047	047	047	F 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2	
+104	+104	+103	+104	+103	+104	+102	+087	+084	+087	+093	+101	+106	+107	+109	+110	+111	+111	+110	+110	+108	+107	+106	T 200	
+106	+104	+105	+103	+098	+091	+089	+085	+087	+092	+098	+106	+111	+113	+114	+115	+115	+115	+114	+114	+112	+111	+110	T 160	
+100	+100	+100	+098	+098	+092	+087	+084	+084	+089	+094	+101	+110	+115	+116	+117	+119	+120	+118	+119	+118	+115	+114	T 120	
+087	+087	+084	+085	+083	+088	+078	+079	+084	+092	+098	+105	+113	+118	+120	+121	+123	+124	+124	+123	+122	+122	+119	+117	
+086	+067	+056	+065	+064	+065	+067	+076	+088	+096	+102	+109	+117	+123	+124	+124	+128	+129	+127	+127	+127	+124	+122	T 40	
+010	+058	+058	+057	+058	+060	+066	+072	+090	+098	+104	+111	+120	+125	+127	+128	+131	+130	+130	+130	+127	+126	+125	T 20	
+023	+053	+153	+053	+053	+054	+054	+058	+078	+091	+100	+106	+113	+122	+128	+130	+132	+133	+131	+131	+130	+128	+127	+125	T 9
+043	+058	+037	+040	+045	+055	+065	+079	+090	+092	+103	+110	+117	+127	+133	+135	+138	+138	+138	+137	+136	+134	+133	+130	T 2
-000	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
-000	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

271473												270473												CABA UW			
GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03			
D 200	314	319	322	325	329	333	347	351	358	021	041	059	064	064	069	075	079	080	081	088	082	091	096	086			



300473

300473

010573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	142	143	157	168	176	185	189	186	189	195	200	200
D 80	140	132	148	155	154	177	151	170	166	164	175	182
D 10	125	130	141	151	157	171	178	157	154	158	148	159
F 200	131	144	155	147	142	137	119	124	142	162	183	197
F 160ZU	xxx											
F 120ZU	xxx											
F 80	093	099	118	107	100	099	078	079	094	096	105	119
F 40ZU	xxx											
F 20ZU	xxx											
F 10	054	058	064	067	059	058	038	041	049	049	061	070
F 2	xxx											
T 200	+098	+097	+117	+122	+118	+144	+133	+118	+142	+144	+163	+167
T 160	+113	+114	+118	+124	+127	+146	+138	+124	+142	+145	+160	+163
T 120	+104	+112	+120	+131	+135	+148	+139	+122	+144	+152	+158	+159
T 80	+123	+122	+123	+127	+137	+149	+139	+130	+141	+139	+156	+155
T 40	+108	+108	+123	+128	+125	+144	+145	+122	+140	+147	+149	+149
T 20	+110	+109	+124	+129	+126	+144	+147	+137	+127	+135	+146	+146
T 2	+111	+110	+125	+130	+126	+146	+145	+132	+134	+126	+124	+147
C 200	-017	-016	-002	-022	-001	+003	-012	-003	-015	+000	-001	-000
C 20	-010	-016	-002	-000	-014	-004	+008	+005	+006	-011	-010	-000

010573

010573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
251	253	251	249	250	249	249	243	244	247	258	271
250	248	245	240	244	245	243	239	239	251	271	264
254	249	246	243	247	248	245	243	241	241	254	272
116	117	111	115	106	109	103	122	097	078	080	067
xxx											
xxx											
U 95	087	088	095	067	090	084	021	083	067	069	073
xxx											
xxx											
U 65	060	060	067	065	067	068	072	165	051	053	043
xxx											
+116	+103	+098	+090	+090	+084	+085	+075	+174	+074	+074	+071
+118	+106	+098	+092	+097	+084	+084	+080	+178	+078	+078	+074
+120	+109	+102	+095	+091	+087	+084	+082	+182	+082	+082	+078
+123	+112	+106	+099	+091	+088	+086	+086	+135	+082	+082	+081
+126	+115	+109	+102	+098	+095	+091	+089	+139	+085	+085	+082
+127	+116	+109	+103	+099	+096	+093	+091	+092	+091	+098	+088
+126	+115	+109	+102	+100	+097	+094	+092	+092	+092	+092	+088
+124	+114	+107	+101	+099	+097	+094	+092	+093	+093	+092	+089
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

010573

010573

020573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
U 200	237	235	231	246	243	248	305	346	344	006	027	051
D 80	228	223	221	238	228	223	268	349	355	007	024	036
D 10	234	242	249	263	253	249	274	022	031	070	072	103
F 200	021	036	036	036	027	032	026	025	019	022	020	018
F 160ZU	xxx											
F 120ZU	xxx											
F 80	020	034	035	030	026	035	021	021	019	021	015	012
F 40ZU	xxx											
F 20ZU	xxx											
F 10	019	027	030	030	021	026	015	010	006	008	006	003
F 2	xxx											
T 200	+049	+057	+057	+057	+051	+062	+063	+064	+065	+064	+064	+064
T 160	+052	+060	+056	+054	+065	+065	+067	+068	+068	+068	+067	+067
T 120	+063	+064	+064	+065	+065	+068	+070	+072	+072	+071	+071	+070
T 80	+055	+056	+061	+068	+072	+072	+073	+075	+075	+074	+074	+072
T 40	+070	+072	+072	+072	+076	+075	+076	+077	+077	+076	+076	+072
T 20	+069	+074	+075	+074	+078	+076	+077	+077	+078	+076	+076	+077
T 9	+073	+075	+076	+075	+078	+078	+079	+078	+078	+076	+075	+075
T 2	+063	+066	+065	+070	+074	+077	+077	+074	+074	+069	+067	+067
C 200	+002	+008	+003	+001	+000	+000	+000	+000	+000	+000	+000	+000
CT 20	+010	+011	+002	+004	+000	+000	+000	+000	+000	+000	+000	+000

020573

020573

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
U 200	036	051	047	048	051	055	058	057	062	069	070	065
U 64	049	040	040	044	048	050	056	054	055	068	070	064
U 103	060	056	047	052	052	062	071	073	069	086	084	095
U 55	059	069	074	063	091	094	088	076	063	068	080	080
xxx												
xxx												
U 45	052	057	074	080	080	065	061	061	065	077	079	090
xxx												
U 16	016	018	022	024	029	030	042	051	047	058	056	055
xxx												
+001	+061	+061	+061	+060	+059	+059	+058	+058	+057	+070	+071	+072
+002	+053	+063	+062	+063	+062	+061	+059	+062	+062	+075	+076	+076
+003	+064	+063	+064	+065	+064	+060	+065	+066	+070	+089	+084	+085
+002	+062	+063	+061	+065	+063	+068	+069	+082	+084	+087	+090	+091
+006	+056	+053	+054	+054	+052	+058	+067	+073	+074	+086	+088	+090
+038	+034	+028	+031	+032	+043	+058	+058	+076	+077	+089	+090	+091
+034	+025	+017	+022	+029	+040	+051	+056	+061	+078	+093	+096	+099
+029	+020	+012	+017	+041	+053	+060	+066	+072	+094	+095	+098	+100
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-001	-001	-000	-000	-002	-004	-004	-005	-000	-000	-000	-000

CT 200

CT 20

020573

020573

030573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	076 077	076 074	075 074	076 074	071 071	075 072	076 074	075 077	076 075	079 070	073 079	074 074
D 80	076 076	076 077	075 075	075 074	072 071	074 071	073 074	071 069	073 070	071 062	066 073	066 068
D 10	097 099	099 099	092 090	095 087	086 085	093 086	082 083	079 078	075 075	068 077	083 077	077 082
F 200	083 074	074 069	073 079	073 064	070 071	066 063	064 057	052 046	054 041	033 033	040 042	039 043
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	077 065	065 069	070 068	054 057	061 059	054 055	043 038	038 033	030 034	035 032	036 039	xxx xxx
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	052 050	048 046	051 045	046 040	036 039	034 035	035 027	023 020	020 020	018 019	021 020	020 022
F 2	xxx xxx											
T 200	+050 +078	+077 +076	+073 +071	+069 +067	+067 +065	+063 +062	+060 +058	+057 +056	+055 +055	+054 +054	+055 +055	+054 +055
T 160	+085 +083	+081 +080	+078 +075	+073 +071	+071 +069	+067 +065	+063 +062	+061 +060	+059 +059	+058 +058	+057 +057	+057 +058
T 120	+082 +087	+085 +084	+081 +079	+076 +075	+074 +072	+071 +069	+067 +066	+064 +063	+062 +062	+061 +061	+061 +061	+060 +061
T 80	+092 +090	+089 +087	+085 +083	+080 +079	+078 +076	+074 +073	+070 +069	+068 +066	+066 +066	+065 +065	+064 +064	+064 +064
T 40	+097 +095	+094 +091	+089 +087	+084 +082	+081 +079	+078 +076	+074 +073	+070 +069	+069 +069	+069 +068	+068 +067	+068 +068
T 20	+099 +097	+096 +094	+091 +089	+086 +084	+083 +081	+080 +078	+076 +074	+072 +070	+070 +070	+071 +070	+069 +069	+070 +070
T 9	+101 +098	+097 +094	+092 +089	+087 +085	+083 +082	+080 +079	+076 +075	+072 +071	+071 +071	+071 +071	+070 +070	+070 +070
T 2	+102 +098	+098 +095	+093 +089	+087 +084	+081 +080	+080 +078	+076 +074	+072 +071	+071 +071	+070 +070	+070 +070	+070 +070
C:200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

030573

030573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
076 085	093 092	099 113	095 088	086 089	078 093	087 088	099 100	101 101	101 101	107 105	098 095
067 073	077 074	077 080	075 085	073 071	070 085	085 084	089 097	101 104	104 109	111 111	102 109
082 095	093 082	084 079	079 108	091 088	085 107	113 107	110 122	129 124	134 134	127 138	130 125
041 046	035 035	040 029	031 033	025 027	032 032	035 039	040 040	037 040	042 047	052 055	061 061
xxx xxx											
xxx xxx											
037 027	025 029	030 025	025 029	027 029	033 028	033 036	040 038	037 034	039 049	050 051	059 057
xxx xxx											
xxx xxx											
022 016	015 020	022 018	020 021	022 025	030 025	028 031	032 033	033 035	042 043	048 045	045 045
xxx xxx											
+055 +056	+057 +057	+057 +057	+058 +058	+058 +058	+059 +061	+064 +064	+067 +070	+076 +083	+084 +094	+101 +105	+112 +119
+058 +060	+060 +059	+060 +061	+060 +061	+062 +064	+068 +072	+077 +082	+087 +092	+098 +105	+109 +116	+124 +129	+137 +143
+061 +061	+061 +061	+062 +064	+063 +064	+064 +066	+068 +072	+076 +081	+086 +092	+096 +103	+110 +114	+121 +129	+142 +147
+064 +065	+065 +064	+064 +066	+066 +066	+067 +071	+072 +076	+080 +085	+089 +089	+094 +100	+106 +114	+118 +124	+137 +144
+068 +068	+068 +067	+067 +067	+068 +069	+071 +075	+076 +080	+085 +089	+094 +094	+104 +110	+118 +122	+129 +136	+142 +149
+069 +070	+070 +069	+069 +070	+071 +071	+073 +077	+079 +082	+087 +092	+096 +102	+107 +107	+113 +121	+125 +132	+145 +152
+070 +070	+071 +071	+071 +071	+072 +072	+075 +078	+080 +084	+089 +094	+098 +105	+109 +116	+122 +127	+135 +141	+148 +155
+070 +071	+071 +071	+071 +071	+072 +072	+074 +076	+080 +083	+087 +091	+097 +097	+102 +108	+112 +119	+126 +131	+139 +145
-000 -000	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

030573

030573

040573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	097 096	096 092	091 090	093 093	092 073	081 096	097 091	113 104	089 106	109 110	143 175	173 180
D 80	091 095	090 090	086 084	079 082	081 075	060 087	091 086	086 076	046 051	074 082	110 134	142 148
D 10	113 122	116 106	106 103	099 099	103 102	080 355	062 110	120 114	102 093	036 024	081 112	132 151
F 200	065 069	073 084	096 111	116 123	112 074	086 138	120 135	089 064	059 051	060 086	094 095	080 068
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	061 062	062 063	072 082	081 081	067 067	042 079	125 112	111 074	068 053	031 054	072 074	082 081
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	048 046	042 037	037 041	040 035	035 026	036 052	067 057	054 054	031 027	020 021	027 029	036 041
F 2	xxx xxx											
T 200	+142 +148	+151 +153	+155 +157	+160 +160	+157 +157	+154 +154	+151 +151	+157 +157	+159 +159	+157 +157	+153 +157	+157 +167
T 160	+147 +152	+155 +156	+157 +158	+160 +160	+153 +156	+146 +146	+142 +142	+173 +173	+160 +155	+161 +161	+140 +140	+149 +149
T 120	+152 +157	+159 +160	+160 +159	+160 +153	+146 +146	+148 +144	+144 +148	+168 +168	+160 +150	+156 +156	+146 +146	+154 +154
T 80	+154 +160	+162 +162	+163 +162	+161 +161	+154 +154	+140 +140	+142 +142	+144 +144	+157 +157	+154 +154	+146 +146	+150 +150
T 40	+159 +165	+166 +166	+166 +165	+165 +165	+162 +162	+155 +155	+153 +153	+148 +148	+140 +140	+144 +144	+137 +137	+142 +142
T 20	+162 +167	+167 +167	+166 +163	+163 +162	+162 +162	+155 +155	+150 +150	+142 +142	+137 +137	+136 +136	+132 +132	+133 +133
T 9	+164 +169	+169 +168	+168 +166	+166 +165	+161 +154	+151 +152	+145 +145	+142 +142	+143 +143	+135 +135	+134 +134	+131 +131
T 2	+167 +171	+169 +169	+168 +165	+165 +159	+159 +152	+147 +147	+148 +144	+135 +135	+146 +146	+132 +132	+133 +131	+131 +131
CT 200	+000 +000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 +000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

040573

040573

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02
-----	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

040573

040573

25053

SABAH

050-73

050573

050573

050571

262571

SABA

980673

060573

060573

070573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	210	207	206	203	199	208	206	210	199	196	197	192
D 80	205	202	202	199	196	204	202	208	195	194	194	186
D 10	210	207	209	203	190	207	206	213	195	191	192	181
F 200	126	135	129	130	142	145	123	140	144	154	149	132
F 160Z0	xxx											
F 120Z0	xxx											
F 80	110	124	113	110	113	126	098	116	101	118	112	096
F 40Z0	xxx											
F 20Z0	xxx											
F 10	079	086	079	079	077	083	062	073	061	078	074	061
F 2	xxx											
T 200	+116	+119	+122	+123	+124	+124	+113	+090	+090	+104	+105	+105
T 160	+119	+123	+126	+127	+128	+128	+120	+095	+092	+110	+108	+108
T 120	+123	+127	+129	+131	+131	+132	+126	+099	+098	+113	+111	+111
T 80	+127	+131	+133	+135	+134	+135	+130	+100	+101	+117	+114	+113
T 40	+131	+135	+136	+138	+138	+138	+133	+102	+094	+119	+117	+116
T 20	+133	+137	+138	+140	+139	+139	+134	+102	+100	+120	+118	+117
T 9	+135	+138	+138	+140	+139	+139	+134	+104	+096	+120	+117	+116
T 2	+134	+139	+137	+140	+138	+138	+132	+103	+094	+105	+116	+114
C 200	-000	-000	-000	-000	-000	-000	-003	+000	-017	-002	-000	-000
C 20	-000	-000	-000	-000	-000	-000	-000	+001	-012	-000	-000	-000
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-012	-002	-000
C 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

070573

070573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
240	241	238	228	231	229	222	229	227	225	221	222
233	238	232	222	218	218	221	217	221	225	216	218
234	241	231	226	207	217	223	223	224	232	230	224
069	089	087	072	066	069	067	056	050	046	046	042
xxx											
xxx											
077	070	067	056	043	048	053	048	045	042	043	052
xxx											
xxx											
054	046	043	032	022	030	039	038	042	041	039	038
xxx											
+U79	+078	+078	+077	+076	+076	+076	+076	+079	+080	+082	+083
+060	+040	+081	+080	+079	+079	+080	+081	+083	+084	+086	+088
+085	+043	+084	+087	+082	+083	+084	+085	+087	+088	+089	+090
+039	+040	+087	+086	+085	+086	+087	+088	+091	+092	+094	+096
+040	+070	+070	+070	+070	+070	+070	+070	+070	+070	+070	+070
+081	+089	+089	+087	+088	+091	+093	+095	+096	+098	+099	+100
+081	+089	+089	+087	+088	+091	+093	+095	+097	+098	+100	+100
+081	+077	+078	+079	+086	+091	+093	+095	+101	+102	+102	+103
+007	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
-047	-006	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+001	-000	+000	+000	-000	-000	-000	-000	-000	-000	-000

070573

070573

080573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	287	291	282	268	181	193	232	308	012	026	179	181
D 80	290	280	260	270	164	159	146	113	124	151	169	179
D 10	286	270	290	280	166	157	115	064	088	151	159	175
F 200	027	019	012	017	048	043	017	012	010	011	055	063
F 160Z0	xxx											
F 120Z0	xxx											
F 80	024	018	012	015	038	042	024	012	007	016	058	060
F 40Z0	xxx											
F 20Z0	xxx											
F 10	022	017	011	014	029	026	014	012	012	013	031	036
F 2	xxx											
T 200	+104	+105	+105	+103	+091	+092	+094	+098	+097	+096	+085	+085
T 160	+108	+109	+109	+107	+092	+093	+094	+099	+100	+097	+087	+082
T 120	+112	+112	+112	+111	+091	+094	+096	+099	+099	+097	+090	+084
T 80	+116	+116	+116	+114	+093	+095	+097	+100	+099	+098	+084	+082
T 40	+121	+121	+120	+118	+096	+099	+100	+095	+094	+089	+089	+085
T 20	+124	+121	+122	+120	+098	+097	+099	+098	+093	+084	+080	+082
T 9	+124	+122	+122	+120	+099	+097	+098	+094	+092	+089	+080	+085
T 2	+129	+123	+121	+118	+098	+096	+094	+091	+083	+078	+084	+085
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+001	-000	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000

080573

080573

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
337	333	329	325	318	299	284	274	252	236	229	237	258
330	338	345	346	322	305	278	269	253	233	225	234	257
301	307	304	298	277	261	270	271	262	242	228	239	261
U79	069	061	050	046	038	035	036	031	030	042	050	061
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
U66	054	051	044	038	029	029	023	027	029	044	047	056
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
000	001	017	018	018	020	021	026	027	037	039	042	066
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+069	+073	+075	+073	+071	+070	+067	+075	+081	+085	+090	+091	+093
+072	+073	+076	+073	+074	+072	+075	+082	+089	+093	+098	+096	+098
+072	+073	+076	+073	+074	+072	+075	+082	+089	+093	+098	+096	+098
+067	+070	+075	+073	+074	+073	+077	+085	+093	+097	+101	+100	+101
+061	+061	+064	+064	+068	+071	+074	+081	+089	+097	+101	+103	+109
+057	+056	+057	+059	+064	+064	+065	+083	+092	+099	+103	+108	+113
+054	+052	+053	+055	+051	+064	+076	+084	+093	+102	+106	+110	+113
+045	+041	+035	+042	+064	+078	+088	+098	+106	+110	+113	+109	+116
-000	-000	-000	-000	-001</td								

080573

080573

090573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	305 309	311 308	308 309	308 307	305 303	307 307	299 292	282 272	258 251	242 244	240 240	237 232
D 80	303 307	305 305	307 307	305 303	308 308	311 308	301 292	277 264	255 256	251 249	251 243	234 235
D 10	303 309	306 306	306 308	311 308	305 301	292 277	264 255	251 256	249 251	234 235	226 228	230 229
F 200	108 106	102 101	092 085	082 078	065 058	061 057	062 074	070 066	071 073	070 071	069 071	077 077
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	104 103	097 097	085 082	074 065	056 053	059 050	059 067	058 058	060 064	057 057	056 057	066 068
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	085 077	077 072	061 059	054 044	032 028	028 028	032 037	030 032	037 037	039 037	036 037	038 037
F 2	xxx xxx											
T 200	+070 +074	+073 +074	+076 +074	+073 +071	+071 +070	+068 +068	+068 +068	+070 +072	+072 +071	+074 +074	+076 +078	+078 +082
T 160	+084 +082	+082 +080	+078 +076	+075 +075	+073 +072	+071 +071	+071 +073	+075 +075	+075 +074	+077 +078	+079 +079	+080 +083
T 120	+087 +085	+086 +084	+084 +081	+080 +079	+078 +076	+075 +075	+075 +075	+076 +077	+078 +077	+079 +079	+081 +082	+082 +083
T 80	+091 +090	+090 +088	+085 +084	+082 +082	+080 +080	+079 +078	+077 +077	+079 +079	+080 +080	+082 +083	+084 +084	+085 +086
T 40	+095 +095	+094 +092	+089 +089	+087 +086	+086 +085	+083 +081	+078 +078	+078 +078	+080 +081	+082 +083	+084 +085	+085 +087
T 20	+099 +097	+096 +094	+091 +089	+088 +086	+084 +084	+080 +076	+078 +079	+081 +081	+083 +083	+084 +085	+086 +086	+085 +086
T 9	+100 +098	+097 +094	+091 +090	+088 +086	+083 +083	+079 +075	+078 +078	+080 +080	+081 +081	+082 +084	+085 +085	+085 +085
T 2	+103 +100	+098 +095	+091 +090	+088 +085	+081 +073	+071 +075	+075 +075	+078 +079	+080 +080	+083 +084	+084 +084	+081 +083
C-200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
C 20	-000 +000	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

090573

090573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
222 242	243 250	244 245	245 265	282 286	286 289	286 284	286 288	289 286	286 282	273 272	265 266
235 227	231 233	233 232	252 250	269 278	286 284	282 285	290 290	284 279	271 268	261 264	263 263
225 226	232 229	227 227	250 266	280 288	284 283	289 295	293 286	279 276	273 262	267 267	267 273
076 064	081 073	070 071	075 066	063 072	068 072	073 069	075 072	071 071	076 072	071 072	068 070
xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
063 069	063 056	054 056	056 056	052 052	056 066	061 069	072 070	071 069	073 070	069 067	061 065
xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
036 037	037 036	036 036	039 037	036 041	051 049	056 056	056 060	059 061	060 063	058 059	053 053
xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
*065 +082	+079 +081	+078 +078	+080 +079	+079 +077	+074 +074	+077 +088	+092 +095	+100 +104	+105 +106	+107 +107	+111 +112
+087 +085	+082 +083	+079 +089	+082 +082	+088 +077	+089 +093	+097 +100	+103 +103	+107 +112	+114 +114	+115 +115	+117 +118
+089 +087	+085 +086	+084 +084	+087 +087	+088 +089	+093 +093	+097 +100	+103 +103	+107 +112	+114 +114	+115 +115	+119 +120
+089 +088	+088 +086	+083 +086	+086 +087	+088 +093	+096 +101	+104 +104	+107 +111	+116 +116	+118 +118	+119 +119	+122 +124
+088 +088	+080 +089	+091 +089	+087 +086	+086 +090	+086 +086	+091 +101	+105 +109	+112 +116	+120 +120	+123 +123	+124 +126
+087 +088	+092 +092	+090 +090	+094 +094	+098 +098	+099 +099	+103 +103	+107 +112	+115 +119	+123 +123	+125 +125	+128 +129
+066 +037	+037 +037	+092 +092	+090 +090	+091 +091	+095 +095	+099 +105	+109 +109	+116 +120	+120 +120	+125 +125	+129 +130
+085 +086	+086 +086	+091 +091	+090 +090	+093 +093	+094 +094	+103 +103	+109 +113	+116 +120	+125 +125	+127 +127	+126 +130
*-J00 -000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
*-C 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
*-C 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

090573

090573

100573

CABA UW

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	274 273	261 251	239 238	227 233	244 237	228 221	222 224	224 222	222 222	227 227	225 225	227 227
D 80	275 276	266 266	250 254	232 232	222 228	230 225	217 213	213 215	216 216	219 215	216 216	221 221
D 10	276 280	270 270	256 256	238 238	221 220	231 221	213 212	212 220	223 222	219 220	226 226	222 222
F 200	073 076	060 063	061 055	056 056	056 056	112 097	093 104	120 119	114 121	121 117	114 118	127 130
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	069 074	059 060	060 060	055 045	076 076	092 065	060 082	094 094	094 094	095 095	097 097	101 101
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	053 059	044 048	040 047	040 027	052 052	063 036	030 040	060 065	067 067	064 065	069 067	071 080
F 2	xxx xxx											
T 200	+115 +114	+110 +110	+112 +112	+113 +101	+079 +079	+080 +080	+096 +094	+090 +090	+087 +087	+084 +083	+083 +083	+081 +078
T 160	+119 +118	+114 +114	+117 +116	+116 +116	+106 +105	+082 +082	+083 +083	+093 +093	+097 +097	+086 +086	+085 +085	+080 +079
T 120	+123 +122	+118 +118	+121 +120	+119 +120	+111 +111	+085 +085	+078 +078	+088 +088	+102 +102	+097 +097	+094 +094	+081 +081
T 80	+127 +126	+121 +121	+123 +123	+123 +123	+111 +111	+087 +087	+084 +084	+094 +094	+095 +095	+093 +093	+092 +092	+086 +083
T 40	+131 +130	+130 +129	+127 +126	+126 +126	+116 +116	+093 +093	+085 +085	+095 +095	+105 +105	+101 +101	+098 +098	+096 +096
T 20	+133 +132	+127 +130	+128 +127	+126 +126	+117 +117	+091 +091	+085 +085	+094 +094	+105 +105	+104 +104	+098 +098	+097 +097
T 9	+134 +133	+127 +132	+129 +129	+127 +127	+119 +119	+095 +095	+085 +085	+094 +094	+103 +105	+104 +104	+098 +098	+098 +098
T 2	+135 +133	+128 +128	+128 +128	+123 +123	+117 +117	+095 +095	+086 +086	+094 +094	+102 +102	+098 +098	+097 +097	+095 +095
C 200	-001 -001	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
C 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

100573

100573

03-04	04-05	05-06	06-07	07-08	08-09</
-------	-------	-------	-------	-------	---------



120573												120573												130573			
GNT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03			
D200	251	272	273	271	267	257	245	247	243	243	244	244	244	244	241	237	232	231	229	229	230	234	236	234			
D 80	251	274	274	272	267	259	241	241	236	235	234	238	233	231	231	227	227	221	219	218	218	221	222	223	224		
D 10	265	277	279	278	271	265	246	242	234	215	213	222	219	221	224	227	227	220	219	214	218	224	224	226	224		
F200	076	085	082	090	082	072	077	084	080	087	087	093	109	103	118	125	121	121	123	119	118	120	111	107	106		
F160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F 90	073	079	078	086	075	061	069	073	069	063	071	074	079	083	085	082	083	087	078	081	087	079	077	078			
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
F 10	057	064	060	064	054	042	044	041	035	027	031	037	033	034	035	042	038	044	053	047	043	049					
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX													
T200	+116	+116	+115	+115	+115	+115	+113	+110	+108	+106	+103	+099	+097	+096	+093	+091	+089	+085	+082	+078	+073	+070	+067	+065			
T 60	+122	+121	+120	+119	+119	+120	+117	+113	+118	+108	+105	+101	+101	+098	+097	+094	+093	+091	+087	+083	+080	+076	+073	+069	+068		
T120	+125	+124	+123	+123	+123	+121	+116	+114	+111	+108	+103	+101	+098	+096	+094	+092	+088	+085	+082	+079	+075	+072	+070				
T 80	+129	+129	+127	+127	+126	+124	+119	+116	+113	+109	+104	+103	+099	+096	+092	+091	+090	+086	+084	+081	+078	+074	+073				
T 40	+133	+133	+131	+130	+130	+129	+126	+120	+117	+112	+104	+102	+098	+094	+088	+088	+086	+085	+083	+080	+078	+076	+075				
T 20	+136	+135	+133	+132	+131	+130	+126	+118	+114	+105	+097	+095	+091	+087	+085	+082	+079	+077	+081	+086	+083	+083	+082	+080	+075		
T 2	+142	+140	+137	+133	+131	+128	+117	+103	+087	+082	+080	+077	+075	+072	+071	+067	+074	+082	+079	+080	+080	+077	+073	+073	+073		
C200	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		

140573												130573												CABA UW		
GNT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03		
233	232	231	227	228	229	231	229	224	225	231	234	236	232	233	236	244	241	238	235	238	239	242	248	D200		
222	221	219	215	218	219	224	221	215	218	224	229	231	228	229	231	242	239	237	231	237	236	239	247	D 80		
225	224	225	220	225	222	228	224	222	221	229	233	236	233	235	245	245	242	242	245	243	240	244	254	D 10		
104	093	098	092	093	092	091	087	095	089	101	112	108	102	104	098	107	099	097	106	111	121	105	111	F200		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F160Z0		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F120Z0		
078	074	076	073	073	074	079	087	084	092	106	101	091	095	088	095	087	095	099	110	113	102	108	F 80			
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 40Z0		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 20Z0		
047	051	049	050	051	053	062	059	070	066	071	080	078	058	071	073	073	074	079	086	090	080	086	F 10			
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 2		
*064	+063	+064	+064	+065	+065	+067	+069	+071	+074	+078	+082	+082	+030	+030	+081	+085	+083	+085	+088	+094	+098	+100	+099	T200		
+066	+067	+067	+068	+069	+070	+072	+075	+078	+081	+086	+086	+084	+085	+087	+089	+092	+092	+099	+102	+105	+103	+103	+103	T160		
+069	+069	+070	+070	+071	+072	+074	+076	+079	+082	+085	+090	+090	+093	+093	+096	+096	+096	+096	+102	+106	+108	+107	+107	T120		
+072	+073	+073	+074	+075	+076	+078	+080	+083	+086	+089	+094	+094	+092	+093	+097	+097	+094	+097	+101	+106	+111	+111	+111	T 80		
+074	+076	+077	+077	+078	+079	+082	+084	+087	+090	+094	+098	+098	+096	+096	+097	+097	+101	+101	+104	+111	+114	+116	+116	T 40		
+075	+077	+078	+079	+080	+081	+084	+086	+089	+092	+096	+100	+100	+100	+100	+107	+107	+108	+108	+109	+113	+117	+119	+119	T 20		
+075	+078	+078	+079	+080	+080	+082	+085	+087	+091	+094	+097	+101	+101	+103	+103	+104	+104	+104	+104	+115	+118	+120	+120	T 9		
+075	+077	+078	+079	+080	+083	+086	+088	+093	+096	+099	+103	+103	+104	+104	+104	+104	+104	+104	+104	+110	+119	+120	+122	T 2		
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT200		
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20		

140573												140573												CABA UW		
GNT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03	00-01	01-02	02-03		
018	019	025	036	040	050	069	072	098	093	094	100	090	065	055	05											



180573															180573														
03-04		04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15							
129	131	135	137	141	146	150	148	143	134	109	097	089	090	086	099	111	113	113	115	126	121	118	118	D 200					
103	107	114	122	120	120	121	114	116	113	098	091	087	084	081	090	106	113	115	113	128	123	118	113	D 80					
105	104	115	128	112	105	108	100	118	114	103	090	091	079	079	094	109	114	116	117	129	128	119	115	D 10					
147	146	140	125	120	104	098	089	076	053	046	044	045	047	050	051	073	072	085	081	079	090	070	076	F 200					
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 160Z0				
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 120Z0				
088	087	073	068	067	058	051	045	043	046	046	046	044	045	050	046	066	058	080	073	073	080	064	070	F 80					
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 40Z0				
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 20Z0				
036	031	028	023	022	020	019	025	035	037	041	037	038	031	038	034	048	046	061	055	053	059	046	051	F 10					
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F ?				
+116	+115	+108	+100	+098	+095	+096	+094	+092	+099	+108	+116	+124	+129	+133	+139	+146	+148	+156	+158	+157	+159	+159	+163	T 200					
+119	+109	+102	+096	+093	+090	+090	+089	+089	+098	+110	+120	+129	+133	+138	+144	+151	+153	+161	+163	+162	+164	+164	+168	T 160					
+100	+101	+095	+090	+080	+087	+087	+086	+090	+101	+114	+124	+133	+137	+142	+148	+155	+157	+165	+167	+166	+168	+168	+173	T 120					
+086	+088	+083	+084	+082	+081	+082	+084	+083	+094	+104	+116	+128	+136	+141	+144	+151	+157	+159	+167	+170	+169	+170	+171	+175	T 80				
+082	+080	+078	+076	+074	+078	+080	+082	+086	+098	+109	+120	+130	+141	+145	+149	+156	+162	+165	+173	+174	+173	+175	+176	+180	T 40				
+081	+079	+076	+075	+077	+080	+083	+088	+100	+112	+124	+134	+144	+147	+153	+158	+164	+167	+176	+177	+175	+178	+178	+182	T 20					
+080	+077	+076	+074	+077	+074	+080	+084	+090	+101	+113	+126	+136	+146	+148	+153	+162	+165	+168	+177	+177	+175	+179	+179	+184	T 9				
+077	+074	+072	+070	+076	+076	+084	+092	+105	+117	+131	+140	+149	+148	+155	+163	+166	+170	+179	+177	+175	+175	+180	+185	T 2					
-000	+0000	-0000	+0000	+0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	CT 200					
-000	+0000	-0000	+0000	-0000	-0000	-0000	+0000	+0000	-0000	+0000	+0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	-0000	CT 20					

180573

180573

190573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	113	114	111	105	102	099	085	080	080	085	092	085
D 80	109	113	113	103	098	098	083	078	076	077	079	074
D 10	114	114	116	105	096	094	081	075	073	075	076	062
F 200	065	063	066	063	062	072	083	093	103	110	111	109
F 160Z0	xxx											
F 120Z0	xxx											
F 80	055	057	064	057	052	057	068	070	077	070	072	081
F 40Z0	xxx											
F 20Z0	xxx											
F 10	042	042	046	037	030	029	028	032	031	025	029	032
F 2	xxx											
T 200	+165	+167	+167	+167	+167	+165	+164	+164	+162	+161	+159	+154
T 160	+170	+172	+172	+172	+171	+168	+167	+165	+160	+154	+150	+145
T 120	+174	+176	+176	+176	+175	+174	+172	+169	+167	+165	+160	+154
T 80	+177	+179	+178	+178	+178	+177	+174	+170	+168	+164	+159	+154
T 40	+182	+184	+183	+183	+182	+179	+175	+170	+168	+163	+158	+153
T 20	+184	+186	+185	+184	+183	+180	+175	+169	+167	+162	+156	+151
T 9	+186	+187	+186	+185	+184	+180	+174	+167	+165	+161	+159	+155
T 2	+187	+188	+185	+184	+181	+177	+171	+164	+161	+157	+151	+145
C 200	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	+000	+000

190573

190573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
112	109	107	109	111	106	099	102	100	094	091	091	
082	081	081	084	080	079	083	081	082	085	084	083	
067	061	061	064	073	074	079	072	085	086	083	082	
094	088	086	088	083	097	099	109	105	081	073	071	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
086	089	088	080	078	074	070	058	056	060	065	057	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
025	025	024	026	033	042	043	037	041	042	045	042	040
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
+150	+150	+150	+144	+144	+145	+124	+152	+149	+133	+140	+142	+144
+148	+148	+143	+143	+142	+150	+147	+130	+130	+130	+137	+144	+146
+134	+134	+132	+113	+112	+108	+118	+123	+132	+141	+148	+150	+157
+110	+106	+103	+097	+095	+096	+104	+113	+123	+134	+143	+151	+153
+098	+095	+093	+091	+092	+098	+106	+115	+127	+139	+148	+155	+159
+091	+097	+086	+085	+093	+100	+109	+119	+131	+143	+152	+160	+169
+079	+077	+077	+080	+091	+100	+110	+121	+133	+145	+154	+161	+160
+000	+000	+000	+000	+000	+000	+001	+001	+000	+000	+000	+000	+000
+000	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	-000	-000
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

190573

190573

200573

CABA UW

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	085	090	091	090	093	095	098	099	097	095	094	095
D 80	083	077	083	084	086	091	091	095	091	086	086	098
D 10	079	074	081	084	080	090	091	097	091	079	084	086
F 200	086	108	107	112	112	120	126	133	133	136	133	129
F 160Z0	xxx											
F 120Z0	xxx											
F 80	062	070	069	070	070	073	083	081	082	085	087	085
F 40Z0	xxx											
F 20Z0	xxx											
F 10	036	036	037	035	029	033	038	039	032	031	028	030
F 2	xxx											
T 200	+164	+171	+171	+171	+170	+172	+176	+177	+177	+175	+176	+173
T 160	+163	+170	+170	+170	+171	+173	+175	+175	+175	+173	+173	+173
T 120	+164	+170	+170	+170	+171	+173	+175	+175	+175	+173	+173	+173
T 80	+166	+173	+173	+172	+173	+175	+176	+174	+173	+170	+168	+166
T 40	+169	+173	+174	+174	+174	+176	+177	+175	+173	+169	+165	+163
T 20	+171	+174	+176	+175	+175	+176	+177	+175	+171	+166	+164	+162
T 9	+172	+175	+176	+175	+175	+175	+176	+175	+171	+166	+161	+159
T 2	+172	+174	+174	+173	+173	+172	+174	+174	+166	+161	+157	+156
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

200573

200573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
242	258	255	196	192	194	201	181	188	205	211	219
205	240	214	179	168	156	162	154	172	198	203	211
183	222	172	155	154	142	148	149	168	201	210	213
053	044	048	057	052	055	064	055	044	050	055	057
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
039	028	024	030	050	042	045	041	046	043	048	046
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
023	011	012	023	028	028	032	037	037	041	042	049
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+114	+113	+115	+117	+114	+112	+119	+125	+120	+123	+127	+133
+117	+116	+118	+116	+115	+114	+119	+121	+128	+143	+147	+150
+119	+118	+120	+118	+117	+124	+126	+131	+135	+141	+146	+150
+120	+119	+121	+120	+118	+121	+125	+134	+138	+144	+150	+154
+121	+121	+122	+122	+122	+124	+126	+132	+148	+154	+159	+162
+123	+122	+122	+123	+123	+124	+126	+128	+139	+151	+157	+162
+124	+122	+124	+123	+124	+124	+127	+129	+140	+152	+159	+164
+123	+121	+121	+124	+124	+124	+126	+129	+132	+133	+139	+156
*	*	*	*	*	*	*	*	*	*	*	*
+003	-000	-000	-000	-000	-000	-002	-001	-000	-000	-000	-000
-001	-000	-000	-000	-000	-000	-006	-013	-006	-000	-000	-000
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000								

200573

200573

210573

CABA JWW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	245 265	301 344	054 033	054 069	071 076	072 078	082 086	096 101	102 103	107 109	116 121	131 159
D 80	245 269	301 345	010 016	040 051	063 071	065 073	076 078	081 086	091 092	095 096	098 102	111
D 10	256 269	296 331	001 012	031 041	051 050	049 062	063 068	072 071	080 080	079 099	087 092	108 115
F 200	021 015	007 011	009 015	023 034	047 051	062 068	069 073	076 078	087 088	093 103	100 090	085 074
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	022 016	012 015	012 016	025 038	043 049	064 080	084 078	079 086	090 099	089 089	087 091	077
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	020 016	012 013	011 012	017 019	017 016	016 024	028 025	029 025	026 026	030 031	025 024	026 025
F 2	xxx xxx											
T 200	+170 +170	+169 +171	+171 +170	+172 +173	+173 +171	+172 +173	+173 +173	+173 +174	+174 +173	+174 +174	+176 +173	+161
T 160	+174 +174	+175 +175	+175 +174	+175 +176	+176 +177	+172 +173	+175 +175	+174 +174	+174 +175	+175 +175	+174 +176	+158
T 120	+178 +178	+177 +178	+178 +178	+179 +179	+180 +173	+173 +176	+176 +176	+174 +174	+175 +175	+175 +175	+172 +172	+166 +156
T 80	+181 +181	+181 +182	+182 +181	+182 +182	+182 +182	+174 +169	+171 +161	+169 +162	+159 +162	+159 +160	+157 +157	+153 +156
T 40	+186 +187	+185 +186	+185 +186	+186 +186	+186 +186	+182 +182	+182 +182	+182 +182	+182 +182	+182 +182	+182 +182	+135
T 20	+188 +188	+186 +188	+187 +185	+186 +186	+186 +186	+176 +172	+161 +155	+153 +153	+150 +150	+146 +142	+142 +141	+141 +139 +138 +132
T 2	+190 +188	+188 +188	+188 +188	+188 +188	+188 +188	+181 +173	+169 +158	+152 +154	+151 +149	+144 +141	+141 +140	+141 +137 +136 +131
C 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
C 20	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000	+000 -000

210573

210573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
170 148	127 111	134 154	166 214	210 196	190 209	255 295	343 062	139 061	102 198	210 243	250 275	
127 134	135 128	138 129	147 165	171 182	185 206	255 298	340 093	151 060	121 198	206 222	254 269	
115 107	105 092	146 137	145 149	170 177	188 188	xxx xxx						
000 046	050 045	044 033	032 048	027 010	023 042	050 027	016 010	013 009	012 018	024 018	019 026	
xxx xxx												
xxx xxx												
071 062	051 050	035 033	030 023	012 011	023 024	052 036	010 008	013 015	016 022	015 020	026 026	
xxx xxx												
xxx xxx												
024 031	028 021	018 016	018 019	012 011	019 037	036 027	012 009	012 010	011 017	020 016	018 023	
xxx xxx												
+159 +163	+169 +173	+173 +173	+173 +173	+153 +153	+153 +153	+152 +145	+150 +148	+152 +158	+158 +165	+168 +171	+176 +177	+178 +181 +182 +183
+157 +160	+165 +167	+167 +158	+143 +142	+152 +147	+149 +145	+155 +152	+152 +158	+160 +170	+173 +175	+181 +192	+183 +186	+187 +187
+150 +154	+159 +159	+148 +143	+137 +137	+147 +145	+145 +152	+158 +154	+154 +151	+156 +161	+174 +177	+179 +184	+185 +186	+189 +190 +191
+146 +148	+149 +146	+134 +134	+127 +127	+134 +134	+146 +156	+162 +157	+148 +156	+156 +176	+180 +183	+187 +189	+190 +192	+194 +194
+132 +135	+135 +131	+129 +127	+125 +125	+128 +128	+150 +150	+159 +166	+161 +150	+153 +169	+180 +185	+187 +197	+193 +194	+196 +198
+128 +128	+128 +128	+128 +128	+128 +128	+129 +129	+137 +137	+153 +161	+168 +163	+152 +172	+183 +187	+189 +193	+195 +195	+199 +200
+126 +126	+127 +127	+128 +127	+127 +127	+130 +130	+134 +134	+154 +154	+163 +170	+165 +173	+184 +189	+191 +195	+197 +198	+200 +201
+119 +123	+124 +124	+126 +126	+127 +127	+132 +132	+132 +132	+142 +142	+158 +167	+174 +166	+154 +162	+179 +193	+192 +200	+202 +204 +206 +201
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 200
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 20

210573

210573

220573

CABA JWW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	237 202	262 297	335 327	287 292	248 222	235 222	239 253	251 254	249 237	233 231	234 239	247 255
D 80	233 199	245 278	334 338	290 306	234 206	203 202	209 221	236 240	244 243	232 217	213 217	220 228
D 10	236 205	286 273	328 249	290 277	171 181	195 216	217 217	226 224	245 244	233 212	202 200	211 197
F 200	067 103	046 053	045 028	039 018	019 044	046 053	073 078	091 090	091 088	084 085	085 089	084 084
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	063 090	058 045	038 014	033 012	014 034	045 056	052 050	071 060	049 055	064 062	062 050	051 051
F 40Z0	xxx xxx											
F 10	048 059	038 023	019 009	020 007	012 024	024 022	022 025	048 047	041 029	027 028	031 030	025 020
F 2	xxx xxx											
T 200	+169 +130	+127 +131	+117 +116	+119 +113	+135 +155	+136 +136	+131 +130	+128 +127	+124 +124	+124 +123	+121 +120	+120 +126
T 160	+174 +133	+130 +134	+121 +121	+119 +122	+117 +117	+140 +139	+133 +133	+131 +131	+130 +130	+127 +127	+124 +126	+124 +121 +125
T 120	+176 +135	+148 +152	+139 +134	+134 +137	+136 +136	+157 +142	+135 +135	+134 +134	+133 +133	+130 +130	+127 +127	+124 +123 +123
T 80	+179 +137	+134 +136	+134 +134	+128 +128	+125 +126	+140 +140	+142 +135	+136 +136	+135 +135	+130 +130	+127 +127	+124 +122 +122
T 40	+163 +138	+136 +136	+139 +139	+131 +129	+130 +129	+129 +130	+144 +144	+127 +133	+135 +138	+138 +138	+135 +135	+130 +128 +128 +120
T 20	+184 +140	+140 +140	+134 +134	+139 +137	+137 +137	+150 +136	+136 +136	+138 +138	+140 +140	+139 +139	+137 +137	+129 +122 +118 +116
T 9	+185 +141	+141 +140	+133 +131	+132 +132	+132 +131	+145 +145	+127 +127	+131 +133	+132 +132	+133 +133	+132 +132	+128 +127 +121 +116 +113
T 2	+183 +142	+142 +142	+134 +134	+134 +134	+132 +132	+143 +143	+131 +131	+135 +137	+139 +139	+138 +138	+135 +135	+128 +126 +124 +118 +104
*	*	*	*	*	*	*	*	*	*	*	*	*
CT 200	-001 -000	-000 -000	-003 -002	-014 -001	-005 -000	-014 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-006 -006	-006 -006	-018 -004	-001 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

220573

220573

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
245 240	237 2											

220573

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	239	249	256	271	290	322	359	016	034	056	062	056
D 80	239	249	260	277	288	324	354	007	017	029	037	042
D 10	245	254	264	280	286	329	351	005	012	021	023	033
F 200	040	036	039	034	026	022	031	040	042	048	051	076
F 160Z0	xxx											
F 120Z0	xxx											
F 80	035	036	038	031	023	023	040	053	056	057	061	071
F 40Z0	xxx											
F 2UZ0	xxx											
F 10	034	030	031	027	022	017	022	024	024	022	023	023
F 2	xxx											
T 20U	+160	+161	+161	+161	+162	+158	+152	+155	+157	+149	+147	+149
T 160	+165	+166	+165	+165	+166	+166	+161	+152	+154	+155	+150	+144
T 120	xxx	+169	+169	+168	+169	+163	+153	+153	+153	+155	+151	+152
T 80	+171	+172	+173	+172	+173	+166	+155	+153	+152	+143	+144	+145
T 40	+176	+177	+177	+176	+176	+168	+156	+151	+148	+140	+145	+139
T 20	+178	+179	+179	+178	+178	+168	+155	+148	+143	+140	+137	+135
T 9	+160	+160	+180	+178	+178	+176	+167	+155	+147	+143	+137	+134
T 2	+183	+183	+182	+178	+176	+169	+162	+153	+145	+135	+129	+126
C 120C	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 20	-000	-000	-000	-000	+000	-000	-000	-000	-000	-000	-000	+000
	*	*	*	*	*	*	*	*	*	*	*	*

230573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
144	213	227	221	213	209	214	216	214	213	215	223
167	205	222	217	208	202	207	210	210	208	206	214
184	208	225	220	213	205	209	217	213	211	209	215
120	125	111	113	105	111	112	112	105	095	096	093
xxx											
xxx											
066	102	073	089	041	091	094	103	093	087	078	082
xxx											
058	068	063	059	052	063	068	071	069	064	055	057
xxx											
+109	+109	+107	+104	+109	+112	+115	+117	+118	+117	+110	+107
+113	+114	+112	+113	+114	+115	+118	+121	+122	+123	+120	+123
+141	+122	+119	+116	+118	+122	+125	+126	+125	+124	+125	+125
+125	+123	+123	+120	+121	+123	+126	+129	+129	+128	+129	+128
+133	+123	+127	+123	+127	+130	+130	+130	+130	+130	+130	+130
+119	+120	+124	+126	+128	+131	+135	+136	+134	+134	+120	+120
+119	+120	+124	+126	+128	+131	+135	+136	+134	+134	+120	+120
+119	+120	+124	+126	+128	+131	+135	+136	+134	+134	+120	+120
+125	+129	+126	+123	+126	+129	+132	+132	+132	+132	+132	+132
+129	+126	+123	+126	+129	+132	+137	+135	+135	+135	+122	+121
+129	+126	+123	+126	+129	+132	+137	+138	+135	+133	+124	+124
* * * *	* * * *	* * * *	* * * *	* * * *	* * * *	* * * *	* * * *	* * * *	* * * *	* * * *	* * * *
-012	-018	+000	-004	-002	-000	-000	-000	-000	-000	+003	+000
-020	-015	-007	-000	+000	-000	-000	-000	-000	-000	-001	-000
	*	*	*	*	*	*	*	*	*	*	*

230573

230573	230573	240573	CABA UW									
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	211	209	210	208	204	206	200	217	229	220	220	220
D 80	204	201	203	196	194	197	192	205	211	206	201	196
D 10	209	207	207	212	198	193	201	195	208	204	204	210
F 200	096	094	078	082	079	065	068	079	072	069	073	067
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	071	079	073	066	061	055	056	063	059	069	063	057
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 10	051	060	055	042	044	042	040	033	029	033	035	029
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
T 200	+129	+133	+135	+134	+123	+130	+126	+128	+124	+122	+118	+115
T 160	+130	+137	+139	+137	+127	+134	+134	+132	+130	+125	+125	+124
T 120	+137	+140	+143	+140	+130	+137	+134	+134	+131	+128	+124	+124
T 80	+135	+143	+146	+144	+133	+144	+140	+137	+136	+134	+132	+125
T 40	+140	+148	+150	+146	+137	+148	+144	+139	+136	+133	+133	+129
T 20	+142	+151	+152	+148	+139	+150	+146	+139	+136	+134	+132	+127
T 9	+144	+152	+153	+148	+140	+150	+145	+138	+134	+132	+129	+129
T 2	+147	+156	+153	+148	+141	+151	+144	+135	+132	+130	+124	+121
C 200	-001	-001	-000	-000	-010	-000	-000	-000	-000	-000	-000	-000
C 20	+001	+000	+000	-000	-010	-000	-000	-000	-000	-000	-000	-000

240573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
228	229	229	225	221	222	223	227	234	239	240	238
223	224	223	217	212	212	219	226	230	231	230	253
231	231	230	224	217	218	221	227	232	236	235	264
099	104	091	101	107	118	125	116	110	109	106	095
xxx											
xxx											
079	046	082	072	076	083	082	098	098	094	092	088
xxx											
xxx											
053	050	049	050	053	052	067	068	073	068	070	064
xxx											
+100	+098	+099	+094	+094	+095	+095	+096	+097	+098	+099	+095
+104	+102	+102	+096	+097	+098	+098	+097	+098	+098	+099	+093
+107	+105	+105	+098	+099	+100	+100	+101	+102	+104	+103	+106
+111	+109	+109	+100	+100	+100	+100	+101	+102	+104	+103	+106
+114	+112	+112	+103	+104	+105	+104	+104	+105	+108	+111	+114
+115	+114	+114	+104	+105	+106	+106	+105	+106	+108	+110	+116
+115	+113	+114	+104	+105	+106	+106	+105	+107	+108	+111	+114
+113	+113	+114	+105	+107	+107	+107	+106	+108	+109	+111	+114
-000	-000	-000	+001	+000	-000	-000	+000	-000	-000	-002	-006
-000	+000	-000	+001	-000	-000	-000	-000	-000	-000	-001	-001
	*	*	*	*	*	*	*	*	*	*	*

240573

240573	CABA UW

240573												240573												CABA UW					
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	02-04	03-05	04-06	05-07	06-08	07-09	08-10	09-11	10-11	11-12	12-13	13-14	14-15				
D 200	285	280	288	292	299	292	288	278	280	281	280	279	275	269	269	272	273	271	268	274	287	285	293	289					
D 80	263	277	286	285	293	285	282	271	273	281	280	272	271	272	273	270	264	258	267	279	279	264	269						
D 10	259	284	292	290	295	290	286	276	278	289	280	271	272	274	258	260	241	221	234	184	213	230	245	297					
F 200	094	100	088	090	082	072	063	058	068	069	070	070	076	084	087	091	084	075	069	056	051	050	043	136					
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	090	088	092	085	068	061	052	048	054	058	060	059	064	058	053	054	052	041	032	033	030	031	029	024					
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	067	066	049	058	049	045	037	033	034	031	027	029	020	016	019	011	010	003	005	004	018	016	013						
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
T 200	+103	+100	+096	+095	+096	+094	+095	+097	+100	+100	+099	+097	+097	+099	+099	+099	+104	+107	+109	+107	+102	+099	+098	+095	+090				
T 160	+117	+104	+100	+099	+098	+098	+099	+103	+103	+103	+101	+100	+102	+102	+104	+106	+108	+104	+102	+099	+097	+096	+092						
T 120	+111	+108	+104	+102	+103	+104	+107	+107	+106	+104	+104	+103	+105	+107	+106	+104	+103	+100	+099	+097	+097	+093							
T 80	+115	+112	+108	+106	+107	+105	+106	+108	+110	+110	+108	+106	+106	+104	+103	+105	+106	+105	+103	+103	+098	+098	+095	+095					
T 40	+119	+116	+112	+110	+110	+111	+113	+112	+109	+106	+104	+102	+100	+100	+099	+099	+102	+096	+094	+090	+095	+096							
T 20	+121	+118	+114	+112	+111	+112	+113	+115	+112	+108	+105	+103	+100	+098	+097	+096	+095	+099	+086	+088	+087	+094	+097						
T 9	+122	+118	+114	+112	+112	+112	+113	+115	+114	+110	+106	+102	+099	+098	+094	+098	+090	+090	+077	+085	+093	+096							
T 2	+123	+119	+114	+112	+112	+112	+113	+114	+110	+106	+102	+099	+098	+089	+082	+076	+074	+069	+065	+061	+064	+083	+093	+095	+095				
C 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		

250573												250573												CABA UW				
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	02-04	03-05	04-06	05-07	06-08	07-09	08-10	09-11	10-11	11-12	12-13	13-14	14-15				
278	297	303	256	290	16	040	xxx	222	185	196	180	195	xxx	225	257	114	285	326	331	340	344	339	D 200					
265	257	256	281	288	xxx	185	215	xxx	160	162	180	200	194	062	013	xxx	329	358	003	333	346	D 80						
301	318	251	306	317	352	206	298	203	113	xxx	xxx	xxx	xxx	047	348	262	018	316	004	334	348	D 10						
023	019	020	014	011	007	004	007	xxx	009	008	010	010	xxx	007	008	009	013	015	012	015	019	023	F 200					
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
017	012	017	010	006	006	006	006	006	006	010	010	007	008	011	014	013	018	018	023	F 80								
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
008	016	012	012	008	005	006	007	006	006	009	010	005	009	010	012	010	014	017	020	F 40Z0								
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
*087	+087	+084	+084	+084	+085	+087	+088	+090	+093	+096	+098	+100	+102	+105	+108	+116	+114	+131	+140	+144	+147	+152	T 200					
+090	+086	+086	+086	+087	+087	+089	+090	+092	+095	+098	+100	+102	+105	+108	+111	+124	+131	+138	+144	+149	+152	+156	T 160					
+092	+090	+088	+088	+089	+091	+093	+094	+097	+100	+102	+104	+108	+118	+123	+135	+142	+148	+152	+156	+160	+160	+160	T 120					
+094	+092	+090	+090	+091	+091	+093	+095	+096	+096	+100	+102	+104	+106	+109	+112	+134	+139	+145	+151	+156	+159	+163	T 80					
+095	+093	+092	+093	+093	+094	+094	+095	+097	+099	+102	+104	+107	+109	+112	+115	+122	+143	+144	+150	+156	+160	+164	T 40					
+095	+092	+093	+094	+094	+094	+095	+095	+096	+096	+100	+103	+106	+108	+110	+116	+130	+145	+152	+158	+168	+170	+170	T 20					
+091	+092	+093	+094	+094	+094	+095	+095	+096	+096	+100	+104	+106	+108	+111	+114	+116	+128	+145	+152	+159	+164	+166	T 9					
+090	+092	+094	+095	+095	+096	+096	+097	+098	+098	+102	+106	+108	+109	+113	+116	+123	+132	+148	+152	+159	+164	+170	T 2					
+090	+092	+094	+095	+095	+096	+096	+097	+098	+098	+102	+106	+108	+110	+116	+121	+121	+126	+132	+140	+146	+152	+159	+166	+170	+170	+170	+170	
C 200	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	
CT 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	

260573												260573												260573												CABA UW			
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	02-04	03-05	04-06	05-07	06-08	07-09	08-10	09-11																				
<th

260573

260573

270573

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	095 091	083 086	087 077	074 080	076 074	078 083	086 086	089 093	096 096	097 100	098 099	098 100
D 80	084 092	087 086	089 077	074 078	075 076	075 075	076 077	078 081	083 083	083 082	087 085	082 086
D 10	082 091	084 089	096 083	077 064	074 068	065 071	066 071	075 072	067 071	072 081	078 075	075 084
F 200	035 031	041 041	054 067	071 062	073 086	095 100	096 096	097 106	114 114	114 117	112 105	106 106
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	031 029	041 037	047 055	057 051	051 056	072 082	087 086	085 082	082 085	084 084	085 083	082 083
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	024 023	026 028	031 028	029 020	020 023	020 024	025 026	023 022	022 021	020 023	026 026	034 034
F 2	xxx xxx											
T 200	+170 +180	+179 +180	+179 +177	+176 +175	+170 +167	+166 +165	+164 +162	+158 +156	+152 +149	+145 +143	+145 +140	+143 +144
T 160	+184 +184	+184 +184	+183 +181	+180 +179	+173 +170	+169 +169	+167 +165	+161 +156	+150 +148	+142 +140	+142 +137	+139 +142
T 120	+188 +188	+188 +187	+185 +184	+182 +176	+173 +170	+170 +170	+166 +165	+163 +157	+147 +144	+139 +136	+132 +126	+124 +124
T 80	+191 +191	+191 +192	+191 +188	+186 +184	+178 +174	+170 +168	+166 +165	+160 +154	+146 +140	+137 +132	+128 +125	+120 +116
T 40	+195 +195	+195 +195	+195 +194	+191 +188	+185 +178	+173 +167	+162 +156	+150 +146	+140 +134	+129 +125	+121 +118	+116 +112
T 20	+197 +198	+197 +197	+196 +197	+189 +188	+183 +175	+169 +162	+157 +151	+146 +141	+136 +129	+125 +121	+116 +115	+113 +110
T 9	+198 +199	+198 +197	+196 +196	+190 +187	+181 +172	+166 +158	+153 +147	+143 +138	+133 +126	+122 +118	+112 +113	+111 +108
T 2	+200 +200	+197 +196	+193 +187	+182 +173	+161 +154	+146 +139	+134 +134	+128 +123	+114 +109	+106 +101	+107 +106	+103 +105
C 200	-000 +000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
C 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

270573

270573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
104 104	102 102	104 105	107 107	102 100	104 101	104 100	104 104	094 094	099 099	102 105	105 106
067 086	085 084	088 089	093 094	096 102	100 103	102 100	101 104	098 100	103 103	104 105	110 110
003 084	084 081	085 086	090 090	103 112	106 114	110 105	110 114	099 103	106 112	114 111	113 119
105 102	110 107	104 104	106 100	083 065	057 057	056 051	054 053	055 057	060 061	063 065	064 064
xxx xxx											
xxx xxx											
092 094	061 069	069 058	051 046	043 047	045 051	048 052	050 051	053 055	054 053	059 057	059 059
xxx xxx											
xxx xxx											
036 036	037 035	032 034	036 036	035 041	036 043	042 041	039 038	040 040	043 039	041 042	039 046
xxx xxx											
+147 +153	+153 +155	+156 +156	+149 +149	+142 +142	+147 +154	+160 +160	+167 +173	+177 +180	+184 +184	+188 +189	+190 +192
+145 +149	+145 +148	+153 +149	+135 +138	+145 +150	+158 +165	+172 +178	+182 +186	+190 +192	+193 +194	+195 +195	+197 +197
+137 +144	+122 +116	+116 +114	+121 +121	+130 +139	+148 +154	+162 +170	+176 +183	+187 +190	+194 +196	+197 +198	+199 +201
+113 +112	+108 +109	+109 +107	+111 +120	+131 +141	+150 +157	+165 +172	+178 +185	+189 +192	+196 +198	+200 +201	+201 +203
+109 +103	+106 +106	+103 +113	+123 +134	+146 +154	+162 +170	+177 +184	+190 +194	+197 +201	+204 +204	+205 +206	+206 +208
+105 +107	+106 +106	+105 +105	+106 +110	+116 +125	+137 +149	+167 +173	+180 +187	+193 +197	+200 +204	+206 +206	+208 +210
+107 +105	+105 +105	+105 +110	+117 +127	+128 +150	+157 +166	+173 +180	+187 +196	+198 +201	+206 +207	+208 +209	+218 +211
+104 +103	+103 +105	+105 +110	+117 +128	+139 +151	+160 +168	+176 +183	+190 +198	+201 +204	+208 +209	+209 +209	+205 +212
+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000
+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000

270573	270573	260573	CABA UW									
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	100 095	092 089	087 089	088 087	087 091	094 094	095 096	101 101	109 118	122 126	129 129	127 129
D 80	100 096	094 086	081 085	085 082	080 082	084 084	083 089	093 093	097 097	102 101	101 102	102 102
D 10	103 102	101 087	084 084	087 087	080 077	082 080	077 077	078 081	085 092	094 094	096 095	093 094
F 200	068 070	065 066	075 086	095 102	112 111	124 136	147 145	144 144	151 154	153 150	146 139	152 152
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	021 061	061 057	056 062	062 063	069 077	078 084	087 094	093 090	089 089	090 086	091 091	095 095
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	042 042	037 034	035 027	026 027	029 027	026 026	025 031	031 031	037 041	038 036	034 031	033 036
F 2	xxx xxx											
T 200	+192 +192	+192 +192	+192 +193	+192 +191	+190 +190	+187 +184	+184 +182	+180 +179	+169 +169	+169 +165	+161 +155	+148
T 160	+197 +197	+197 +197	+197 +197	+196 +194	+194 +194	+193 +189	+186 +186	+181 +175	+172 +172	+178 +178	+170 +169	+170 +169
T 120	+201 +201	+201 +201	+200 +198	+197 +195	+194 +190	+187 +183	+183 +175	+175 +168	+160 +157	+157 +154	+152 +148	+149 +149
T 80	+204 +204	+204 +203	+204 +203	+203 +198	+195 +193	+190 +186	+186 +181	+176 +176	+163 +163	+158 +153	+148 +144	+144 +144
T 40	+208 +208	+208 +207	+207 +206	+203 +199	+195 +192	+187 +181	+175 +175	+169 +169	+164 +164	+156 +156	+146 +140	+136 +136
T 20	+210 +210	+210 +209	+209 +208	+203 +199	+195 +190	+183 +176	+176 +171	+165 +165	+160 +155	+154 +154	+144 +138	+133 +129
T 9	+211 +210	+210 +209	+209 +207	+201 +197	+193 +188	+186 +186	+188 +173	+167 +167	+162 +157	+153 +152	+149 +142	+136 +127
T 2	+200 +200	+203 +206	+207 +203	+196 +196	+187 +181	+172 +172	+156 +154	+154 +154	+147 +146	+145 +145	+138 +131	+126 +126
CT 200	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000
CT 20	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000

280573	280573	CABA UW										
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
131 153	130 129	125 122	118 118	118 118	118 115	115 113	118 119	122 123	120 128	129 127	124 124	124 124
165 166	166 105	107 110	112 114	111 114	114 115	111 114	117 117	123 123	119 126	129 124	121 121	123 123

280573

280573

290573

CABA UW

04-05	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	113	117	123	119	123	125	130	131	153	241	295	296
D 80	111	112	117	115	111	119	117	118	153	263	293	304
D 10	114	114	113	110	105	112	096	149	257	303	307	345
F200	073	067	064	064	071	076	079	068	040	064	064	073
F160Z0	xxx											
F120Z0	xxx											
F 80	063	060	050	052	060	059	055	049	040	065	061	069
F 40Z0	xxx											
F 20Z0	xxx											
F 10	038	035	026	021	019	020	013	017	021	025	031	027
F 2	xxx											
T200	*213	*214	*214	*215	*216	*215	*214	*209	*193	*174	*163	*163
T160	*217	*218	*218	*219	*219	*210	*218	*217	*211	*194	*174	*170
T120	*221	*222	*220	*222	*222	*213	*220	*219	*213	*195	*176	*170
T 80	*223	*224	*223	*223	*221	*221	*218	*212	*194	*175	*171	*165
T 40	*227	*227	*224	*222	*220	*19	*217	*215	*210	*194	*175	*169
T 20	*228	*228	*224	*221	*219	*216	*214	*211	*206	*192	*172	*166
T 9	*227	*227	*227	*219	*217	*214	*214	*211	*208	*168	*163	*159
T 2	*225	*222	*217	*213	*209	*209	*202	*196	*187	*170	*159	*154
CT200	*000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	*000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

290573

290573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
249	259	237	228	226	216	221	230	230	223	214	210	
242	224	233	217	216	205	210	217	218	214	207	201	
248	254	236	217	219	208	232	222	225	223	216	208	
073	067	051	061	064	058	056	056	049	046	050	044	
xxx												
xxx												
057	049	037	044	040	040	048	049	038	046	039	042	
xxx												
xxx												
U41	037	026	027	023	028	034	076	034	028	038	031	031
xxx												
+105	+102	+102	+101	+101	+105	+107	+109	+111	+115	+117	+119	+119
+108	+105	+103	+103	+103	+107	+109	+110	+114	+118	+121	+122	+123
+113	+109	+107	+105	+105	+110	+112	+112	+112	+116	+125	+126	+127
+114	+112	+111	+108	+111	+116	+119	+121	+122	+126	+129	+130	+131
+119	+114	+113	+110	+115	+123	+127	+130	+133	+134	+134	+135	+136
+121	+115	+111	+111	+116	+119	+127	+129	+132	+136	+136	+136	+137
+120	+115	+115	+111	+111	+116	+120	+122	+122	+128	+130	+130	+130
+118	+116	+115	+112	+112	+118	+120	+122	+122	+133	+136	+137	+137
*	*	*	*	*	*	*	*	*	*	*	*	*
-001	-000	-000	-000	-003	-003	-001	-001	-001	-000	-000	-000	-000
+004	+000	-000	-001	-003	-001	-000	+000	+000	-000	-000	-000	-000
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	+000	-000	-000	-000	-000	-000	+000	+000	-000

290573

290573

300573

CABA UW

03-04	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	235	234	220	229	232	234	215	202	210	212	200	191
D 80	234	233	215	226	224	231	215	197	202	193	179	184
D 10	239	241	222	236	230	231	219	203	195	197	177	166
F200	066	088	068	072	058	045	070	080	079	070	073	084
F160Z0	xxx											
F120Z0	xxx											
F 80	061	089	076	069	064	053	037	041	052	055	050	057
F 40Z0	xxx											
F 20Z0	xxx											
F 10	040	071	058	054	045	034	026	023	022	020	022	028
F 2	xxx											
T200	*145	*142	*134	*136	*135	*133	*131	*134	*134	*134	*133	*136
T160	*149	*146	*138	*140	*139	*133	*136	*136	*136	*135	*136	*138
T120	*153	*149	*142	*144	*143	*141	*136	*137	*139	*138	*138	*137
T 40	*160	*156	*153	*145	*147	*146	*144	*139	*140	*140	*139	*139
T 20	*162	*159	*157	*151	*152	*149	*147	*142	*142	*140	*137	*137
T 9	*163	*160	*151	*154	*154	*149	*147	*144	*142	*140	*137	*137
T 2	*163	*160	*152	*156	*156	*146	*145	*133	*132	*126	*119	*120
CT200	-000	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	+000	-000	-000	-000	-000	-000	+000	+000	-000

300573

300573

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
182	182	182	179	178	176	182	181	187	181	180	186	
170	172	171	168	169	169	172	178	182	178	176	180	
166	169	160	167	170	169	172	179	182	177	170	186	
110	107	108	105	106	105	101	678	097	095	092	091	
xxx												
xxx												
076	077	073	070	077	076	073	070	080	082	075	077	
xxx												
xxx												
045	047	045	043	051	056	053	058	057	051	054	060	
xxx												
+115	+115	+114	+107	+108	+110	+111	+109	+116	+117	+113	+115	
+124	+123	+121	+113	+111	+112	+116	+116	+121	+122	+123	+123	
+125	+125	+123	+113	+114	+116	+115	+126	+124	+119	+126	+130	
+121	+120	+120	+113	+115	+118	+118	+120	+133	+120	+124	+124	
+132	+132	+130	+116	+117	+119	+121	+136	+134	+132	+133	+137	
+133	+133	+131	+122	+119	+121	+123	+132	+138	+136	+134	+137	
+133	+132	+131	+124	+121	+125	+132	+132	+138	+136	+138	+130	
+131	+131	+130	+125	+122	+124	+123	+127	+125	+134	+131	+139	
*	*	*	*	*	*	*	*	*	*	*	*	
*007	+008	+003	-000	-000	-000	-001	-010	-005	-000	-001	-000	-000
*008	+008	+006	+002	+000	+000	+004	+000	+009	+011	+001	-000	-000
C1200	-000	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000
C1 20	-000	-000	-000	+000	-000	-000	-00					

300577

300573

310577

SARAH

310575

310573

310577

310573

212177

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	244	245	242	239	239	233	227	219	222	220	206	199	210	209	238	262	260	255	261	255	263	264	272	292
D 80	237	245	243	235	235	228	220	215	223	217	207	191	195	206	240	265	258	250	256	254	251	258	276	286
D 10	240	251	253	241	241	232	227	220	230	208	188	154	198	259	269	275	269	246	243	242	241	243	278	290
F 200	071	062	057	068	064	064	058	042	037	037	036	040	042	041	032	054	054	057	049	047	042	033	038	028
F 160	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	054	050	043	056	047	042	039	029	032	034	026	024	027	021	022	040	039	034	034	030	036	029	025	024
F 40	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	042	039	031	039	034	030	025	013	016	018	012	011	008	009	009	026	023	016	013	014	017	018	015	011
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+149	+149	+149	+146	+145	+148	+148	+148	+147	+146	+146	+149	+149	+142	+136	+129	+125	+124	+132	+138	+138	+128	+127	+122
T 160	+152	+153	+152	+150	+148	+150	+151	+151	+150	+149	+149	+151	+151	+144	+139	+130	+126	+124	+123	+133	+136	+128	+127	+123
T 120	+156	+157	+155	+151	+153	+153	+154	+154	+153	+152	+153	+153	+153	+146	+142	+136	+132	+135	+137	+138	+129	+128	+125	
T 80	+159	+160	+159	+157	+154	+156	+156	+157	+157	+155	+155	+156	+155	+148	+145	+136	+132	+128	+127	+129	+135	+132	+130	+128
T 40	+163	+164	+162	+161	+158	+159	+159	+159	+150	+158	+157	+157	+154	+150	+148	+141	+133	+131	+129	+131	+137	+139	+132	+130
T 20	+164	+166	+163	+162	+159	+161	+161	+160	+160	+159	+156	+155	+153	+150	+148	+142	+134	+132	+130	+132	+138	+131	+129	+128
T 9	+164	+166	+162	+161	+159	+160	+160	+159	+158	+156	+154	+153	+151	+147	+146	+141	+134	+131	+130	+135	+129	+127	+127	+127
T 2	+163	+165	+160	+160	+158	+160	+159	+157	+154	+149	+146	+145	+144	+142	+143	+140	+133	+130	+129	+128	+132	+125	+124	+123
C 1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-002	+002	+001	+001	-000	-000	+008	+008	+006	+000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+008	+006	-003	-004	-002

010673

010673

T10673

	010673												020673			CABA UW
03-04	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03				
D200	010 017	010 020	016 014	013 015	023 032	036 038	041 038	038 040	043 043	039 038	040 039	040 035				
D 80	017 017	021 022	013 010	012 013	020 028	036 037	039 034	033 036	041 039	032 029	032 034	034 029				
D 10	014 015	018 018	010 007	009 011	016 023	030 033	033 027	027 032	036 032	024 020	025 025	027 022				
F200	061 062	072 074	074 083	090 097	095 093	092 096	090 084	086 094	093 087	083 082	084 084	092 093				
F160Z0	xxx xxx															
F120Z0	xxx xxx															
F 80	058 065	071 071	064 067	072 073	076 074	073 076	071 068	072 075	074 065	062 062	065 072	071 071				
F40Z0	xxx xxx															
F20Z0	xxx xxx															
F 10	036 043	045 043	048 040	041 044	044 036	038 042	041 037	040 041	040 035	033 033	036 041	040 040				
F 2	xxx xxx															
T200	+117 +113	+118 +115	+114 +114	+112 +110	+110 +109	+104 +100	+097 +094	+090 +083	+082 +082	+082 +082	+082 +082	+079 +081				
T160	+122 +122	+122 +119	+118 +118	+115 +113	+115 +112	+108 +103	+100 +098	+094 +093	+089 +087	+087 +087	+086 +086	+085 +085	+082 +083			
T120	+126 +126	+126 +123	+122 +121	+119 +117	+118 +116	+111 +107	+103 +101	+097 +094	+092 +092	+090 +090	+089 +089	+089 +089	+088 +087			
T 80	+129 +130	+129 +127	+125 +125	+123 +120	+120 +121	+119 +115	+110 +107	+104 +101	+090 +089	+089 +088	+088 +089	+089 +087	+087 +087			
T 40	+134 +134	+134 +133	+130 +129	+128 +126	+123 +123	+121 +117	+113 +110	+107 +103	+092 +091	+091 +091	+090 +090	+090 +090	+090 +090			
T 20	+136 +136	+135 +132	+131 +130	+128 +125	+124 +124	+123 +119	+114 +111	+109 +105	+100 +098	+097 +097	+097 +097	+096 +096	+096 +096			
T 9	+135 +135	+135 +132	+130 +130	+127 +124	+123 +123	+122 +118	+114 +111	+108 +105	+096 +092	+092 +092	+092 +091	+092 +090	+090 +090			
T 2	+137 +137	+135 +132	+130 +129	+127 +124	+122 +122	+120 +117	+112 +110	+107 +104	+100 +094	+092 +092	+092 +091	+091 +091	+091 +091			
CT201	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000				
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-001 -001	-002 -001	-002 -000	-000 -000	-001 +004	+004 +004	

020673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15												
U31	027	026	021	017	016	012	011	014	009	350	334	332	320	318	313	302	290	284	289	281	279	278	
U27	024	023	020	014	011	004	006	011	007	344	330	332	319	318	305	292	279	272	277	273	275	D 80	
U21	019	016	010	007	359	075	008	004	359	328	332	319	319	307	291	280	273	279	276	277	280	D 10	
U4	103	103	108	114	114	102	117	118	105	080	120	122	124	136	132	137	117	114	116	111	094	085	074
xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F200											
xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0											
U82	086	083	083	088	084	080	090	091	085	063	104	093	104	113	119	105	099	096	094	088	075	072	067
xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
U49	049	043	047	053	049	050	057	054	052	044	075	066	071	077	082	075	068	066	066	059	055	057	054
xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10											
+U79	+084	+085	+087	+077	+078	+081	+083	+086	+086	+085	+085	+082	+082	+080	+073	+074	+076	+068	+070	+070	+072	+074	+071
+082	+086	+083	+082	+079	+081	+083	+085	+088	+089	+090	+087	+085	+084	+082	+080	+078	+079	+073	+073	+076	+077	+080	T200
+005	+089	+091	+083	+082	+082	+085	+087	+090	+091	+092	+089	+087	+086	+085	+083	+080	+078	+075	+075	+076	+079	+080	T160
+086	+091	+092	+085	+084	+085	+087	+086	+090	+092	+093	+094	+092	+090	+090	+089	+087	+086	+085	+085	+086	+087	+086	T120
+089	+093	+097	+089	+087	+088	+090	+092	+095	+096	+094	+092	+090	+086	+086	+089	+089	+087	+087	+087	+089	+083	+083	T 80
+096	+101	+102	+094	+098	+099	+091	+093	+096	+097	+098	+096	+094	+093	+091	+088	+089	+082	+083	+083	+084	+082	+084	T 40
+U90	+094	+095	+089	+088	+089	+090	+093	+096	+097	+097	+095	+093	+093	+091	+088	+089	+081	+081	+081	+081	+084	+084	+084
+094	+100	+101	+092	+088	+089	+091	+093	+096	+097	+098	+096	+094	+094	+092	+086	+084	+084	+084	+084	+084	+084	+084	+084
+004	+005	+005	+004	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
+004	+005	+005	+004	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

030673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
218	216	217	216	208	207	210	209	213	221	215	217	208	205	206	210	204	203	211	212	218	271	289	D 200	
193	194	195	195	195	195	196	196	201	211	208	210	201	202	203	202	201	200	208	206	208	213	270	288	D 80
181	186	193	193	195	197	197	200	205	217	212	212	205	208	213	210	206	206	214	214	216	279	291	D 10	
136	140	145	146	146	134	122	106	083	065	064	062	073	075	078	074	073	073	077	068	067	067	064	064	F200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0												
052	086	087	082	080	075	073	060	061	062	058	071	072	069	070	067	074	061	062	053	054	065	065	F 80	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
035	032	034	039	044	046	046	044	051	050	048	053	055	052	056	056	048	046	039	043	047	047	047	F 10	
+113	+110	+115	+118	+111	+103	+104	+104	+105	+111	+118	+125	+128	+134	+136	+141	+142	+141	+141	+141	+141	+134	+111	T200	
+105	+104	+107	+101	+099	+103	+106	+109	+116	+123	+130	+135	+139	+141	+145	+146	+147	+146	+145	+145	+145	+138	+115	T160	
+096	+094	+098	+097	+095	+107	+104	+108	+112	+120	+127	+134	+136	+139	+142	+144	+148	+146	+145	+145	+145	+145	+145	T120	
+088	+089	+089	+090	+093	+095	+106	+111	+113	+123	+130	+137	+14												

18

030673

0306

040673

CABAUV

040673

040673

03-04      04-05      05-06      06-07      07-08      08-09      09-10      10-11      11-12      12-13      13-14      14-

940673

8406

252131

• 17 •

050674

8.1-8.4 8.4-8.5 8.5-8.6 8.6-8.7 8.7-8.8 8.8-8.9 8.9-8.10

150673

050673

060673

CABALLW

060673

060673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
J64	066	067	067	068	063	053	052	052	054	054	050
J65	059	058	062	061	055	055	047	045	053	055	053
J50	026	031	033	045	037	050	047	040	050	049	053
J00	000	000	000	000	000	000	000	000	000	000	000
JXX	080	084	084	084	081	064	046	043	058	062	059
JXX	XXX										
JXX	XXX										
J47	043	046	041	041	039	046	044	044	057	058	054
JXX	XXX										
JXX	XXX										
J09	039	008	039	009	016	034	037	036	044	050	044
JXX	XXX										
JXX	XXX										
J88	+086	+085	+085	+083	+083	+084	+0d2	+087	+094	+102	+108
J86	+086	+084	+031	+082	+082	+086	+092	+099	+107	+113	+118
J81	+079	+079	+079	+080	+081	+089	+095	+103	+111	+117	+122
J81	+078	+077	+077	+076	+078	+080	+091	+099	+106	+114	+120
J76	+076	+073	+072	+071	+079	+095	+104	+111	+118	+125	+131
J70	+070	+070	+066	+056	+071	+081	+098	+107	+114	+121	+128
J63	+063	+063	+058	+058	+052	+070	+081	+098	+107	+115	+123
J47	+047	+045	+042	+053	+068	+078	+091	+099	+118	+125	+133
J00	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
J00	+000	+000	+000	+030	+000	+000	-000	-001	-000	-000	-000
J00	+000	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000

242-2

860673

2024 RELEASE UNDER E.O. 14176

070673

070673

8

070273

0809073

880673

090673

090673

090673

100673

CABAJW

GMT	15-16	15-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	267	278	279	285	301	310	299	270	264	257	252	240
D 80	266	264	265	282	301	311	309	293	266	259	247	233
O 10	270	269	290	289	305	313	310	298	268	244	238	226
F 200	067	069	059	066	059	057	044	037	027	040	053	045
F160Z0	xxx											
F120Z0	xxx											
F 50	066	065	054	063	058	056	048	027	022	026	027	036
F 40Z0	xxx											
F 20Z0	xxx											
F 10	056	053	046	052	048	044	034	016	011	014	013	020
F 2	xxx											
T 200	+136	+160	+177	+172	+165	+159	+154	+153	+152	+156	+157	+155
T 160	+191	+165	+181	+176	+170	+163	+157	+156	+155	+158	+156	+154
T 120	+194	+188	+185	+180	+174	+167	+160	+158	+158	+160	+161	+159
T 80	+128	+192	+188	+183	+178	+170	+163	+161	+161	+162	+164	+162
T 40	+202	+196	+193	+187	+182	+174	+167	+164	+163	+164	+163	+162
T 20	+204	+199	+195	+190	+184	+176	+168	+165	+164	+164	+163	+159
T 9	+216	+270	+196	+191	+185	+177	+168	+165	+164	+162	+160	+156
T 2	+219	+274	+200	+193	+186	+177	+167	+162	+159	+151	+143	+139
CT 200	-060	-011	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-010	-000	-000	-000	-000	-000	+000	-000	-000	-000	-000

100673

100673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
264	266	269	264	265	262	254	261	265	274	269	277
239	246	251	253	252	247	258	262	271	266	271	278
230	231	217	252	255	255	255	264	266	277	249	273
093	079	014	072	082	081	090	092	076	079	075	076
xxx											
xxx											
065	058	064	064	063	072	078	068	078	071	073	080
xxx											
xxx											
037	029	016	038	041	041	050	058	054	057	056	061
xxx											
*146	+145	+142	+139	+137	+135	+136	+136	+135	+137	+139	+138
+148	+147	+145	+140	+139	+140	+140	+141	+140	+142	+143	+141
+149	+148	+146	+144	+142	+143	+144	+144	+143	+145	+147	+140
+147	+146	+144	+145	+147	+145	+146	+147	+148	+147	+149	+151
+143	+144	+148	+150	+149	+150	+151	+151	+152	+154	+154	+159
+142	+142	+146	+151	+151	+151	+153	+154	+154	+158	+152	+146
+141	+141	+145	+150	+150	+151	+153	+154	+154	+158	+152	+145
+139	+139	+143	+146	+140	+150	+151	+155	+156	+157	+160	+153
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

CT 200

CT 20

110673

100673

110673

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	273	276	264	291	295	274	294	290	284	291	294	296
D 80	271	270	272	297	296	294	294	293	297	297	293	295
O 10	264	275	251	292	302	301	299	298	301	299	305	304
F 200	080	065	061	064	064	066	060	054	045	046	053	048
F160Z0	xxx											
F120Z0	xxx											
F 80	074	054	052	060	061	067	059	049	047	047	044	042
F 40Z0	xxx											
F 20Z0	xxx											
F 10	028	044	041	045	046	046	041	032	028	026	025	021
F 2	xxx											
T 200	+139	+171	+125	+123	+121	+118	+117	+115	+114	+113	+112	+112
T 160	+124	+124	+129	+127	+125	+122	+120	+119	+119	+118	+117	+117
T 120	+127	+128	+131	+131	+130	+126	+124	+123	+122	+121	+120	+120
T 80	+131	+131	+135	+137	+135	+129	+127	+126	+125	+124	+123	+123
T 40	+136	+135	+139	+141	+139	+135	+133	+131	+129	+128	+127	+126
T 20	+138	+138	+141	+143	+141	+137	+134	+132	+130	+129	+128	+127
T 9	+139	+139	+144	+142	+138	+135	+133	+131	+129	+128	+127	+127
T 2	+141	+140	+143	+145	+142	+138	+135	+132	+128	+127	+125	+125
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

CT 200

CT 20

110673

110673

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
233	222	220	236	252	255	259	270	271	273	271	279	276
179	172	150	194	212	224	241	254	266	272	265	276	274
162	174	161	168	214	224	242	260	270	277	266	283	278
036	042	047	043	060	056	055	050	052	051	054	056	057
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
025	031	019	046	046	043	043	051	046	050	058	055	054
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
015	014	021	025	023	031	036	045	039	044	047	048	045
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
*124	+121	+121	+125	+124	+126	+128	+129	+132	+134	+135	+136	+137
+125	+123	+124	+125	+128	+131	+133	+136	+138	+140	+141	+142	+143
+125	+125	+127	+128	+130	+134	+137	+140	+141	+143	+144	+145	+146
+125	+126	+129	+129	+131	+138	+140	+141	+143	+144	+145	+147	+148
+124	+124	+126	+128	+132	+134	+147	+147	+150	+153	+153	+155	+157
+124	+124	+126	+128	+132	+134	+148	+149	+151	+154	+155	+156	+158
+123	+124	+126	+128	+133	+140	+141	+143	+145	+147	+148	+149	+150
+119	+122	+124	+128	+134	+141	+147	+150	+152	+158	+160	+161	+162
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

CT 200

CT 20

110523

110673

120673

CABALUT

120673

120673

120673

• 100 •

130673

130673

130673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA JW
D 200	318 327	330 332	335 325	337 337	338 344	343 347	337 334	333 329	321 324	323 319	322 315	317 319
D 80	319 327	334 336	335 334	335 335	336 341	340 336	332 328	323 315	302 302	313 311	305 304	309 306
D 10	325 331	336 339	337 376	338 336	335 336	331 327	326 310	250 229	235 272	274 275	274 281	284 273
F 200	083 084	077 085	081 074	070 062	069 064	060 064	067 065	058 051	060 071	074 078	068 074	088 082
F 160Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 120Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 80	080 082	073 080	078 069	064 058	063 056	056 060	061 054	043 034	033 045	045 055	058 052	058 066
F 40Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 20Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 10	064 066	062 065	055 050	044 036	032 026	023 025	019 012	009 013	016 016	020 018	023 016	024 020
F 2	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 200	+140 +136	+135 +134	+127 +126	+126 +125	+124 +123	+121 +120	+119 +118	+117 +116	+118 +117	+114 +113	+110 +108	+107 +107
F 160	+14 +141	+140 +139	+131 +131	+130 +130	+129 +128	+126 +124	+123 +122	+120 +119	+120 +117	+120 +116	+113 +111	+109 +109
F 120	+1 +6 +144	+142 +135	+134 +133	+132 +132	+129 +128	+126 +125	+123 +123	+120 +119	+120 +119	+120 +119	+116 +113	+111 +109
F 80	+1 +1 +148 +147	+146 +138	+138 +137	+135 +134	+134 +132	+130 +129	+127 +125	+123 +123	+120 +116	+122 +121	+119 +118	+115 +111
F 40	+1 +6 +153 +152	+151 +141	+142 +141	+139 +136	+133 +132	+129 +127	+123 +122	+119 +119	+114 +114	+112 +111	+116 +113	+113 +111
F 20	+1 +9 +156 +154	+153 +143	+143 +142	+139 +133	+127 +126	+123 +121	+117 +114	+114 +112	+108 +108	+102 +102	+099 +095	+097 +094
F 2	+1 +6 +158 +157	+155 +144	+144 +142	+139 +131	+125 +125	+116 +116	+109 +109	+103 +103	+096 +092	+091 +086	+087 +082	+087 +083
F 2	+1 +6 +164 +163	+160 +144	+143 +137	+125 +113	+107 +101	+094 +088	+084 +084	+068 +067	+064 +068	+066 +063	+065 +066	+066 +061
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

140673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	140573
S 10	319 324	328 327	325 323	318 316	314 314	316 320	327 322	319 322	316 321	314 316	316 323	332 D 200
S 05	316 309	312 312	320 323	320 311	315 315	314 319	331 331	324 315	324 324	313 313	321 328	328 D 80
S 02	276 276	282 308	321 324	323 321	312 322	319 326	330 339	320 320	325 316	331 314	317 320	332 D 10
U 05	075 076	079 081	078 065	049 056	057 063	064 061	064 058	062 060	055 055	055 052	049 049	056 055 F 200
U 00	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx F 160Z0
U 00	056 056	049 048	048 046	053 053	059 063	060 061	058 057	057 054	054 055	051 046	049 053	053 F 80
U 02	017 021	020 020	029 019	039 044	046 046	051 053	054 052	051 050	046 046	049 046	040 043	047 047 F 20Z0
U 02	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx F 10
+0.6 +106 +105	+104 +104	+104 +103	+105 +107	+107 +108	+110 +110	+112 +112	+113 +115	+115 +116	+118 +120	+120 +122	+123 +125	+126 +125 T 200
+110 +109	+118 +107	+103 +107	+107 +109	+111 +113	+115 +115	+116 +117	+118 +120	+121 +121	+123 +124	+124 +125	+127 +128	+130 +130 T 160
+110 +111	+110 +109	+105 +107	+107 +110	+113 +113	+115 +116	+118 +120	+120 +120	+121 +121	+123 +124	+124 +125	+128 +130	+133 +134 T 120
+110 +111	+109 +109	+107 +108	+108 +113	+117 +119	+120 +120	+122 +124	+124 +124	+127 +127	+128 +130	+133 +133	+134 +135	+137 +138 T 80
+107 +108	+101 +101	+103 +103	+109 +110	+117 +122	+124 +124	+125 +127	+127 +127	+130 +130	+131 +134	+134 +136	+138 +139	+141 +142 T 40
+0.8 +0.8	+0.6 +0.6	+0.9 +0.9	+112 +120	+124 +127	+128 +130	+131 +131	+133 +134	+137 +137	+139 +142	+142 +142	+144 +146	+146 +147 T 20
+0.6 +0.6	+0.72 +0.63	+0.80 +0.80	+114 +123	+123 +131	+135 +135	+134 +142	+142 +142	+145 +145	+147 +148	+148 +148	+149 +150	+150 +157 T 2
* +0.00 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 C 200	+0.00 +0.00 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 C 20											

140673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA JW
D 200	332 323	319 327	328 328	323 326	331 342	344 348	344 001	031 018	082 142	160 184	201 201	210 232
D 80	333 325	316 325	325 329	321 321	326 332	333 335	337 350	007 003	355 347	355 355	313 313	309 328
D 10	335 327	318 328	326 334	323 323	327 337	312 318	326 023	015 015	284 217	241 241	207 271	330 310
F 200	059 057	054 054	049 049	052 055	049 043	039 035	035 025	023 022	012 003	003 011	012 009	011 010 F 200
F 160Z0	xxx xxx	xxx xxx F 160Z0										
F 120Z0	xxx xxx	xxx xxx F 120Z0										
F 80	058 058	052 054	049 050	050 056	049 043	042 045	045 036	029 020	006 006	002 002	008 008	009 011 F 80
F 40Z0	xxx xxx	xxx xxx F 40Z0										
F 20Z0	xxx xxx	xxx xxx F 20Z0										
F 10	049 045	045 045	044 039	039 039	027 013	010 015	017 006	006 006	007 006	006 006	006 006	007 006 F 10
F 2	xxx xxx	xxx xxx F 2										
F 200	+124 +123	+122 +121	+119 +117	+115 +115	+112 +112	+110 +109	+107 +107	+106 +106	+104 +104	+103 +103	+103 +103	+104 +104 T 200
F 160	+129 +127	+127 +125	+124 +121	+119 +116	+114 +114	+112 +110	+109 +108	+108 +107	+106 +106	+105 +104	+104 +104	+104 +104 T 160
F 120	+133 +132	+131 +129	+127 +125	+123 +120	+117 +115	+114 +112	+111 +110	+110 +109	+108 +107	+107 +106	+106 +104	+104 +104 T 120
F 80	+137 +135	+135 +133	+131 +129	+127 +125	+120 +118	+117 +115	+113 +112	+112 +112	+109 +108	+108 +107	+107 +106	+106 +104 T 80
F 40	+142 +141	+139 +137	+136 +133	+131 +127	+127 +127	+117 +115	+114 +112	+109 +109	+108 +108	+108 +107	+107 +106	+105 +104 T 40
F 20	+145 +144	+142 +140	+139 +138	+133 +133	+128 +128	+123 +123	+114 +114	+109 +109	+107 +107	+103 +103	+103 +103	+103 +103 T 20
F 9	+148 +146	+145 +142	+139 +137	+134 +134	+129 +129	+123 +123	+113 +113	+106 +106	+102 +102	+98 +98	+96 +96	+98 +98 T 9
F 2	+156 +153	+149 +147	+144 +140	+136 +136	+128 +128	+117 +117	+104 +104	+97 +97	+83 +83	+78 +78	+77 +77	+76 +76 T 2
* +156 +153	+149 +147	+144 +140	+136 +136	+128 +128	+117 +117	+104 +104	+97 +97	+83 +83	+78 +78	+77 +77	+76 +76	+75 +75 T 2
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000 CT 200
CT 20	-000 +000	+000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000 CT 20

150673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	150673
255 253	272 252	236 222	216 210	213 221	224 238	239 238	xxx xxx D 200					
347 327	329 285	226 211	186 189	205 220	216 233	233 233	xxx xxx D 80					
U 01	325 059	190 176	162 178	157 208	226 223	241 241</td						

150673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW
D200	xxx 324	324 328	336 338	348 346	347 359	018 032	040 041	045 051	053 053	057 067	075 078	083 090	
D 80	xxx 325	326 333	339 335	340 335	334 342	005 018	042 044	051 056	059 060	062 061	072 077	075 077	
D 10	xxx 329	329 337	343 338	341 338	336 339	347 357	019 041	043 047	052 053	050 051	069 067	058 067	
F200	xxx 057	059 056	054 054	055 052	050 051	060 070	067 062	071 072	072 072	080 079	073 073	068 065	068 067 066
F160Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 80	xxx 057	056 056	054 054	051 049	050 055	057 058	058 055	058 057	057 057	067 069	059 059	054 050	058 061
F 40Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 20Z0	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
F 10	xxx 051	051 048	045 042	035 029	029 032	026 017	015 011	016 014	017 017	017 017	011 013	015 015	017 018
F 2	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx	xxx xxx
T200	xxx +166	+161 +156	+153 +152	+151 +150	+149 +147	+145 +142	+139 +134	+132 +130	+128 +128	+128 +130	+131 +132	+131 +129	+123 +123
T160	xxx +170	+165 +161	+158 +155	+154 +152	+150 +148	+145 +142	+137 +134	+132 +132	+131 +129	+131 +131	+134 +132	+131 +129	+122 +120
T120	xxx +174	+169 +164	+161 +159	+158 +156	+153 +151	+148 +145	+140 +137	+135 +134	+134 +134	+130 +131	+134 +134	+131 +129	+122 +120
T 80	xxx +178	+173 +168	+165 +163	+161 +159	+156 +153	+150 +146	+142 +139	+138 +136	+136 +133	+129 +132	+130 +127	+127 +126	+121 +120
T 40	xxx +183	+178 +173	+169 +167	+167 +165	+162 +158	+153 +148	+143 +138	+136 +134	+135 +132	+126 +125	+125 +125	+117 +117	+115 +115
T 20	xxx +186	+161 +176	+172 +169	+167 +163	+157 +149	+140 +135	+130 +128	+127 +127	+124 +124	+119 +118	+118 +117	+118 +117	+116 +111
T 9	xxx +183	+182 +178	+174 +171	+168 +163	+154 +147	+137 +131	+127 +123	+124 +122	+120 +116	+115 +111	+114 +113	+109 +105	+107 +107
T 2	xxx +195 +188	+184 +178	+173 +169	+169 +163	+150 +139	+126 +122	+118 +108	+108 +108	+108 +108	+105 +103	+103 +102	+101 +101	+099 +099
CT200	xxx -000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CF 20	xxx +000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

160673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	160673	
040 071	096 095	096 081	075 078	085 080	083 082	087 090	089 092	102 100	092 092	087 091	089 088	068 087	D200
079 080	077 074	075 075	076 077	080 079	078 088	087 085	093 093	103 111	095 095	082 089	085 085	087 089	D 80
065 051	065 060	070 070	073 079	070 075	077 083	099 087	090 102	109 117	101 101	094 095	088 088	092 092	D 10
004 000	060 063	062 053	047 050	041 039	038 037	035 045	041 040	036 038	033 030	040 037	043 042	040 040	F200
xxx xxx	F160Z0												
059 054	060 055	052 049	045 045	040 039	037 038	032 042	039 033	033 033	038 031	038 034	036 036	039 039	F120Z0
xxx xxx	F 40Z0												
xxx xxx	F 20Z0												
016 013	019 031	036 034	034 037	030 034	032 033	029 034	031 028	029 033	027 030	029 031	032 032	032 032	F 10
xxx xxx	F 2												
*119 +118	+118 +116	+116 +115	+115 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	T200
+117 +116	+115 +115	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	+116 +116	T160
+117 +115	+108 +108	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	T120
+113 +108	+105 +105	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	+109 +109	T 80
+109 +106	+103 +103	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	T 40
+106 +102	+102 +102	+101 +101	+101 +101	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	T 20
+103 +101	+101 +101	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	+100 +100	T 9
+107 +107	+102 +102	+102 +102	+101 +101	+101 +101	+101 +101	+101 +101	+101 +101	+101 +101	+101 +101	+101 +101	+101 +101	+101 +101	T 2
+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT200
+000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 20

160673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW
D200	094 098	101 100	103 103	094 090	087 091	098 102	104 107	111 117	124 128	131 134	144 145	151 156	171
D 80	101 105	103 099	102 105	094 087	084 085	094 100	098 100	101 106	111 117	121 121	122 128	127 131	
D 10	112 109	114 114	113 107	094 085	079 081	093 102	102 102	101 111	110 115	119 119	119 119	115 121	
F200	041 043	045 043	038 041	043 048	049 057	063 068	073 079	088 096	097 100	098 098	090 090	078 069	070 059
F160Z0	xxx xxx												
F120Z0	xxx xxx												
F 80	039 041	030 038	034 038	033 039	048 049	054 063	073 081	082 081	082 081	081 081	078 075	073 071	
F 40Z0	xxx xxx												
F 20Z0	xxx xxx												
F 10	035 034	034 051	029 028	028 021	018 016	017 017	022 025	025 024	023 023	025 025	023 023	022 022	020 020
F 2	xxx xxx												
T200	+195 +197	+199 +200	+201 +201	+201 +201	+200 +200	+200 +200	+199 +198	+196 +195	+193 +192	+191 +191	+191 +191	+191 +191	+196 +196
+199 +201	+203 +205	+205 +205	+205 +205	+205 +205	+203 +203	+203 +203	+200 +200	+198 +197	+195 +193	+192 +192	+190 +190	+191 +189	+190 +190
T160	+204 +206	+208 +209	+209 +208	+208 +208	+207 +207	+206 +206	+205 +205	+203 +203	+199 +197	+193 +193	+189 +189	+181 +181	+185 +185
T 80	+207 +209	+211 +212	+212 +213	+211 +211	+210 +210	+210 +210	+209 +209	+207 +207	+203 +201	+195 +191	+187 +183	+175 +175	+172 +170
T 40	+211 +214	+214 +215	+217 +216	+215 +215	+213 +209	+207 +204	+198 +195	+195 +190	+186 +182	+182 +176	+172 +170	+166 +163	+163 +159
T 20	+214 +217	+217 +218	+218 +216	+216 +212	+208 +208	+203 +198	+198 +195	+190 +186	+182 +179	+173 +173	+168 +166	+163 +163	+157 +157
T 9	+210 +219	+219 +218	+218 +216	+216 +212	+208 +208	+203 +198	+198 +195	+190 +186	+182 +179	+173 +173	+168 +166	+163 +163	+152 +152
T 2	+223 +224	+225 +224	+224 +221	+221 +217	+217 +204	+194 +188	+188 +183	+183 +180	+176 +174	+171 +171	+166 +166	+161 +159	+154 +154
CT200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

170673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	

270573

17067

180433

1480

19025

180673

180-33

1884

GMT	180673												190673			CABA UW									
	1-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D200	319	323	319	321	322	325	329	337	348	030	048	056	060	072	076	083	081	089	091	088	091	095	105	118	
D 80	317	322	317	315	317	319	321	328	330	007	038	061	063	061	064	069	066	073	070	066	072	076	082	094	
D 10	322	324	320	318	318	322	322	327	324	331	009	043	037	052	056	060	037	048	028	029	036	054	067	062	
F200	058	061	054	054	050	051	045	049	049	045	050	050	051	053	054	054	052	053	048	046	046	055	056	055	
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F 80	056	058	053	052	049	050	046	048	045	035	047	045	044	048	055	057	053	053	048	046	045	056	054	053	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
F 10	049	049	046	045	041	040	033	028	027	018	015	011	007	009	010	014	011	010	011	012	012	018	017	019	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
T200	+185	+182	+181	+179	+163	+176	+174	+172	+169	+167	+164	+159	+156	+156	+157	+157	+154	+153	+153	+152	+152	+150	+148	+149	+155
T160	+189	+186	+185	+183	+167	+180	+178	+179	+172	+170	+167	+162	+158	+158	+157	+157	+155	+154	+154	+152	+152	+150	+148	+150	+154
T120	+193	+190	+189	+187	+171	+183	+181	+179	+175	+172	+170	+165	+161	+159	+158	+158	+157	+155	+154	+154	+152	+151	+148	+150	+154
T 80	+197	+194	+192	+191	+175	+187	+185	+182	+177	+173	+169	+166	+162	+160	+157	+155	+153	+153	+154	+153	+153	+150	+149	+150	+154
T 40	+202	+199	+197	+196	+180	+192	+188	+184	+178	+174	+166	+161	+158	+155	+153	+151	+148	+147	+147	+146	+145	+143	+141	+138	+151
T 20	+205	+202	+200	+198	+182	+194	+190	+185	+179	+172	+163	+156	+154	+149	+146	+146	+140	+138	+134	+130	+128	+127	+129	+127	+127
T 2	+215	+212	+209	+206	+187	+198	+191	+185	+174	+158	+146	+138	+131	+123	+117	+119	+118	+108	+105	+104	+103	+109	+109	+109	+113
CT200	-000	-000	-000	-000	-014	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	-000	-000	-014	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001	-000	-000	-000

100433

190673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D 200	215	237	280	322	324	329	344	002	024	035	043	059
D 80	216	238	277	327	337	343	357	014	024	033	041	048
O 10	222	245	284	334	346	350	002	018	030	035	035	046
F 200	029	029	035	058	058	057	046	045	057	066	065	070
F160Z0	xxx											
F120Z0	xxx											
F 80	029	027	034	061	056	052	051	057	065	068	067	073
F 40Z0	xxx											
F 20Z0	xxx											
F 10	026	024	029	049	040	038	029	025	024	023	025	028
F 2	xxx											
T 200	+217	+218	+213	+199	+196	+195	+196	+197	+197	+199	+203	+207
T 160	+221	+222	+216	+202	+199	+197	+198	+198	+199	+199	+202	+205
T 120	+225	+226	+220	+205	+202	+199	+200	+199	+200	+197	+207	+206
T 80	+228	+230	+224	+209	+205	+202	+202	+201	+201	+197	+207	+198
T 40	+233	+234	+228	+213	+208	+206	+204	+201	+197	+195	+195	+197
T 20	+235	+236	+230	+215	+209	+207	+204	+200	+193	+188	+187	+186
T 9	+237	+238	+232	+216	+211	+208	+205	+200	+192	+187	+185	+184
T 2	+242	+241	+235	+220	+213	+210	+205	+198	+187	+181	+178	+177
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

200673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	200673
142	141	136	128	127	124	121	118	116	113	120	119	115
114	113	110	105	111	112	110	111	113	112	117	116	117
108	107	106	103	112	118	116	117	116	119	120	124	127
155	153	147	140	133	128	118	099	086	088	079	073	075
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
090	095	084	082	080	075	078	079	077	078	073	066	074
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
u40	u39	u41	u38	u41	u47	u46	u53	u59	u57	u52	u51	u50
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+194	+186	+186	+173	+165	+163	+163	+163	+166	+173	+178	+184	+190
+181	+180	+174	+167	+162	+162	+164	+166	+171	+177	+183	+189	+196
+1/2	+170	+167	+162	+161	+162	+167	+170	+175	+181	+187	+194	+194
+167	+155	+163	+160	+161	+164	+169	+173	+177	+183	+189	+196	+196
+164	+153	+162	+160	+163	+167	+173	+177	+182	+188	+201	+209	+214
+164	+152	+162	+161	+163	+168	+174	+179	+184	+190	+198	+204	+215
+162	+152	+161	+161	+164	+169	+176	+180	+186	+192	+199	+206	+215
+162	+150	+160	+160	+164	+164	+169	+177	+182	+188	+195	+202	+205
+162	+150	+160	+160	+164	+164	+169	+177	+182	+188	+195	+202	+207
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

200673

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D 200	218	218	248	280	276	270	266	265	269	278	278	276
D 80	212	212	244	275	274	272	266	268	272	281	271	272
O 10	217	217	252	278	276	277	271	276	276	288	272	256
F 200	051	064	086	092	097	087	080	067	062	060	050	051
F160Z0	xxx											
F120Z0	xxx											
F 80	046	056	071	076	074	063	061	055	048	044	038	037
F 40Z0	xxx											
F 20Z0	xxx											
F 10	032	038	053	056	051	042	040	037	033	025	024	023
F 2	xxx											
T 200	+176	+167	+160	+147	+142	+134	+134	+135	+140	+143	+143	+139
T 160	+179	+169	+161	+150	+145	+136	+137	+138	+142	+142	+141	+136
T 120	+183	+172	+164	+153	+148	+139	+141	+145	+144	+140	+137	+138
T 80	+186	+174	+168	+156	+151	+141	+141	+143	+147	+147	+140	+138
T 40	+190	+176	+167	+159	+155	+147	+144	+146	+150	+150	+147	+146
T 20	+192	+177	+173	+162	+157	+148	+145	+147	+151	+152	+152	+150
T 9	+192	+178	+173	+163	+157	+146	+146	+148	+157	+158	+152	+151
T 2	+192	+178	+173	+163	+157	+148	+147	+149	+152	+152	+151	+149
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

210673

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
311	315	328	332	329	328	330	328	322	323	347	352	352
323	329	333	320	309	309	317	316	311	317	327	352	303
330	320	335	309	296	300	314	314	317	311	323	341	350
042	044	049	054	047	045	044	038	032	027	019	027	021
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
033	029	030	032	029	030	035	030	025	018	027	017	024
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
017	012	015	019	021	020	023	028	025	021	017	024	020
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
*132	*135	*134	*134	*133	*134	*134	*135	*136	*136	*136	*136	*136
+136	+138	+137	+136	+137	+138	+139	+140	+144	+144	+154	+154	+154
+139	+141	+140	+140	+140	+141	+142	+143	+144	+147	+154	+154	+154
+142	+143	+143	+143	+143	+144	+144	+144	+147	+147	+155	+155	+155
+145	+145	+146	+146	+146	+146	+147	+148	+147	+147	+152	+152	+152
+146	+146	+147	+148	+148	+148	+150	+152	+153	+154	+158	+166	+166
+147	+147	+148	+148	+148	+149	+150	+153	+154	+154	+157	+169	+169
+147	+147	+148	+148	+148	+149	+150	+152	+154	+155	+161	+172	+172
+147	+147	+148	+148	+148	+149	+150	+152	+154	+155	+161	+170	+172
+147	+147	+148	+148	+148	+149	+150	+152	+154	+155	+161	+172	+172
+147	+147	+148	+148	+148	+149	+150	+152	+154	+155	+161	+172	+172



230673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	006	004	007	009	011	013	016	017	019	024	023	027
D 80	003	001	004	007	011	009	013	014	016	020	018	016
D 10	004	003	006	008	011	009	012	012	014	016	015	012
F200	116	119	124	131	131	117	125	123	119	116	117	116
F160Z0	xxx											
F120Z0	xxx											
F 80	113	113	119	124	120	101	110	102	100	093	090	088
F 40Z0	xxx											
F 20Z0	xxx											
F 10	077	077	079	081	077	065	063	062	057	049	045	041
F 2	xxx											
T200	+201	+198	+198	+198	+198	+196	+194	+190	+186	+184	+181	+177
T160	+205	+202	+202	+202	+202	+200	+198	+193	+189	+186	+183	+179
T120	+209	+206	+206	+206	+206	+204	+201	+197	+192	+189	+185	+176
T 80	+213	+209	+210	+210	+209	+207	+205	+200	+195	+191	+187	+182
T 40	+219	+214	+216	+215	+214	+211	+208	+203	+197	+192	+187	+182
T 20	+221	+216	+218	+217	+216	+213	+209	+204	+197	+192	+186	+181
T 9	+222	+217	+220	+218	+217	+214	+210	+204	+198	+192	+186	+181
T 2	+225	+220	+223	+221	+219	+215	+210	+204	+197	+190	+184	+179
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	-000	+000	+000	+000	+000	-000	-000	-000	-000	-000	-000

240673

GMT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
034	037	028	021	025	024	022	025	025	011	010	008	006
020	021	008	003	008	006	011	019	019	013	006	005	007
001	359	351	352	359	360	008	015	016	011	007	004	009
102	105	102	096	099	094	088	071	062	051	050	054	064
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
U74	073	082	086	075	065	061	057	053	048	051	052	064
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
021	027	032	033	033	032	036	040	041	039	041	043	051
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
*165	+161	+164	+157	+155	+159	+160	+164	+171	+178	+183	+188	+192
*162	+160	+156	+154	+156	+160	+166	+174	+182	+188	+193	+197	+201
*163	+153	+159	+157	+155	+156	+162	+169	+178	+186	+192	+197	+201
*160	+160	+151	+154	+150	+151	+156	+164	+172	+181	+189	+195	+200
*140	+143	+141	+142	+148	+148	+157	+167	+176	+186	+194	+200	+204
*134	+135	+137	+140	+148	+148	+158	+170	+179	+188	+197	+203	+205
*132	+133	+135	+139	+148	+148	+159	+171	+180	+190	+198	+205	+211
*127	+128	+132	+137	+149	+160	+173	+184	+194	+204	+212	+218	+221
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

240673

+000

+000

240673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	014	016	013	010	015	023	026	025	024	031	037	042
D 80	011	011	009	008	011	019	018	014	024	027	031	040
D 10	012	009	008	009	011	015	015	012	012	022	022	023
F200	092	093	090	093	093	092	089	085	082	094	097	100
F160Z0	xxx											
F120Z0	xxx											
F 80	093	092	087	092	090	085	075	067	068	071	078	083
F 40Z0	xxx											
F 20Z0	xxx											
F 10	056	067	060	062	057	056	048	040	038	034	032	036
F 2	xxx											
T200	+202	+200	+201	+198	+193	+189	+187	+183	+176	+172	+170	+169
T160	+206	+205	+205	+202	+198	+193	+190	+186	+182	+188	+193	+197
T120	+210	+208	+209	+206	+201	+196	+193	+190	+181	+174	+171	+170
T 80	+214	+212	+213	+210	+205	+200	+196	+193	+184	+176	+173	+170
T 40	+219	+217	+217	+214	+210	+204	+199	+195	+186	+177	+173	+170
T 20	+223	+220	+220	+217	+212	+206	+201	+197	+187	+178	+172	+168
T 9	+225	+222	+222	+222	+218	+214	+207	+202	+197	+188	+178	+172
T 2	+230	+227	+226	+221	+216	+209	+203	+198	+187	+176	+170	+166
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+008	+000	+000	+000	+000	+000	+000	+000	+000	+000

250673

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

+000

250673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D 200	120 027	003 009	020 018	025 050	058 062	070 096	125 182	178 184	158 147	152 153	157 152	134 128
D 80	119 009	355 359	008 008	013 020	034 049	056 069	093 166	171 171	133 090	082 097	110 113	096
D 10	126 040	349 356	004 002	005 011	023 030	043 045	066 146	152 136	099 047	103 052	257 195	113 066
F 200	034 019	038 044	044 038	043 049	037 027	044 051	063 069	083 078	050 045	044 039	033 028	030 036
F 160ZO	xxx											
F 120ZO	xxx											
F 80	035 016	037 047	046 046	049 054	056 052	047 044	051 062	067 047	039 023	021 019	016 018	018 020
F 40ZO	xxx											
F 20ZO	xxx											
F 1u	029 014	030 038	034 032	024 021	021 021	017 017	022 030	027 013	014 009	008 005	004 003	000 009
F 2	xxx											
T 200	+226 +227	+225 +224	+224 +222	+221 +223	+224 +221	+217 +216	+213 +199	+207 +212	+211 +210	+204 +206	+202 +201	+200 +200
T 160	+230 +231	+229 +229	+228 +225	+222 +225	+227 +223	+219 +217	+213 +200	+209 +212	+212 +212	+204 +200	+198 +200	+202 +197
T 120	+234 +235	+233 +232	+231 +228	+224 +225	+229 +225	+221 +219	+213 +200	+209 +212	+212 +212	+204 +200	+197 +200	+202 +195
T 80	+237 +239	+237 +235	+234 +231	+227 +222	+226 +226	+223 +220	+219 +210	+209 +207	+212 +212	+204 +203	+197 +197	+197 +200
T 40	+242 +243	+242 +240	+237 +234	+227 +222	+220 +220	+211 +214	+214 +214	+201 +201	+202 +201	+197 +198	+199 +199	+200 +194
T 20	+245 +245	+244 +242	+239 +235	+226 +221	+218 +218	+214 +210	+204 +204	+200 +193	+193 +194	+196 +193	+194 +195	+193 +189
T 9	+247 +247	+245 +244	+241 +236	+226 +221	+217 +217	+212 +207	+200 +199	+198 +191	+189 +183	+181 +187	+179 +174	+175 +176
T 2	+250 +249	+248 +248	+243 +237	+226 +220	+213 +204	+198 +191	+189 +180	+180 +183	+175 +166	+166 +155	+150 +144	+141 +136
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

260673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	260673
134 157	149 156	171 171	200 222	218 201	149 116	113 120	105 118	115 147	164 147	152 203	157 131	D 200
111 126	143 148	173 193	159 132	147 128	119 102	100 111	108 119	103 118	160 158	141 182	180 120	D 80
202 222	155 221	309 309	062 073	123 126	112 125	084	096	117 100	114 131	165 136	166 109	D 10
037 029	026 025	019 017	009 006	009 008	009 009	015 011	016 019	020 020	020 020	026 020	026 023	F 200
xxx	F 160ZO											
xxx	F 120ZO											
020 018	026 020	012 009	009 011	012 011	010 014	014 016	016 019	018 017	018 025	015 019	019 019	F 80
xxx	F 40ZO											
xxx	F 20ZO											
006 003	002 001	007 005	010 008	012 013	011 010	013 014	014 015	014 016	017 016	017 021	013 018	F 10
xxx	F 2											
+200 +201	+200 +198	+197 +196	+198 +200	+198 +198	+198 +206	+212 +216	+220 +225	+230 +230	+234 +239	+241 +244	+247 +248	+250
+195 +202	+200 +200	+201 +198	+199 +200	+198 +195	+201 +210	+216 +220	+225 +230	+235 +235	+239 +244	+246 +249	+252 +253	+254
+195 +197	+195 +200	+195 +200	+199 +191	+191 +196	+205 +214	+221 +224	+229 +234	+239 +243	+248 +250	+253 +255	+255 +257	+258
+194 +195	+191 +195	+186 +184	+184 +187	+186 +191	+199 +207	+218 +224	+227 +232	+230 +234	+242 +246	+250 +253	+256 +258	+262
+187 +184	+179 +176	+174 +169	+169 +175	+193 +194	+203 +211	+222 +228	+232 +236	+241 +246	+250 +252	+257 +261	+263 +266	T 40
+172 +168	+168 +163	+163 +162	+167 +172	+185 +197	+205 +212	+222 +228	+230 +234	+243 +248	+252 +257	+260 +263	+268 +268	T 80
+159 +153	+151 +154	+158 +167	+173 +187	+199 +207	+217 +227	+234 +237	+237 +241	+246 +246	+251 +256	+260 +262	+266 +267	T 20
+134 +132	+132 +142	+154 +169	+174 +189	+201 +210	+220 +230	+230 +237	+240 +246	+249 +255	+260 +264	+264 +270	+275 +274	T 9
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 200
+001 +001	+001 -001	-000 +000	+000 -001	+000 +000	+000 -000	+000 +000	+000 -000	+000 +000	+000 -001	-000 -000	-000 -000	CT 20

260673

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	119 134	141 134	122 121	121 132	141 136	133 134	134 131	130 130	132 130	160 186	193 196	196 189
D 80	110 132	140 133	115 105	101 112	121 126	120 117	120 120	116 115	128 150	168 173	169 169	167
D 10	129 132	143 130	109 090	090 095	097 097	096 102	109 098	104 116	130 138	143 149	143 141	141
F 200	022 034	030 034	040 047	049 056	057 060	070 071	073 074	080 085	095 100	106 103	100 087	093 099
F 160ZO	xxx											
F 120ZO	xxx											
F 80	017 029	024 028	032 037	041 044	049 052	055 066	073 072	075 079	086 084	082 084	092 095	084 079
F 40ZO	xxx											
F 20ZO	xxx											
F 10	015 021	019 019	018 015	015 017	017 019	020 021	023 016	020 028	032 029	033 035	028 028	028
F 2	xxx											
T 200	+252 +253	+254 +254	+255 +255	+257 +256	+260 +260	+261 +261	+260 +260	+258 +250	+259 +259	+255 +252	+251 +251	+250 +247
T 160	+256 +257	+258 +258	+259 +259	+261 +261	+262 +263	+263 +263	+263 +263	+260 +260	+250 +250	+256 +256	+251 +251	+250 +248
T 120	+260 +261	+262 +262	+262 +262	+264 +264	+264 +266	+266 +265	+265 +265	+260 +260	+256 +256	+254 +254	+249 +249	+248 +238
T 80	+264 +265	+266 +266	+266 +266	+265 +265	+266 +267	+267 +267	+262 +262	+264 +264	+258 +258	+255 +255	+252 +252	+250 +248
T 40	+267 +268	+268 +269	+268 +268	+264 +264	+264 +263	+263 +261	+257 +257	+250 +249	+247 +247	+239 +239	+239 +239	+239 +229
T 20	+269 +269	+271 +269	+269 +267	+265 +265	+262 +260	+257 +257	+250 +249	+247 +243	+236 +236	+231 +225	+219 +214	+213 +208
T 9	+273 +273	+273 +270	+270 +268	+264 +261	+261 +257	+253 +253	+248 +243	+240 +240	+238 +238	+232 +229	+225 +213	+209 +206
T 2	+275 +275	+275 +268	+268 +265	+255 +255	+250 +250	+241 +241	+232 +233	+230 +227	+224 +224	+214 +214	+209 +209	+200 +193
CT 200	-001 -003	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-002 -001	-002 -002	-002 -002	-001 -001	-001 -001	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

270673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	270673
194 204	214 226	218 233	211 281	005 040	025 001	026 070	105 008	307 292	266 299	296 274	337	D 200
159 208	192 185	165 171	295 343	007 039	021 358	022 073	111 335	3				

280673												290673				CABA UW								
GMT	15-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03	
D 200	246	243	244	245	244	242	241	249	250	258	252	259	265	274	282	289	285	285	285	289	288	283	291	292
D 80	242	240	243	243	242	239	239	245	246	257	248	257	260	270	273	281	278	279	279	286	284	280	282	287
D 10	248	248	250	250	247	245	243	251	252	261	253	263	263	272	274	280	279	281	280	288	285	281	280	289
F 200	142	149	130	141	131	124	113	124	104	102	103	102	105	104	104	099	099	096	096	104	094	073	077	094
F 160ZO	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 120ZO	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	128	141	130	123	116	112	105	108	091	084	084	092	086	093	090	083	079	081	080	090	079	060	062	073
F 40ZO	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 20ZO	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	103	112	102	094	092	086	082	084	066	063	063	067	064	066	064	062	057	057	058	063	054	041	042	045
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
T 200	+183	+184	+180	+172	+169	+168	+167	+161	+157	+152	+149	+141	+135	+135	+133	+133	+132	+134	+137	+131	+129	+127	+126	+127
T 160	+187	+188	+184	+176	+172	+172	+171	+165	+160	+155	+153	+144	+139	+137	+135	+135	+134	+137	+140	+138	+134	+130	+130	+130
T 120	+191	+192	+188	+180	+176	+176	+174	+168	+164	+159	+157	+148	+142	+139	+137	+137	+138	+143	+147	+142	+137	+134	+133	+134
T 80	+195	+196	+192	+183	+180	+180	+178	+172	+168	+163	+160	+152	+146	+142	+140	+139	+138	+141	+144	+144	+141	+137	+136	+137
T 40	+199	+200	+198	+187	+184	+184	+182	+176	+172	+166	+164	+156	+150	+143	+142	+142	+141	+151	+155	+150	+144	+141	+140	+140
T 20	+201	+202	+198	+189	+186	+185	+183	+177	+173	+168	+165	+158	+152	+148	+147	+149	+149	+153	+156	+151	+146	+142	+142	+141
T 9	+203	+204	+199	+190	+187	+186	+184	+177	+173	+169	+166	+158	+152	+150	+146	+143	+145	+152	+152	+146	+143	+142	+142	+141
T 2	+204	+205	+200	+190	+188	+187	+184	+176	+172	+169	+165	+159	+153	+151	+149	+150	+150	+154	+157	+152	+145	+143	+142	+141
C 200	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	*	*	*	*	*	*	*	*	*	*	*	
CT 20	-000	-000	-000	+000	-000	-000	-000	+000	+000	+000	+000	+000	+001	+004	+006	+006	+004	+007	+002	-001	-000	-000	-000	

290673

290673

300673

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	270	268	267	270	270	274	279	274	269	258	254	254
D 80	273	272	269	270	275	282	283	284	275	265	247	245
D 10	277	279	277	275	280	287	288	289	283	274	259	262
F 200	082	082	084	084	069	082	070	064	054	057	076	085
F 160Z0	xxx											
F 120Z0	xxx											
F 80	081	078	083	081	061	060	065	053	046	045	058	056
F 40Z0	xxx											
F 20Z0	xxx											
F 10	067	068	066	066	049	049	046	036	027	023	027	019
F 2	xxx											
T 200	+168	+166	+165	+163	+161	+160	+158	+157	+158	+156	+153	+152
T 160	+173	+171	+170	+168	+165	+164	+161	+160	+161	+159	+157	+156
T 120	+177	+175	+173	+171	+168	+168	+164	+163	+165	+162	+159	+157
T 80	+181	+180	+177	+176	+172	+172	+168	+166	+168	+165	+161	+158
T 40	+185	+183	+181	+179	+176	+176	+171	+170	+171	+166	+162	+157
T 20	+188	+186	+184	+182	+178	+178	+173	+172	+171	+166	+161	+154
T 9	+191	+188	+187	+184	+180	+179	+174	+172	+171	+163	+157	+150
T 2	+198	+194	+191	+187	+181	+181	+174	+173	+167	+152	+144	+139
CT 200	-002	-002	-002	-001	-001	-001	-001	-000	-000	-000	-000	-000
CT 20	-001	-001	-001	-001	-000	-000	-000	+000	+000	+000	+000	+000

300673

300673

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
249	236	225	224	215	210	207	205	202	194	193	193	
207	203	214	204	200	205	204	201	194	185	189	181	
191	180	181	185	188	203	209	206	200	189	196	184	
U 48	021	052	054	051	047	047	042	036	035	033	029	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
U 01	065	055	062	053	040	030	033	035	036	034	032	029
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
U 25	026	024	025	026	028	030	032	035	031	029	026	022
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
*143	+135	+151	+130	+129	+129	+130	+128	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143	+135	+131	+130	+129	+129	+130	+130	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143	+135	+131	+130	+129	+129	+130	+130	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143	+135	+131	+130	+129	+129	+130	+130	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143	+135	+131	+130	+129	+129	+130	+130	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143	+135	+131	+130	+129	+129	+130	+130	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143	+135	+131	+130	+129	+129	+130	+130	+132	+138	+144	+149	+154
+137	+135	+131	+130	+129	+129	+130	+136	+142	+148	+154	+159	+159
+134	+132	+129	+126	+124	+124	+127	+132	+140	+146	+152	+157	+162
+130	+129	+126	+122	+122	+122	+125	+130	+136	+143	+150	+156	+162
+122	+121	+121	+122	+122	+122	+122	+125	+130	+136	+143	+150	+156
+119	+118	+118	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+116	+117	+116	+118	+118	+124	+130	+136	+143	+150	+156	+163	+170
+118	+117	+117	+126	+132	+132	+140	+148	+156	+164	+172	+178	+182
+112	+112	+112	+113	+117	+126	+132	+140	+148	+156	+164	+172	+178
+143</												

010773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW													
D 200	149	135	144	136	138	128	132	121	126	121	128	134	142	139	128	128	127	125	126	130	140	145	151	166	
D 80	150	134	140	134	134	119	120	111	110	108	116	123	127	121	116	118	118	118	120	126	127	126	132	144	
D 10	151	142	141	136	135	110	103	102	094	091	090	094	108	101	104	106	104	103	105	105	105	104	107	112	122
F 200	037	030	024	039	038	039	043	045	049	052	061	071	068	065	074	075	070	069	073	079	089	075	059	050	
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	032	026	021	035	032	030	032	040	041	049	055	059	068	068	080	087	092	092	089	084	084	079	079	073	
F 2020	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	028	021	017	024	020	016	015	016	016	015	017	021	020	019	019	020	022	022	022	024	026	028	025		
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+258	+260	+261	+261	+261	+260	+260	+260	+260	+261	+262	+262	+260	+260	+255	+257	+257	+257	+257	+258	+255	+248	+245	+237	
T 160	+262	+264	+265	+265	+264	+263	+263	+263	+264	+264	+264	+264	+264	+264	+265	+265	+265	+265	+265	+265	+265	+264	+261	+231	
T 120	+266	+268	+269	+268	+266	+267	+267	+266	+266	+267	+265	+266	+266	+266	+262	+258	+259	+260	+259	+259	+259	+256	+247	+241	+231
T 80	+270	+272	+272	+272	+271	+269	+269	+270	+268	+268	+268	+266	+265	+265	+260	+257	+254	+252	+248	+244	+247	+241	+233	+222	+215
T 40	+274	+275	+276	+275	+274	+271	+269	+269	+268	+268	+268	+266	+265	+265	+260	+257	+254	+252	+248	+244	+247	+241	+233	+222	+216
T 20	+276	+277	+278	+277	+274	+270	+267	+264	+263	+263	+258	+253	+247	+242	+236	+232	+226	+223	+219	+216	+214	+209	+205	+201	+195
T 9	+277	+278	+279	+277	+275	+271	+265	+258	+253	+248	+237	+225	+217	+222	+217	+213	+209	+206	+204	+202	+199	+196	+193	+190	+184
T 2	+278	+279	+279	+275	+271	+265	+258	+253	+248	+237	+225	+217	+217	+217	+213	+209	+206	+204	+202	+199	+196	+193	+190	+184	
C 1200	-001	-001	-001	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-001	-001	-001	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

020773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	020773												
190	202	197	195	194	194	196	203	207	205	196	192	167	154	144	151	147	148	156	162	167	180	198	231	D 200
153	156	143	166	159	158	158	165	160	176	176	172	160	157	142	153	147	145	152	154	163	177	197	231	D 80
121	130	129	128	129	137	146	151	147	165	166	168	163	157	147	156	152	148	156	151	167	184	208	238	D 10
044	04d	055	057	058	063	065	065	068	065	053	042	033	030	040	044	054	054	049	050	042	040	041	039	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0												
044	059	047	051	059	056	045	038	029	026	025	027	031	028	036	042	050	052	046	046	037	038	038	038	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10												
*244	+244	+250	+252	+250	+250	+248	+245	+246	+245	+234	+230	+235	+241	+247	+253	+257	+265	+265	+267	+268	+271	+273	+276	+276
+240	+244	+248	+250	+247	+245	+240	+247	+238	+226	+228	+236	+245	+252	+257	+262	+266	+269	+271	+273	+275	+278	+280	+280	T 200
+230	+234	+243	+242	+233	+230	+218	+223	+216	+221	+230	+239	+248	+256	+261	+267	+271	+274	+274	+276	+278	+282	+284	+284	T 160
+213	+213	+229	+212	+205	+198	+194	+203	+210	+221	+233	+243	+253	+260	+265	+270	+273	+277	+281	+283	+286	+288	+288	T 120	
+198	+197	+199	+193	+188	+186	+186	+192	+201	+212	+224	+236	+246	+256	+264	+268	+274	+277	+281	+284	+285	+288	+292	T 80	
+192	+187	+186	+186	+187	+189	+194	+203	+213	+224	+237	+248	+259	+266	+271	+276	+280	+284	+287	+291	+294	+294	+294	T 40	
+188	+186	+182	+184	+185	+185	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	+186	T 2	
+180	+174	+175	+180	+184	+189	+198	+206	+218	+231	+242	+254	+264	+272	+278	+283	+287	+291	+292	+293	+296	+298	+300	+299	T 2
-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
-000	+000	+001	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	030773	
280	280	291	283	279	275	269	262	252	243	243	243	243	243
262	265	270	271	268	270	273	274	272	265	242	240	245	245
226	223	245	263	248	275	278	281	282	267	250	253	253	253
062	062	098	091	094	091	059	047	037	049	058	058	058	058
xxx	xxx												
044	050	065	070	067	064	049	057	048	035	047	057	064	064
xxx	xxx												
016	015	017	025	035	047	039	046	043	032	042	034	054	054
xxx	xxx												
*177	+168	+169	+168	+165	+165	+162	+164	+167	+172	+180	+182	+181	xxx
+169	+168	+165	+162	+162	+167	+171	+177	+185	+187	+186	+188	+190	xxx
+167	+167	+168	+168	+165	+164	+167	+170	+175	+181	+188	+190	+194	xxx
+167	+167	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+168	+168	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+169	+169	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+167	+167	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+169	+169	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+167	+167	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+169	+169	+168	+168	+165	+164	+167	+170	+175	+181	+189	+190	+194	xxx
+167	+167												

30173

030777

卷之三

U 40 / 73

040773

040723

050 / 75

050773

050773

050773

860777

CARABIN

060/75

060773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
297 259	268 289	282 184	218 221	xxx	xxx	xxx	xxx	xxx	xxx	xxx	
321 243	271 345	059 182	199 212	xxx	xxx	xxx	xxx	xxx	xxx	xxx	D200
343 211	124 074	100 180	199 213	xxx	xxx	xxx	xxx	xxx	xxx	xxx	D 80
075 056	039 025	011 038	040 044	xxx	xxx	xxx	xxx	xxx	xxx	xxx	D 10
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0
068 029	020 020	022 044	028 030	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F120Z0
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0
032 020	013 015	016 028	015 017	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2
+200 +193	+203 +212	+213 +186	+193 +191	xxx	xxx	xxx	xxx	xxx	xxx	xxx	T200
+205 +191	+200 +205	+208 +187	+196 +194	xxx	xxx	xxx	xxx	xxx	xxx	xxx	T160
+203 +190	+201 +201	+201 +188	+197 +196	xxx	xxx	xxx	xxx	xxx	xxx	xxx	T120
+178 +186	+192 +201	+197 +188	+192 +194	xxx	xxx	xxx	xxx	xxx	xxx	xxx	T 80
+160 +167	+194 +193	+189 +188	+188 +191	+192	xxx	xxx	xxx	xxx	xxx	xxx	T 40
+161 +172	+189 +185	+166 +190	+193 +193	xxx	xxx	xxx	xxx	xxx	xxx	xxx	T 20
+161 +170	+177 +182	+182 +186	+190 +193	+194	xxx	xxx	xxx	xxx	xxx	xxx	T 9
+162 +170	+171 +173	+173 +183	+191 +193	+105	xxx	xxx	xxx	xxx	xxx	xxx	T 2
*	*	*	*	*	*	*	*	*	*	*	
+015 -000	-000 -000	-000 -000	-000 -000	-000 -001	xxx	xxx	xxx	xxx	xxx	xxx	CT200
+012 -001	-000 -000	-000 -000	-000 -000	-000 -000	xxx	xxx	xxx	xxx	xxx	xxx	CT 20

060173

070 / 73

070773

676773

030333

2020-2

080 / 73

080773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
344	350	348	342	350	353	351	358	359	360	002	003
337	334	342	337	336	346	351	360	356	001	002	360
327	333	336	324	335	345	352	001	355	002	002	359
083	078	039	078	078	075	063	063	061	062	056	055
xxx	047	048									
xxx	054	055									
xxx	060	062									
090	063	055	060	055	051	057	062	060	058	055	052
xxx	046	045									
xxx	054	054									
xxx	058	053									
U26	033	027	025	029	038	049	048	047	047	045	043
xxx	039	037									
130	+128	+129	+127	+125	+127	+128	+131	+134	+137	+138	+141
132	+134	+132	+131	+129	+130	+133	+136	+139	+143	+144	+145
135	+134	+134	+134	+134	+131	+132	+136	+139	+143	+147	+148
136	+135	+135	+135	+135	+132	+135	+140	+143	+147	+149	+152
136	+135	+134	+132	+134	+139	+144	+147	+150	+151	+153	+156
136	+136	+134	+132	+134	+132	+136	+140	+143	+147	+152	+155
135	+136	+134	+132	+134	+132	+136	+140	+143	+147	+152	+155
133	+135	+132	+130	+137	+130	+135	+140	+143	+147	+152	+155
000	-000	-000	-000	-000	-000	-001	-000	-001	-001	-001	-001
000	-020	+010	+000	+000	-000	-000	-001	-000	-000	-000	-000

080773

2005-5

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	0:9	015	018	018	015	016	014	021	025	027	032	040
D 80	023	015	018	018	015	015	013	019	023	025	029	039
D 10	021	015	015	018	011	015	011	018	019	020	019	023
F 200	052	062	071	071	079	087	090	086	086	096	090	090
F160Z0	xxx											
F12UZO	xxx	yyy	xxx									
F 80	047	059	068	071	077	084	088	077	072	078	071	071
F 40ZO	xxx											
F 20ZO	xxx											
F 10	037	045	051	049	049	057	055	046	046	035	031	028
F 2	xxx											
F 200	+103	+161	+159	+157	+154	+152	+149	+147	+144	+143	+141	+137
T 160	+168	+166	+164	+162	+159	+156	+153	+150	+147	+146	+144	+140
T 120	+172	+170	+168	+166	+163	+160	+157	+154	+151	+149	+147	+143
T 80	+176	+173	+172	+169	+166	+164	+161	+158	+155	+153	+150	+147
T 40	+180	+178	+176	+174	+171	+168	+165	+160	+154	+148	+144	+139
T 20	+183	+181	+179	+177	+173	+171	+168	+165	+160	+154	+148	+145
T 2	+191	+190	+184	+183	+177	+174	+168	+161	+151	+143	+137	+128
CT200	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-001	-000	+000	+000	-000	+000	+000	-000	-000	+000	+000

090 / 73

090773

100775

100773

110773

110773												110773				120773			CABAU					
GAT	15-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03	
D200	273	276	282	282	303	302	295	299	291	301	301	293	295	291	306	298	304	308	303	303	310	311	298	303
D 80	272	269	275	280	296	301	287	285	275	282	285	280	277	275	288	280	291	294	286	296	309	313	291	296
D 10	273	271	277	284	293	304	286	282	272	280	275	265	272	267	282	265	274	279	277	289	310	291	292	
F200	011	070	071	064	074	060	062	062	064	062	059	059	065	071	067	062	066	060	051	053	060	051	051	
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	070	065	068	051	058	049	045	048	051	047	045	047	051	057	048	047	052	045	044	042	046	051	047	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	052	053	050	037	040	032	029	029	033	024	025	025	025	026	018	021	024	022	024	023	027	032	028	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T200	+159	+161	+152	+151	+147	+147	+147	+144	+145	+142	+140	+145	+147	+149	+148	+145	+144	+142	+139	+139	+137	+137	+135	
T160	+161	+163	+159	+156	+150	+149	+150	+147	+147	+147	+146	+144	+142	+148	+152	+150	+148	+147	+145	+143	+143	+141	+140	
T120	+172	+174	+163	+160	+156	+155	+155	+155	+153	+155	+155	+154	+152	+152	+150	+149	+148	+146	+145	+143	+143	+141	+139	
T 80	+166	+168	+167	+163	+155	+154	+155	+154	+152	+153	+155	+153	+154	+152	+152	+150	+149	+148	+146	+145	+143	+141	+138	
T 40	+180	+182	+186	+186	+166	+163	+160	+162	+161	+156	+155	+156	+153	+151	+151	+152	+153	+152	+150	+148	+147	+145	+144	
T 20	+182	+185	+172	+168	+164	+162	+163	+162	+157	+156	+156	+156	+153	+151	+151	+154	+153	+152	+152	+151	+151	+150	+148	
T 9	+183	+186	+173	+159	+160	+158	+159	+157	+157	+156	+156	+153	+150	+151	+150	+152	+151	+152	+152	+151	+151	+149	+148	
T 2	+185	+188	+173	+169	+161	+159	+160	+159	+158	+157	+155	+150	+147	+149	+148	+144	+144	+147	+147	+147	+150	+147	+147	
	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*		
CT200	+009	+010	+002	+001	-000	-000	-000	-000	-000	-000	-000	-000	-002	-002	-000	-000	-000	-000	-000	-000	-000	-000		
CT 20	+010	+010	+000	-000	+005	+005	+005	+004	+001	+000	+000	-001	-002	-002	+000	+000	+001	+000	+000	+000	+000	+000		



## 100

150773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW	
D 200	115	125	133	197	241	273	235	244	245	241	238	237	239	235
D 80	102	110	120	182	234	228	225	238	242	234	218	216	221	208
D 10	102	110	125	172	232	227	228	244	246	239	215	214	215	197
F 200	099	078	069	074	107	091	109	105	089	079	070	078	066	059
F 160Z0	xxx	xxx												
F 120Z0	xxx	xxx												
F 80	061	164	056	052	091	062	086	086	067	058	059	065	049	046
F 40Z0	xxx	xxx												
F 20Z0	xxx	xxx												
F 10	046	038	035	032	060	039	063	058	044	036	036	039	027	023
F 2	xxx	xxx												
T 200	+155	+153	+154	+150	+140	+147	+147	+142	+142	+140	+135	+139	+141	+140
T 160	+157	+156	+159	+153	+143	+144	+149	+145	+145	+142	+138	+143	+141	+142
T 120	+159	+159	+160	+154	+146	+151	+151	+148	+147	+145	+144	+147	+148	+150
T 80	+151	+162	+162	+156	+148	+153	+153	+150	+150	+147	+141	+139	+141	+145
T 40	+165	+164	+165	+159	+159	+155	+155	+152	+152	+149	+148	+143	+142	+139
T 20	+164	+165	+166	+160	+151	+156	+156	+154	+153	+152	+149	+145	+144	+145
T 9	+165	+166	+166	+160	+160	+152	+156	+157	+154	+154	+151	+149	+145	+146
T 2	+166	+166	+167	+161	+152	+157	+158	+155	+154	+151	+150	+146	+144	+148
C 201	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
C 21	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

160773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	160773	
216	226	204	193	202	205	203	202	202	199	197	202	207	D 200
210	211	204	167	160	179	193	198	197	197	196	195	200	D 80
214	214	197	151	150	177	196	206	203	201	200	202	210	D 10
057	005	175	062	058	082	081	084	080	079	081	094	090	090
xxx	xxx												
xxx	xxx												
U 046	037	046	042	056	061	073	074	076	077	087	084	085	087
xxx	xxx												
xxx	xxx												
U 029	017	026	027	036	042	052	056	061	061	064	067	062	070
xxx	xxx												
+136	+136	+141	+138	+136	+136	+138	+143	+147	+150	+153	+158	+163	+167
+138	+137	+138	+136	+135	+138	+139	+138	+148	+155	+157	+163	+168	+172
+141	+139	+140	+139	+140	+144	+147	+151	+156	+159	+161	+167	+172	+176
+143	+142	+142	+140	+141	+144	+147	+151	+155	+162	+165	+170	+175	+179
+147	+146	+144	+141	+145	+148	+151	+155	+159	+163	+167	+170	+175	+180
+148	+145	+143	+147	+150	+153	+157	+161	+166	+170	+173	+178	+183	+188
+149	+148	+144	+143	+148	+151	+154	+158	+162	+167	+171	+174	+179	+185
+147	+144	+137	+141	+146	+146	+160	+160	+165	+170	+175	+177	+184	+189
-000	+000	+000	+001	+001	+001	+000	+001	+005	+000	+001	+001	+001	+001
+000	+011	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

160773

04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	160773	170773	CABA UW	
D 400	222	208	206	214	215	225	239	333	044	057	076	110	127	D 200
D 80	214	212	211	210	204	213	193	349	067	070	085	105	136	D 80
D 10	213	224	221	202	220	128	052	073	060	091	113	169	144	D 10
F 200	039	034	031	030	027	026	011	007	008	010	018	029	031	F 200
F 160Z0	xxx	xxx	xxx	F 200										
F 120Z0	xxx	xxx	xxx	F 160Z0										
F 80	037	032	031	025	019	023	008	005	010	011	016	025	025	F 80
F 40Z0	xxx	xxx	xxx	F 40Z0										
F 20Z0	xxx	xxx	xxx	F 20Z0										
F 10	034	029	027	022	016	017	007	005	008	009	010	023	021	F 10
F 2	xxx	xxx	xxx	F 2										
T 200	+169	+172	+173	+174	+175	+176	+175	+174	+174	+175	+177	+177	+172	T 200
T 160	+174	+176	+177	+177	+179	+179	+179	+178	+178	+178	+178	+178	+176	T 160
T 120	+178	+179	+181	+181	+182	+183	+182	+182	+182	+182	+182	+182	+182	T 120
T 80	+102	+184	+185	+185	+186	+187	+186	+185	+185	+185	+186	+186	+187	T 80
T 40	+186	+187	+188	+188	+189	+189	+188	+188	+188	+188	+188	+188	+187	T 40
T 20	+189	+190	+191	+192	+192	+192	+190	+189	+189	+189	+187	+187	+186	T 20
T 9	+191	+192	+192	+191	+193	+192	+190	+189	+189	+189	+187	+187	+186	T 9
T 2	+195	+196	+194	+192	+193	+191	+187	+188	+184	+179	+171	+171	+165	T 2
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

170773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	170773	
195	195	203	200	197	198	198	197	196	188	193	204	205	202
174	177	189	196	194	193	195	196	193	191	183	190	196	198
169	170	196	197	195	194	198	197	195	196	184	198	203	209
U 79	046	047	084	087	087	088	073	070	061	072	079	083	077
xxx	xxx												
xxx	xxx												
U 60	053	058	062	064	070	076	075	067	064	059	073	082	074
xxx	xxx												
xxx	xxx												
U 33	037	037	042	047	051	057	055	051	050	048	055	055	066
xxx	xxx												
xxx	xxx												
*119	+116	+116	+117	+117	+116	+114	+114	+116	+121	+123	+126	+130	+136
*122	+120	+121	+121	+119	+118	+118	+120	+125	+128	+130	+135	+140	+147
*124	+123	+122	+125	+122	+124	+129	+129	+134	+138	+144	+150	+151	+157
*126	+126	+128	+128	+127	+126	+126	+127	+132	+135	+138	+142	+147	

170773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	211	223	220	223	230	256	230	223	230	222	218	223
D 80	208	223	217	215	225	266	255	211	222	213	207	208
D 10	215	230	223	219	231	278	289	219	210	208	201	200
F200	093	079	084	078	072	058	039	057	074	072	063	070
F160Z0	xxx											
F120Z0	xxx											
F 80	085	077	077	066	062	052	024	031	059	060	064	066
F 40Z0	xxx											
F 20Z0	xxx											
F 10	C59	064	062	052	050	039	014	015	031	026	025	025
F 2	xxx											
T200	+156	+157	+152	+147	+130	+149	+150	+151	+154	+153	+150	+151
T160	+160	+162	+156	+154	+152	+153	+154	+158	+156	+153	+151	+151
T120	+163	+166	+160	+154	+157	+155	+160	+159	+155	+154	+153	+152
T 80	+167	+168	+163	+157	+161	+157	+163	+161	+157	+156	+154	+152
T 40	+171	+173	+167	+162	+165	+159	+156	+161	+164	+161	+154	+152
T 20	+173	+176	+170	+164	+167	+161	+158	+162	+164	+159	+152	+148
T 9	+174	+178	+171	+165	+167	+161	+158	+163	+163	+157	+150	+142
T 2	+175	+181	+173	+166	+168	+161	+160	+162	+159	+142	+138	+135
CT200	-000	-001	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000

180773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	180773
240	240	244	253	256	260	266	269	279	286	290	278	275
223	221	230	242	235	237	247	256	271	282	289	277	274
211	219	228	244	231	233	246	258	272	282	290	281	275
097	095	081	084	069	063	060	054	059	064	064	072	070
xxx												
055	053	056	054	057	051	048	050	047	057	060	061	070
xxx												
025	023	033	035	036	039	042	038	050	046	049	054	068
xxx												
*143	+139	+134	+134	+135	+135	+136	+136	+137	+138	+138	+139	+140
*141	+139	+136	+135	+136	+137	+139	+140	+141	+143	+142	+143	+145
*141	+140	+138	+137	+138	+140	+142	+144	+145	+147	+146	+147	+148
*141	+140	+140	+140	+142	+146	+148	+149	+151	+151	+153	+153	+155
*140	+141	+142	+143	+143	+144	+149	+151	+150	+151	+153	+153	+152
*140	+142	+143	+143	+144	+146	+154	+155	+156	+157	+157	+156	+160
*140	+141	+143	+143	+144	+146	+152	+154	+157	+158	+159	+160	+160
*138	+140	+142	+143	+143	+147	+153	+155	+159	+161	+158	+164	+166
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

180773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	180773
D200	287	283	289	292	289	284	280	274	276	266	249	240	237
D 80	288	285	291	293	285	283	280	272	273	250	241	237	234
D 10	293	286	292	295	286	286	283	273	255	228	220	219	223
F200	074	071	064	059	049	054	051	043	039	045	055	074	062
F160Z0	xxx												
F120Z0	xxx												
F 80	071	067	062	055	044	052	050	038	032	028	030	031	043
F 40Z0	xxx												
F 20Z0	xxx												
F 10	057	058	051	045	038	043	035	020	012	017	018	023	027
F 2	xxx												
T200	+150	+151	+149	+148	+148	+149	+149	+149	+147	+146	+145	+146	+147
T160	+155	+156	+154	+152	+152	+154	+153	+152	+150	+150	+149	+149	+152
T120	+159	+158	+156	+156	+156	+157	+156	+155	+153	+152	+151	+152	+154
T 80	+163	+164	+162	+160	+160	+162	+160	+160	+158	+158	+156	+156	+158
T 40	+168	+168	+167	+164	+164	+164	+164	+165	+159	+159	+159	+159	+160
T 20	+170	+171	+169	+167	+166	+165	+165	+162	+160	+160	+159	+160	+162
T 9	+172	+173	+171	+168	+167	+169	+165	+161	+158	+158	+157	+157	+160
T 2	+177	+176	+175	+170	+169	+164	+158	+153	+149	+144	+142	+143	+147
CT200	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000

190773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	190773
230	229	226	223	226	224	223	220	217	220	222	227	228	226
216	217	210	207	211	210	213	219	221	221	217	224	228	229
209	201	198	204	211	210	214	225	228	226	221	226	234	235
086	094	095	104	106	101	088	097	091	096	102	103	117	104
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
062	064	064	072	070	075	073	083	085	091	099	100	110	105
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
028	027	028	034	040	049	055	056	068	072	071	075	081	088
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
*134	*133	*133	*132	*135	*135	*137	*138	*142	*146	*147	*148	*152	*153
*136	*135	*135	*136	*136	*138	*141	*145	*150	*151	*152	*157	*159	*160
*137	*137	*136	*135	*137	*140	*144	*149	*154	*155	*155	*161	*163	*166
*138	*137	*136	*136	*137	*142	*147	*153	*158	*159	*160	*165	*167	*170
*139	*135	*135	*139	*141	*145	*151	*157	*162	*163	*165	*170	*174	*178
*137	*132	*134	*140	*142	*147	*153	*159	*160	*165	*167	*170	*174	*178
*136	*131	*134	*140	*142	*148	*154	*160	*165	*166	*167	*170	*174	*178
*132	*125	*133	*140	*142	*148	*156	*161	*167	*169	*170	*174	*180	*183
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

190773

<table border="

190773

190773

200773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	213	214	220	213	206	211	217	217	219	220	225	225
D 80	209	207	221	212	199	203	210	210	211	217	215	222
D 10	212	210	227	217	203	207	214	213	213	221	217	227
F200	104	129	134	129	122	131	132	124	121	112	113	131
F160Z0	xxx											
F120Z0	xxx											
F 80	095	097	116	102	089	101	104	095	096	086	089	100
F 40Z0	xxx											
F 20Z0	xxx											
F 10	070	061	089	072	058	065	073	063	064	059	056	067
F 2	xxx											
T200	+163	+133	+132	+135	+137	+139	+145	+147	+151	+152	+153	+152
T160	+166	+145	+147	+138	+139	+141	+147	+149	+145	+147	+156	+155
T120	+170	+148	+150	+141	+141	+143	+149	+155	+156	+158	+159	+158
T 80	+174	+152	+154	+143	+144	+145	+151	+157	+159	+161	+162	+161
T 40	+178	+154	+158	+146	+147	+153	+160	+162	+164	+165	+164	+164
T 20	+180	+160	+164	+147	+147	+148	+154	+156	+162	+165	+166	+166
T 9	+180	+166	+161	+150	+148	+149	+155	+157	+154	+165	+166	+164
T 2	+181	+156	+161	+152	+149	+150	+156	+158	+163	+164	+165	+162
*	*	*	*	*	*	*	*	*	*	*	*	*
CT200	-000	-011	-020	-000	-000	-000	+004	+005	+006	+000	-000	-000
CT 20	-000	-007	-015	-000	-000	-000	+004	-001	+001	+000	-000	-000

200773

200773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
241	236	233	230	220	215	218	216	217	216	214	215
229	225	223	219	216	206	210	211	216	214	215	217
230	228	221	219	208	212	214	221	221	223	228	229
125	119	118	113	100	100	109	107	107	094	092	102
xxx											
xxx											
096	087	081	075	078	089	085	086	078	087	097	092
xxx											
xxx											
065	061	055	053	053	054	060	057	060	067	073	075
xxx											
*134	*134	*131	*131	*128	*127	*124	*124	*128	*129	*142	*143
*137	*135	*131	*131	*130	*128	*127	*129	*138	*146	*147	*149
*139	*136	*133	*134	*133	*128	*129	*131	*140	*150	*151	*153
*141	*139	*136	*136	*138	*136	*130	*131	*134	*142	*154	*157
*143	*141	*138	*141	*139	*132	*134	*137	*145	*158	*159	*161
*144	*141	*139	*143	*141	*134	*135	*139	*146	*161	*161	*165
*143	*141	*138	*140	*144	*143	*135	*136	*140	*162	*162	*165
*141	*139	*136	*140	*144	*143	*135	*136	*140	*164	*164	*168
*	*	*	*	*	*	*	*	*	*	*	*
-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
*000	+000	+000	+000	+000	+000	+001	+001	+000	+002	+000	+000

200773

200773

210773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	221	215	xxx	xxx	237	213	220	217	203	191	163	152
D 80	209	210	217	224	237	208	214	207	185	163	137	126
D 10	214	214	221	229	238	211	212	186	144	120	115	101
F200	101	082	xxx	xxx	073	065	061	050	043	034	043	050
F160Z0	xxx											
F120Z0	xxx											
F 80	073	071	067	068	067	060	044	033	030	028	040	054
F 40Z0	xxx											
F 20Z0	xxx											
F 10	057	055	052	055	059	042	029	017	016	016	020	021
F 2	xxx											
T200	+155	+154	+159	+163	+166	+163	+162	+167	+165	+167	+151	+112
T160	+171	+158	+163	+178	+171	+167	+165	+166	+167	+168	+168	+159
T120	+173	+166	+166	+171	+175	+170	+169	+168	+170	+172	+171	+161
T 80	+160	+165	+170	+175	+176	+174	+172	+171	+171	+172	+173	+162
T 40	+176	+169	+173	+178	+182	+177	+174	+173	+171	+172	+175	+176
T 20	+173	+171	+175	+181	+185	+179	+175	+173	+169	+165	+165	+162
T 9	+180	+173	+177	+182	xxx	+176	+172	+168	+166	+165	+164	+164
T 2	+182	+174	+179	+184	xxx	+175	+168	+162	+157	+158	+158	+149
*	*	*	*	*	*	*	*	*	*	*	*	*
CT200	+003	xxx	xxx	xxx	-001	-001	-000	-000	-000	-000	-000	-000
CT 20	+008	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

210773

210773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
219	221	220	221	220	222	233	235	243	246	256	256
218	217	218	216	215	225	227	234	236	250	250	252
217	222	222	220	217	227	229	235	238	252	252	251
134	127	111	122	121	113	118	118	104	087	081	089
xxx											
xxx											
101	100	088	095	097	088	091	087	077	074	079	076
xxx											
xxx											
066	065	058	066	070	057	071	070	065	057	060	055
xxx											
*124	*117	*118	*115	*118	*124	*127	*130	*135	*138	*142	*144
*127	*120	*120	*117	*117	*122	*124	*131	*138	*142	*146	*148
*130	*127	*122	*119	*119	*129	*133	*136	*142	*146	*148	*150
*133	*124	*124	*124	*125	*124	*134	*136	*145	*149	*154	*155
*135	*126	*126	*124	*134	*134	*136	*140	*145	*149	*154	*155
*136	*128	*127	*125	*134	*134	*136	*140	*145	*157	*159	*160
*136	*133	*128	*125	*139	*141	*145	*151	*156	*160	*165	*163
*136	*133	*128	*126	*127	*139	*143	*148	*154	*162	*165	*168
*	*	*	*	*	*	*	*	*	*	*	*
-000	-002	-000	-002	-000	-000	-000	-000	-001	-001	-001	-001
+000	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

210773

03-04	04

210773

210773

220773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	251	254	249	256	257	261	263	251	246	240	246	241
D 80	250	256	248	255	258	261	263	250	248	243	235	239
D 10	254	261	252	256	260	264	267	253	249	246	233	227
F 200	082	088	082	087	082	079	078	099	109	115	107	105
F 160Z0	xxx											
F 120Z0	xxx											
F 80	077	080	075	082	067	068	058	077	079	082	081	071
F 40Z0	xxx											
F 20Z0	xxx											
F 10	062	067	060	069	052	053	041	049	052	048	047	039
F 2	xxx											
T 200	+167	+164	+164	+164	+162	+163	+162	+161	+160	+157	+153	+151
T 160	+172	+169	+168	+169	+166	+167	+165	+164	+163	+160	+156	+151
T 120	+176	+172	+172	+169	+171	+168	+167	+166	+162	+159	+155	+153
T 80	+180	+177	+176	+176	+173	+174	+171	+170	+168	+165	+161	+157
T 40	+184	+180	+180	+176	+177	+174	+171	+170	+166	+162	+156	+154
T 20	+186	+182	+182	+182	+178	+179	+176	+171	+170	+165	+160	+153
T 9	+189	+184	+183	+183	+179	+179	+176	+170	+169	+162	+157	+150
T 2	+192	+187	+185	+185	+179	+179	+174	+166	+166	+155	+152	+144
CT 200	-001	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000
CT 20	-001	-001	-000	-000	-001	-000	+000	+000	+000	-000	+000	+000

220773

220773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
216	216	222	224	224	224	219	212	213	217	220	221
208	208	214	216	219	223	221	215	219	221	223	225
206	204	213	218	221	224	225	217	224	224	230	230
117	113	117	114	104	096	092	090	094	105	101	094
xxx	112	112									
xxx	114	118									
085	078	080	079	076	068	077	076	081	095	092	093
xxx	108	109									
xxx	109	113									
045	043	044	048	053	046	059	060	064	078	080	083
xxx	062	079									
+118	+117	+117	+117	+119	+123	+127	+131	+135	+138	+143	+146
+120	+118	+119	+119	+122	+127	+131	+134	+140	+142	+148	+151
+121	+121	+121	+122	+125	+130	+134	+138	+143	+145	+151	+154
+122	+122	+123	+124	+126	+128	+134	+138	+142	+147	+150	+155
+123	+123	+124	+127	+129	+132	+138	+142	+146	+152	+155	+159
+123	+124	+124	+125	+128	+131	+134	+140	+145	+149	+155	+158
+123	+124	+125	+125	+129	+131	+134	+140	+145	+149	+155	+160
+121	+123	+124	+124	+129	+132	+135	+144	+149	+151	+152	+154
-000	-000	-000	-000	-000	-000	-001	-001	-001	-001	-001	-001
*000	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	-000

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	272	287	285	286	283	282	281	281	278	274	277	287
D 80	268	282	285	282	280	276	275	277	275	271	260	261
D 10	269	282	285	281	280	275	273	278	275	267	249	247
F 200	116	107	094	103	097	089	077	071	079	088	076	075
F 160Z0	xxx											
F 120Z0	xxx											
F 40Z0	xxx											
F 20Z0	xxx											
F 10	090	078	068	075	063	051	040	038	038	028	024	031
F 2	xxx											
T 200	+143	+140	+139	+138	+136	+133	+135	+132	+132	+133	+130	+130
T 160	+147	+143	+143	+142	+140	+137	+135	+135	+135	+136	+130	+130
T 120	+151	+147	+147	+145	+144	+140	+139	+139	+139	+138	+136	+135
T 80	+156	+151	+151	+150	+147	+144	+142	+142	+141	+141	+139	+135
T 40	+160	+155	+155	+154	+151	+147	+145	+145	+144	+140	+138	+138
T 20	+163	+158	+158	+156	+151	+147	+145	+145	+144	+140	+139	+139
T 9	+165	+159	+159	+157	+153	+149	+147	+147	+144	+138	+136	+136
T 2	+168	+161	+161	+158	+153	+148	+146	+146	+141	+132	+124	+124
CT 200	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
223	219	222	241	244	248	256	245	248	261	267	276	269
213	208	209	215	221	224	230	233	240	261	266	276	275
212	202	202	207	213	224	229	229	242	264	266	278	270
082	077	095	101	100	068	085	072	068	084	090	087	091
xxx	xxx											
xxx	xxx											
083	071	076	077	063	067	066	057	062	078	083	084	086
xxx	xxx											
xxx	xxx											
049	035	032	032	041	051	052	053	064	066	072	067	070
xxx	xxx											
*092	*106	*108	*115	*114	*118	*121	*120	*123	*127	*128	*130	*130
*087	*092	*110	*114	*112	*121	*123	*128	*131	*133	*135	*135	*136
*091	*108	*113	*110	*115	*120	*126	*131	*135	*136	*138	*140	*141
*095	*102	*115	*111	*110	*116	*122	*129	*135	*139	*141	*142	*141
*099	*096	*106	*109	*110	*118	*125	*133	*139	*143	*144	*145	*145
*101	*096	*099	*102	*102	*120	*128	*135	*142	*145	*147	*147	*147
*101	*096	*105	*107	*111	*121	*129	*136	*143	*147	*148	*150	*150
*103	*095	*098	*101	*106	*114	*120	*137	*147	*149	*151	*154	*156
*016	-003	-000	-000	-000	-001	-001	-001	-001	-001	-002	-001	-001
*000	-004	-003	-006	-000	+002	-000	-000	-001	-001	-001	-000	-000

230773

230773

240773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	304	307	307	311	315	315	313	308	310	305	301	305
D 80	301	306	307	311	314	314	314	306	303	296	287	285
D 10	301	306	307	314	317	316	314	306	293	295	281	290
F 200	074	072	069	066	065	065	060	060	061	059	057	062
F 160Z0	xxx											
F 120Z0	xxx											
F 80	071	069	065	064	064	063	058	051	053	054	049	053
F 40Z0	xxx											
F 20Z0	xxx											
F 10	061	058	056	054	051	047	037	028	023	023	018	021
F 2	xxx											
T 200	+137	+137	+137	+136	+134	+132	+129	+128	+126	+125	+125	+125
T 160	+142	+142	+142	+140	+138	+136	+133	+132	+130	+128	+128	+126
T 120	+146	+145	+145	+144	+142	+140	+137	+135	+133	+132	+128	+127
T 80	+150	+150	+150	+148	+146	+144	+141	+138	+135	+134	+134	+133
T 40	+155	+154	+154	+152	+150	+148	+144	+142	+139	+136	+130	+128
T 20	+158	+157	+157	+155	+152	+150	+145	+140	+134	+134	+124	+124
T 9	+160	+159	+158	+156	+153	+150	+144	+138	+132	+127	+125	+120
T 2	+165	+164	+162	+158	+155	+150	+142	+131	+123	+117	+110	+107
CT 200	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

240/73

240773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
304	308	310	304	303	302	302	292	293	293	296	290
290	287	287	288	285	283	282	289	291	291	296	290
266	267	267	267	275	278	275	275	293	292	294	287
288	286	286	288	284	284	285	286	288	271	274	289
290	286	286	288	284	284	285	286	288	274	277	289
260	267	267	267	275	278	275	275	293	292	294	287
064	030	C76	081	078	076	073	057	059	058	050	048
xxx											
xxx											
063	064	062	067	069	063	044	047	056	058	052	048
xxx											
027	031	029	030	032	030	028	042	047	049	045	043
xxx											
+123	+123	+123	+124	+124	+124	+122	+124	+127	+129	+132	+135
+126	+125	+124	+126	+127	+127	+126	+129	+132	+134	+137	+140
+127	+126	+125	+127	+129	+129	+126	+129	+133	+136	+138	+140
+125	+126	+124	+126	+128	+127	+127	+133	+137	+140	+142	+146
+119	+120	+119	+120	+119	+121	+121	+129	+137	+141	+144	+145
+116	+114	+114	+113	+115	+122	+122	+131	+137	+141	+144	+146
+115	+111	+110	+111	+115	+122	+122	+133	+140	+145	+151	+153
+111	+103	+109	+104	+113	+123	+135	+143	+149	+153	+157	+158
+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

240773

240773

250773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	305	308	310	311	316	313	310	315	318	319	318	315
D 80	xxx	xxx	xxx	xxx	314	313	304	315	313	314	318	315
D 10	303	307	307	310	312	314	301	310	309	305	289	303
F 200	063	061	061	058	059	057	054	047	050	045	042	039
F 160Z0	xxx											
F 120Z0	xxx											
F 80	xxx											
F 40Z0	xxx											
F 20Z0	xxx											
F 10	050	049	051	049	048	044	036	022	021	020	014	014
F 2	xxx											
T 200	+152	+151	+150	+148	+145	+143	+141	+138	+136	+133	+131	+129
T 160	+157	+155	+154	+152	+149	+147	xxx	xxx	xxx	+138	+141	+143
T 120	+160	+159	xxx	xxx	xxx	+148	+145	+143	+142	+139	+137	+134
T 80	+165	+164	+164	+162	+160	+156	+154	+152	+150	+149	+147	+145
T 40	+169	+169	+169	+166	+164	+164	+160	+158	+156	+153	+150	+148
T 20	+172	+171	+169	+166	+163	+163	+157	+152	+146	+141	+136	+133
T 9	+173	+172	+170	+167	+163	+163	+157	+151	+144	+138	+132	+128
T 2	+170	+177	+173	+170	+165	+165	+156	+146	+136	+127	+119	+115
CT 200	xxx											
CT 20	xxx	xxx	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

250/73

250773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	305	308	310	311	316	313	310	315	318	319	318	315
D 80	xxx	xxx	xxx	xxx	314	313	304	315	313	314	318	315
D 10	301	307	307	310	312	314	301	310	309	305	301	304
F 200	060	062	062	062	056	057	061	061	065	072	079	081
F 160Z0	xxx											
F 120Z0	xxx											
F 80	xxx											
F 40Z0	xxx											
F 20Z0	xxx											
F 10	011	011	015	019	024	024	030	042	047	049	052	049
F 2	xxx											
+126	+126	+126	+127	+128	+127	+129	+132	+135	+137	+130	+141	+142
+129	+129	+129	+130	+130	+131	+130	+133	+136	+139	+141	+142	+145
+132	+132	+132	+133	+133	+133	+131	+137	+140	+143	+145	+146	+147
+134	+134	+134	+134	+134	+134	+134	+141	+145	+148	+150	+151	+153
+136	+135	+134	+134	+134	+134	+131	+141	+145	+148	+150	+151	+154
+111	+109	+110	+113	+119	+129	+140	+148	+151	+154	+157	+162	+163
+100	+098	+097	+098	+097	+107	+119	+130	+141	+148	+152	+156	+159
+086	+082	+083	+099	+118	+131	+143	+151	+156	+161	+166	+169	+170
*	*	*	*	*	*	*	*	*	*	*	*	*
+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+001	+001	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000

CT 200

CT 20

250773

250773

260773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D200	304	310	307	310	310	308	309	308	313	314	318	312	310	314	311	322	316	310	305	30F	303	302	297		
D 80	303	308	307	308	309	305	308	306	307	305	311	301	301	310	304	306	320	311	298	296	303	296	293	292	
D 10	303	307	307	308	305	308	305	305	305	299	303	295	293	308	302	303	318	307	289	290	299	294	288	289	
F200	099	107	107	100	094	102	098	096	101	102	121	108	101	109	108	129	128	106	102	105	107	108	108		
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	099	101	103	098	098	091	085	082	078	076	080	065	070	079	079	083	095	082	071	078	082	082	084	087	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	080	079	078	072	065	065	058	057	053	050	053	037	043	049	049	056	062	046	040	047	053	052	054	057	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
T200	+144	+140	+139	+140	+139	+138	+138	+137	+124	+124	+123	+127	+132	+135	+124	+124	+117	+125	+134	+133	+130	+130	+129	+127	
T160	+148	+144	+143	+143	+142	+142	+141	+141	+141	+142	+126	+124	+128	+130	+137	+127	+127	+120	+131	+136	+136	+134	+133	+133	+130
T120	+152	+148	+147	+147	+146	+146	+145	+144	+130	+129	+126	+130	+131	+135	+130	+131	+123	+127	+138	+139	+137	+136	+135	+133	
T 80	+157	+152	+151	+152	+150	+150	+148	+148	+141	+131	+131	+128	+131	+133	+137	+132	+133	+125	+129	+139	+141	+140	+139	+138	+136
T 40	+162	+157	+155	+156	+154	+153	+152	+151	+133	+133	+130	+133	+136	+143	+135	+137	+128	+127	+131	+141	+143	+142	+140	+139	
T 20	+165	+159	+158	+156	+155	+153	+152	+151	+134	+135	+131	+134	+137	+141	+136	+138	+135	+139	+141	+144	+144	+143	+142	+140	
T 9	+168	+160	+160	+160	+157	+156	+153	+153	+134	+135	+131	+134	+137	+136	+125	+136	+130	+128	+132	+134	+144	+144	+143	+142	
T 2	+173	+162	+162	+162	+158	+157	+153	+152	+134	+135	+132	+134	+137	+126	+127	+130	+128	+132	+134	+143	+142	+141	+140		
CT200	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 20	-000	+000	-000	+000	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	

260773

260773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
300	306	312	315	316	314	316	311	312	314	314	316	316	317	313	314	318	311	308	306	305	311	313	D200	
292	297	309	311	313	310	316	306	305	311	312	313	317	315	312	310	317	310	308	304	305	307	309	D 80	
289	271	307	308	311	309	317	304	303	310	310	311	319	315	312	313	308	318	311	309	304	306	305	307	D 10
106	112	113	121	122	120	106	115	112	111	116	108	095	114	110	118	114	122	119	135	116	121	118	120	F200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0											
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F120Z0											
082	015	280	093	092	089	083	094	089	095	092	083	083	102	097	097	096	114	110	119	108	106	101	105	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0											
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0											
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10											
*122	+124	+124	+123	+122	+122	+119	+124	+118	+116	+124	+136	+118	+115	+114	+129	+130	+120	+112	+117	+120	+115	+115	+115	+115
*125	+127	+126	+125	+125	+126	+125	+125	+129	+120	+120	+127	+140	+122	+119	+122	+133	+133	+123	+116	+120	+122	+123	+123	+123
*128	+128	+126	+127	+130	+128	+127	+127	+127	+132	+124	+124	+131	+143	+125	+122	+119	+132	+137	+127	+120	+123	+125	+120	+120
*130	+130	+130	+129	+129	+129	+130	+130	+130	+136	+128	+128	+135	+148	+129	+125	+124	+125	+124	+120	+123	+124	+120	+120	+120
*139	+136	+132	+132	+131	+132	+132	+132	+132	+130	+130	+136	+136	+136	+136	+136	+136	+136	+136	+136	+136	+136	+136	+136	+136
*141	+138	+133	+133	+132	+132	+133	+134	+134	+131	+130	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132
*141	+138	+133	+133	+133	+133	+134	+134	+134	+131	+130	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132
*141	+138	+133	+133	+133	+133	+134	+134	+134	+131	+130	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132	+132
*140	+138	+134	+134	+134	+135	+136	+136	+136	+134	+134	+139	+125	+125	+125	+125	+125	+125	+125	+125	+125	+125	+125	+125	+125
*000	-000	-000	-000	-000	-000	-000	-000	-003	-003	-002	-002	-003	-004	-004	-001	-011	-002	-002	-002	-002	-000	-000	-005	-005
*000	+001	+000	+000	+000	+000	+000	+000	-005	-003	-001	-000	-000	-000	-002	-000	-009	+009	+002	+010	+007	+000	-003	-011	+000

260773	260773	270773	CABA UW
108	113	113	113
117	118	117	117
122	123	122	122
126	127	126	126
131	132	131	131
136	137	136	136
141	142	141	141
146	147	146	146
151	152	151	151
156	157	156	156
161	162	161	161
166	167	166	166
171	172	171	171
176	177	176	176
181	182	181	181
186	187	186	186
191	192	191	191
196	197	196	196
201	202	201	201
206	207	206	206
211	212	211	211
216	217	216	216
221	222	221	221
226	227	226	226
231	232	231	231
236	237	236	236
241	242	241	241
246	247	246	246
251	252	251	251
256	257	256	256
261	262	261	261
266	267	266	266
271	272	271	271
276	277	276	276
281	282	281	281
286	287	286	286
291	292	291	291
296	297	296	296
301	302	301	301
306	307	306	306
311	312	311	311
316	317	316	316
321	322	321	321
326	327	326	326</

270773

270773

280773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	307	302	297	299	310	309	311	317	320	326	336	336
D 80	300	299	291	293	299	298	302	308	315	318	330	329
D 10	298	298	299	291	295	294	298	304	312	315	329	328
F200	106	109	119	117	116	112	116	121	128	126	130	113
F160Z0	xxx											
F120Z0	xxx											
F 80	091	090	095	095	092	084	089	090	098	096	095	095
F 40Z0	xxx											
F 20Z0	xxx											
F 10	070	064	071	067	063	057	059	058	063	061	066	054
F 2	xxx											
T200	*114	*114	*116	*119	*123	*126	*129	*132	*134	*136	*138	*138
T160	*116	*117	*118	*121	*125	*128	*131	*133	*136	*137	*139	*140
T120	*119	*119	*121	*123	*127	*130	*133	*135	*138	*139	*141	*142
T 80	*121	*122	*123	*126	*129	*132	*135	*137	*139	*141	*142	*142
T 40	*124	*124	*126	*128	*131	*135	*137	*139	*141	*143	*145	*146
T 20	*126	*126	*128	*130	*133	*136	*138	*140	*142	*144	*146	*147
T 9	*127	*127	*128	*130	*133	*136	*139	*140	*143	*144	*146	*148
T 2	*129	*129	*130	*132	*135	*137	*139	*141	*143	*144	*146	*147
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	-000	+000	-000	+000	+000	+000	+000	+000	+000	+000	-000

280773

280773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
360	360	356	356	355	358	355	353	352	354	355	001
349	346	344	345	348	352	355	350	381	349	352	352
345	341	339	340	344	351	355	352	347	348	350	358
098	087	084	087	078	073	072	065	059	056	054	047
xxx											
xxx											
074	059	058	058	056	050	061	057	051	050	047	042
xxx											
xxx											
046	033	033	032	029	038	038	042	040	043	045	036
xxx											
*144	*144	*145	*144	*144	*144	*146	*147	*149	*151	*156	*156
*147	*147	*147	*147	*148	*149	*150	*152	*155	*159	*163	*167
*148	*148	*148	*150	*150	*151	*152	*154	*156	*159	*163	*167
*149	*149	*152	*152	*153	*155	*156	*157	*160	*163	*167	*171
*156	*154	*155	*156	*156	*158	*159	*161	*164	*167	*171	*171
*157	*155	*156	*156	*157	*160	*161	*162	*165	*169	*174	*178
*152	*152	*153	*153	*153	*155	*156	*161	*164	*167	*171	*171
*156	*156	*156	*157	*157	*160	*161	*164	*167	*170	*174	*178
*158	*158	*158	*161	*162	*167	*170	*173	*178	*180	*184	*184
*000	-000	-000	-000	-002	-001	-001	-000	-000	-000	-000	-000
+000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000

280773

280773

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	330	331	328	326	329	338	327	328	328	339	349	007
D 80	324	325	321	322	320	320	314	312	309	318	334	006
D 10	323	323	320	322	319	316	312	308	305	314	323	008
F200	080	076	077	074	070	069	070	073	076	078	073	075
F160Z0	xxx											
F120Z0	xxx											
F 80	080	074	077	074	067	060	082	054	057	059	063	053
F 40Z0	xxx											
F 20Z0	xxx											
F 10	066	063	062	053	043	047	046	033	032	030	022	026
F 2	xxx											
T200	*184	*184	*179	*175	*172	*173	*166	*161	*165	*163	*164	*173
T160	*188	*182	*178	*175	*171	*166	*165	*162	*163	*165	*167	*172
T120	*192	*191	*186	*182	*179	*173	*168	*165	*168	*168	*171	*176
T 80	*197	*198	*191	*186	*182	*176	*172	*168	*166	*160	*159	*159
T 40	*201	*200	*195	*191	*186	*180	*176	*171	*169	*164	*160	*160
T 20	*204	*203	*198	*193	*189	*182	*178	*174	*170	*169	*166	*166
T 9	*206	*205	*199	*194	*190	*183	*178	*174	*171	*169	*166	*165
T 2	*209	*208	*202	*197	*191	*184	*179	*173	*170	*169	*166	*167
CT200	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

290773

290773

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
001	358	359	002	357	360	359	001	006	003	359	003
357	350	351	355	354	355	002	357	007	008	357	002
355	349	349	353	352	003	358	007	005	357	001	003
068	068	072	065	064	071	070	067	072	063	058	054
xxx											
xxx											
063	061	066	059	059	069	071	062	071	060	060	057
xxx											
xxx											
049	044	047	045	043	050	051	047	050	046	045	044
xxx											
*138	*137	*133	*132	*129	*128	*130	*133	*131	*138	*140	*141
*140	*138	*135	*134	*132	*130	*134	*139	*140	*141	*142	*142
*143	*137	*137	*136	*134	*133	*132	*136	*144	*144	*145	*145
*146	*143	*141	*140	*139	*136	*134	*134	*137	*145	*148	*149
*150	*147	*145	*143	*142	*141	*143	*146	*149	*153	*154	*154
*152	*149	*147	*145	*145	*142	*143	*146	*149	*153	*156	*156
*153	*150	*148	*146	*143	*144	*146	*149	*153	*157	*159	*161
*153	*151	*148	*147	*146	*145	*148	*151	*155	*160	*161	*162
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

CABA UW

330773

290773

三

500 / 73

300773

300/73

GMT	300773												310773			CABA UW
	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03.				
D 200	030	026	052	072	061	049	075	030	029	036	031	022	018	026	040	040
D 80	034	024	049	074	068	057	086	034	026	038	038	022	012	014	023	030
D 10	032	024	043	071	059	065	080	024	021	029	026	017	045	035	023	017
F 200	035	034	038	035	036	028	021	033	059	060	058	057	068	078	073	073
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	032	031	038	035	043	027	019	026	044	048	045	043	051	058	058	056
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 10	023	022	028	025	024	018	012	012	020	022	016	014	016	017	015	018
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
T 200	+153	+157	+157	+156	+157	+157	+155	+153	+151	+151	+150	+148	+148	+148	+146	+140
T 160	+157	+161	+160	+160	+161	+159	+157	+154	+154	+153	+151	+151	+150	+148	+145	+140
T 120	+161	+165	+164	+164	+164	+163	+160	+158	+157	+156	+154	+154	+153	+151	+149	+142
T 80	+165	+169	+168	+168	+169	+166	+164	+161	+160	+159	+157	+156	+154	+149	+142	+139
T 40	+169	+173	+172	+172	+172	+169	+167	+164	+161	+159	+157	+156	+154	+151	+143	+141
T 20	+171	+175	+174	+175	+174	+174	+171	+169	+165	+162	+156	+152	+151	+147	+143	+140
T 9	+172	+177	+176	+177	+175	+175	+171	+169	+165	+162	+155	+149	+147	+145	+141	+136
T 2	+174	+181	+178	+180	+176	+175	+171	+169	+165	+161	+148	+140	+136	+137	+132	+121
CT 200	-000	-000	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	+000	-000	-000	-000	+000	-000	-000	+000	+000	+000	-000	-000

310773

310773

310773

010873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	102 103	092 105	103 090	079 078	073 074	075 077	078 083	092 099	104 107	111 115	111 108	116 126
D 80	106 108	090 110	107 089	077 075	071 067	064 066	068 064	068 069	076 078	083 086	086 083	082 078
D 10	108 122	091 115	112 093	079 071	059 055	051 053	052 047	052 053	055 056	065 065	064 047	044 047
F 200	033 026	027 028	029 035	046 053	062 075	086 085	077 082	095 106	111 108	104 104	092 077	073 082
F160Z0	xxx											
F120Z0	xxx											
F 80	028 023	023 026	024 027	036 041	054 064	067 066	066 068	071 076	073 075	073 073	073 073	072 068
F 40Z0	xxx											
F 20Z0	xxx											
F 10	023 020	019 021	017 015	016 014	017 020	017 014	019 018	021 025	024 022	020 019	018 019	018 020
F 2	xxx											
T200	+183 +184	+187 +187	+187 +188	+187 +179	+183 +182	+182 +180	+178 +178	+178 +179	+180 +180	+181 +181	+186 +188	+182 +178
T160	+187 +188	+191 +191	+191 +191	+190 +182	+186 +185	+184 +182	+178 +176	+175 +174	+175 +175	+177 +179	+182 +187	+183 +178
T120	+190 +192	+195 +195	+195 +195	+194 +185	+190 +188	+186 +184	+175 +170	+167 +165	+165 +165	+169 +169	+176 +175	+170 +160
T 80	+195 +196	+196 +199	+199 +199	+197 +188	+192 +190	+187 +180	+174 +169	+164 +164	+160 +158	+157 +157	+160 +159	+160 +153
T 40	+199 +200	+203 +203	+202 +202	+200 +190	+191 +188	+185 +176	+170 +168	+162 +156	+156 +151	+149 +149	+148 +147	+145 +143
T 20	+201 +203	+205 +205	+204 +203	+199 +188	+188 +180	+176 +169	+165 +160	+155 +152	+150 +147	+146 +145	+143 +139	+138 +136
T 2	+207 +207	+210 +207	+204 +203	+195 +178	+177 +168	+160 +154	+151 +144	+144 +144	+142 +139	+138 +136	+135 +133	
CT200	-001 -001	-001 -001	-000 -000	-000 -000	-006 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-001 -000	-000 -000	-000 -000	-006 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

010d73

010873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
128 124	125 122	116 112	112 107	100 096	092 092	091 086	085 088	088 095	092 099	108 114	124 123
079 079	081 079	083 079	076 076	079 078	079 078	079 077	079 082	082 085	087 096	099 108	D 80
049 052	048 050	056 053	053 054	059 071	078 067	071 077	076 080	082 085	099 101	111 111	D 10
090 091	064 058	054 053	052 052	057 062	062 046	044 049	054 052	046 039	038 037	036 033	026 F200
xxx											
xxx	F160Z0										
U65 066	065 061	051 042	036 029	028 029	031 031	032 032	048 049	044 044	037 032	032 032	019 F 80
xxx	F 40Z0										
U18 019	019 017	016 021	019 022	023 024	026 026	027 028	037 037	035 033	029 025	027 024	020 012 F 2020
xxx	F 10										
*182 +181	+188 +199	+197 +196	+197 +200	+199 +199	+198 +188	+183 +183	+189 +197	+203 +203	+208 +216	+222 +222	+231 +234
+166 +163	+182 +185	+188 +192	+194 +192	+192 +178	+174 +174	+182 +192	+201 +201	+207 +212	+220 +220	+226 +231	+235 +238
+155 +151	+151 +155	+157 +159	+159 +166	+167 +157	+164 +164	+173 +185	+195 +205	+211 +216	+224 +224	+230 +235	+238 +238
+148 +144	+142 +141	+140 +140	+140 +142	+146 +152	+150 +150	+167 +167	+188 +188	+199 +209	+215 +220	+228 +234	+244 +242
+140 +136	+134 +132	+134 +134	+137 +142	+147 +154	+154 +162	+171 +171	+182 +192	+203 +213	+219 +224	+231 +234	+248 +250
+133 +131	+130 +128	+131 +131	+134 +134	+143 +149	+156 +156	+173 +173	+183 +183	+195 +206	+216 +221	+227 +234	+241 +245
+131 +128	+129 +127	+130 +136	+134 +150	+158 +167	+175 +175	+186 +186	+198 +208	+218 +218	+224 +230	+237 +243	+247 +250
+122 +121	+124 +124	+129 +137	+137 +144	+151 +160	+169 +169	+178 +189	+201 +211	+221 +227	+233 +239	+246 +248	+256 +250
*000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	CT200
+000 +000	+001 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	CT 20

C10d73

010873

020873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	101 099	092 078	108 131	147 098	054 064	137 118	103 094	093 095	104 105	094 111	129 139	153 165
D 80	092 083	078 076	101 132	146 178	045 058	123 115	118 106	074 076	076 089	073 073	352 224	191 173
D 10	081 071	070 068	101 103	017 038	024 066	121 130	162 108	017 058	027 042	343 270	235 175	104 038
F 200	024 026	024 022	044 050	031 013	025 048	104 100	081 081	081 082	070 062	060 060	046 050	048 025
F160Z0	xxx											
F120Z0	xxx											
F 80	019 018	019 021	034 035	024 005	016 035	076 072	055 044	044 042	027 009	016 015	021 021	
F 40Z0	xxx											
F 20Z0	xxx											
F 10	011 010	012 012	022 012	009 019	018 020	040 031	025 018	017 009	012 007	015 013	014 005	005 022
F 2	xxx											
T200	+234 +235	+236 +236	+238 +235	+235 +235	+238 +238	+213 +212	+217 +217	+219 +219	+220 +214	+220 +219	+204 +195	+188
T160	+238 +238	+240 +240	+241 +238	+238 +238	+242 +242	+240 +233	+209 +210	+212 +212	+226 +214	+226 +215	+219 +220	+200 +192
T120	+242 +242	+243 +245	+240 +235	+241 +244	+243 +243	+235 +207	+206 +206	+202 +202	+219 +219	+220 +219	+210 +199	+195 +194
T 80	+245 +245	+247 +247	+248 +243	+243 +242	+245 +243	+239 +207	+201 +197	+194 +194	+186 +186	+194 +194	+190 +188	+183 +183
T 40	+248 +248	+250 +250	+252 +252	+245 +242	+237 +237	+239 +239	+207 +199	+193 +193	+190 +189	+184 +184	+184 +184	+184 +184
T 20	+249 +249	+251 +251	+252 +252	+245 +242	+233 +233	+232 +228	+208 +199	+191 +191	+187 +187	+188 +188	+184 +184	+174 +174
T 2	+250 +250	+252 +252	+253 +254	+244 +229	+229 +226	+221 +219	+208 +198	+189 +185	+185 +174	+176 +175	+170 +166	+156 +154
+	+250 +250	+253 +251	+251 +240	+223 +223	+216 +213	+211 +211	+205 +195	+180 +172	+162 +158	+151 +151	+144 +139	+138 +140
CT20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-001 -001	-001 -001	-000 -000	-000 -000	-000 -000	-001 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

020873

020873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
189 269	279 302	335 360	347 001	009 006	021 023	016 030	354 260	234 264	267 262	267 275	xxx 258
057 034	360 019	038 068	035 036	037 017	061 008	005 004	349 254	223 264	264 272	261 263	xxx 245
075 014	003 020	033 122	317 011	026 006	011 012	xxx 073	250 205	227 260	272 257	257 254	xxx 243 D 10
020 023	037 028</										

020873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW												
D200	263	308	318	322	326	324	332	342	351	359	009	021	024	039	045	109	246	257	259	245	229	232	240	256	
D 80	227	294	315	322	319	317	318	320	324	331	339	339	335	356	355	342	300	283	265	232	223	230	239	239	
D 10	220	274	310	323	315	307	314	311	275	300	230	035	307	137	282	265	244	263	218	175	177	179	186	185	
F200	034	046	047	060	057	051	058	050	042	037	040	033	024	015	009	005	010	016	018	026	035	044	061	067	
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	029	036	045	058	055	045	046	055	048	045	039	033	032	021	016	011	017	014	016	017	030	048	066	060	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F200	+219	+222	+216	+218	+210	+208	+212	+213	+206	+207	+207	+202	+199	+199	+197	+196	+194	+196	+195	+196	+192	+188	+183	+181	
T160	+222	+225	+220	+218	+213	+210	+211	+211	+208	+208	+206	+203	+200	+200	+199	+197	+194	+194	+196	+196	+196	+192	+187	+178	+174
T 120	+224	+227	+224	+221	+217	+214	+211	+211	+208	+208	+207	+204	+200	+201	+200	+198	+193	+195	+194	+194	+199	+196	+187	+175	+168
T 60	+227	+229	+228	+225	+220	+216	+213	+209	+206	+207	+205	+200	+199	+201	+201	+199	+189	+190	+192	+195	+195	+187	+173	+165	
T 40	+228	+231	+232	+228	+222	+218	+214	+207	+201	+200	+193	+189	+190	+197	+197	+193	+177	+170	+185	+189	+179	+176	+165	+157	
T 20	+226	+233	+234	+229	+223	+218	+215	+206	+198	+195	+187	+184	+182	+182	+178	+166	+175	+163	+170	+169	+162	+151	+158	+156	+149
T 9	+225	+234	+234	+229	+222	+217	+213	+204	+197	+192	+181	+178	+175	+170	+170	+169	+162	+151	+158	+156	+155	+154	+154	+149	+146
T 2	+222	+235	+235	+226	+216	+213	+206	+196	+187	+170	+161	+153	+148	+143	+137	+138	+132	+137	+135	+131	+129	+130	+131	+130	+130
CT200	-000	-000	-001	+003	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CF 20	-000	-001	-000	+000	+000	+000	+000	+000	+000	+000	-000	+000	+001	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

030873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	030873												
266	272	269	266	242	246	239	233	234	231	221	222	226	216	219	218	216	215	217	215	219	215	D 200		
236	232	233	230	229	226	229	227	227	219	222	228	224	214	220	220	218	214	214	221	219	223	220	D 80	
188	197	207	211	218	223	227	234	229	230	222	229	231	229	214	222	222	216	218	225	221	228	226	D 10	
U89	066	059	050	045	047	056	065	067	057	064	067	074	064	076	078	067	069	070	076	064	061	061	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
064	065	066	060	040	051	058	064	064	056	061	065	071	074	078	066	064	061	071	059	056	058	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
U20	019	020	019	029	035	048	053	053	047	052	056	056	068	054	054	049	057	057	055	052	048	F 10		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
*174	+151	+176	+173	+172	+149	+138	+139	+133	+135	+133	+149	+157	+159	+162	+164	+159	+156	+163	+166	+167	+171	+175	T 200	
+168	+168	+168	+163	+150	+139	+140	+141	+141	+139	+142	+154	+161	+163	+166	+168	+163	+160	+160	+167	+170	+171	+175	T 160	
+165	+160	+157	+153	+143	+142	+143	+143	+145	+147	+158	+165	+167	+170	+171	+166	+163	+164	+171	+174	+175	+179	+183	T 120	
+163	+158	+152	+150	+144	+143	+144	+145	+145	+147	+152	+162	+165	+171	+174	+176	+168	+168	+175	+178	+179	+183	+187	T 80	
+154	+152	+148	+143	+143	+145	+145	+145	+146	+147	+148	+145	+155	+166	+173	+175	+179	+180	+182	+182	+184	+185	+194	T 40	
+146	+144	+142	+141	+141	+143	+147	+148	+150	+155	+158	+159	+169	+176	+178	+182	+183	+183	+184	+185	+185	+186	+193	T 20	
+143	+141	+141	+141	+143	+147	+148	+148	+151	+157	+160	+160	+171	+178	+180	+184	+185	+186	+176	+176	+178	+182	+183	T 9	
+131	+128	+129	+130	+139	+147	+149	+151	+153	+151	+150	+150	+174	+174	+183	+186	+189	+190	+178	+178	+187	+188	+197	T 2	
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	*	*	*	*	*	*	*	*	*	*	*	*	
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	-005	-010	-003	+000	-000	-000	-000	-000	-000	-000	-000	CT 200	
CT 20	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

030873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	030873										
D200	224	230	226	226	219	211	211	210	214	218	220	214	214	215	217	218	228	225	225	229	231	237	
D 80	230	233	229	232	222	209	207	199	201	219	223	218	217	216	215	217	221	223	228	226	229	228	227
D 10	233	237	233	235	225	229	209	198	194	217	225	218	217	214	218	222	226	231	228	230	228	226	
F200	066	073	071	058	063	066	067	070	080	091	099	098	102	106	108	106	103	107	098	099	101	096	088
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	064	066	055	054	057	056	051	051	058	066	073	070	076	079	075	079	078	084	079	079	080	074	071
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	053	051	055	045	046	038	031	028	037	048	042	039	042	040	046	047	043	049	048	045</			

040873

040873

050873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	265	261	279	309	297	277	265	222	225	232	233	226
D 80	231	228	261	310	309	297	289	211	212	217	224	219
D 10	196	208	211	306	310	299	244	189	196	203	214	216
F200	028	024	026	031	035	033	015	026	042	066	085	083
F160ZO	xxx											
F120ZO	xxx											
F 80	018	022	019	033	038	024	011	017	036	050	060	065
F 40ZO	xxx											
F 20ZO	xxx											
F 10	016	016	012	028	025	013	006	013	018	024	029	029
F 2	xxx											
T200	+163	+160	+160	+158	+156	+155	+153	+153	+154	+154	+152	+149
T160	+166	+164	+164	+161	+159	+158	+156	+156	+157	+157	+155	+156
T120	+170	+167	+167	+164	+162	+161	+160	+161	+160	+157	+155	+154
T 80	+172	+170	+169	+168	+165	+164	+163	+163	+162	+159	+156	+155
T 40	+173	+171	+170	+171	+168	+167	+166	+165	+164	+163	+159	+157
T 20	+174	+172	+171	+173	+169	+168	+167	+166	+163	+161	+157	+155
T 9	+174	+172	+172	+174	+169	+168	+167	+165	+162	+160	+156	+154
T 2	+174	+173	+172	+173	+167	+166	+165	+160	+157	+156	+149	+146
CT200	-000	-000	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000
CT 20	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

050873

050873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
199	201	204	204	205	214	217	218	218	214	214	215	
192	193	195	195	198	206	213	216	217	215	212	213	
188	192	195	200	208	215	219	220	218	214	213	217	
149	169	177	167	159	156	162	156	146	147	143	142	
xxx												
xxx												
097	115	123	120	119	121	130	126	125	117	122	111	
xxx												
xxx												
062	077	078	077	071	078	081	089	088	083	073	073	071
xxx												
+111	+118	+123	+126	+129	+131	+134	+128	+136	+136	+140	+141	+142
+112	+119	+124	+127	+131	+133	+136	+132	+133	+138	+140	+142	+143
+114	+121	+126	+129	+132	+130	+136	+130	+136	+140	+142	+144	+145
+115	+122	+128	+131	+134	+134	+138	+130	+133	+140	+142	+144	+145
+117	+124	+129	+131	+133	+136	+134	+136	+134	+140	+142	+144	+145
+119	+125	+131	+134	+137	+134	+133	+139	+133	+153	+155	+157	+158
+119	+126	+131	+134	+137	+136	+143	+140	+143	+147	+146	+150	+151
+120	+126	+131	+135	+138	+138	+140	+144	+143	+145	+147	+148	+149
*	*	*	*	*	*	*	*	*	*	*	*	*
-000	-000	-000	-000	-000	-001	-003	-004	-018	-001	-002	-002	-000
*000	+000	+000	+000	+000	-002	-012	-001	-038	+007	+002	-001	+000

050873

050873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
D200	214	211	215	215	212	207	202	194	194	195	195	195
D 80	215	214	218	217	216	205	195	184	184	183	180	177
D 10	219	220	222	220	218	204	185	173	176	174	172	173
F200	127	104	116	112	095	104	101	106	125	133	145	157
F160ZO	xxx	xxx										
F120ZO	xxx	xxx										
F 80	085	087	089	083	064	062	042	068	083	089	100	106
F 40ZO	xxx	xxx										
F 20ZO	xxx	xxx										
F 10	054	060	060	056	041	035	030	030	039	045	054	056
F 2	xxx	xxx										
T200	+154	+157	+157	+167	+161	+160	+175	+186	+187	+187	+186	+188
T160	+160	+163	+163	+167	+163	+162	+169	+187	+189	+189	+187	+188
T120	+159	+161	+161	+170	+165	+162	+163	+188	+191	+190	+187	+188
T 80	+161	+164	+164	+170	+173	+168	+169	+179	+189	+192	+189	+189
T 40	+164	+166	+166	+172	+176	+170	+167	+169	+189	+192	+190	+183
T 20	+165	+173	+175	+178	+171	+168	+171	+188	+191	+191	+190	+183
T 9	+166	+173	+176	+182	+180	+178	+181	+188	+190	+191	+189	+182
T 2	+167	+173	+175	+178	+180	+178	+180	+186	+188	+186	+179	+174
*	*	*	*	*	*	*	*	*	*	*	*	*
CT200	-000	-000	-001	-010	-004	-000	-002	+006	+000	-000	-000	-000
CT 20	+000	-005	-006	-001	+000	-004	-005	+000	+000	-000	-000	-000

060873

060873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
199	194	196	197	194	196	197	196	195	197	200	204	202
173	174	174	185	187	186	189	190	193	190	191	201	203
166	168	167	174	181	187	187	193	188	190	202	204	205
147	162	158	167	183	177	166	155	145	141	156	139	147
xxx	xxx											
xxx	xxx											
094	111	102	103	114	113	111	110	119	118	132	145	143
xxx	xxx											
xxx	xxx											
047	050	055	056	067	076	077	083	082	086	088	095	109
xxx	xxx											
+163	+164	+164	+165	+170	+173	+176	+181	+185	+191	+198	+206	+219
+161	+162	+162	+168	+172	+177	+183	+188	+195	+202	+210	+220	+224
+157	+158	+158	+161	+166	+172	+179	+186	+192	+199	+206	+214	+228
+156	+155	+156	+161	+166	+173	+181	+189	+195	+202	+214	+228	+234
+157	+155	+156	+161	+168	+174	+183	+192	+199	+206	+214	+228	+237
+157	+156	+157	+161	+168	+175	+184	+193	+201	+208	+216	+225	+241
+157	+155	+156	+161	+168	+175	+184	+193	+201	+209	+217	+226	+242
+154	+153	+154	+160	+167	+175	+184	+193	+202	+211	+219	+228	+238
-000	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000
*000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

CT200

CT 20

060873

060873

070873

CABA UW

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D 200	274	276	278	273	265	260	252	247	238	236	232	231	227	222	227	226	220	217	216	216	214	213	212	213	
D 80	274	275	277	273	264	258	249	242	235	233	225	227	223	220	222	222	220	217	217	216	214	215	213	210	208
D 10	277	277	278	276	267	261	254	246	238	235	225	229	226	222	225	225	223	219	217	213	214	212	210	206	
F 200	120	136	133	132	118	115	113	119	107	109	101	111	113	118	119	122	118	115	112	117	117	110	115	117	
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	097	120	118	116	095	089	090	098	083	084	079	086	087	092	091	091	088	087	083	086	086	084	085	086	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	054	079	085	078	065	057	063	071	056	057	058	062	061	060	059	061	057	053	048	053	050	051	048	047	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+160	+157	+155	+168	+168	+163	+148	+134	+132	+130	+122	+132	+134	+133	+134	+132	+134	+131	+130	+129	+125	+123			
T 160	+168	+163	+165	+171	+171	+171	+165	+153	+141	+134	+134	+133	+128	+135	+137	+136	+136	+135	+134	+133	+131	+128	+125		
T 120	+165	+163	+168	+175	+174	+174	+169	+156	+142	+136	+136	+135	+127	+139	+140	+139	+140	+139	+138	+136	+135	+134	+130	+127	
T 80	+168	+165	+165	+173	+178	+177	+177	+172	+159	+146	+138	+138	+137	+134	+142	+143	+141	+142	+142	+140	+139	+138	+137	+128	
T 40	+171	+164	+168	+181	+179	+179	+175	+163	+150	+140	+141	+140	+132	+140	+145	+144	+145	+144	+142	+141	+140	+139	+134	+129	
T 20	+172	+166	+168	+182	+180	+179	+176	+163	+151	+141	+142	+141	+140	+145	+146	+144	+145	+144	+143	+141	+140	+139	+134	+129	
T 2	+174	+167	+157	+180	+178	+176	+172	+160	+152	+142	+143	+142	+134	+133	+140	+142	+143	+142	+140	+139	+138	+137	+129		
CT 200	-016	-002	-011	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		
CT 20	+000	-004	-015	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000		

070873

070873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
214	214	216	214	211	212	211	212	206	206	207	207	202	198	209	221	213	243	234	231	230	243	250	D 200	
213	212	211	209	209	207	210	210	210	214	214	205	208	202	212	218	214	237	226	221	224	239	247	D 80	
209	209	208	204	208	211	209	213	213	214	218	219	211	205	218	223	216	241	228	225	229	242	251	D 10	
118	119	121	120	117	116	115	117	109	116	110	110	122	134	145	154	159	155	184	150	150	137	147	163	F 200
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
081	086	084	084	084	094	095	094	100	108	099	104	115	120	138	145	150	143	146	118	115	125	137	145	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
043	050	051	047	048	053	058	070	076	081	078	092	080	090	106	110	116	107	107	089	086	107	111	117	F 10
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
*121	*120	*120	*121	*119	*120	*122	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	F 2
*122	*122	*122	*122	*121	*122	*122	*124	*127	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	T 200
*124	*124	*123	*123	*123	*124	*124	*127	*131	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	*124	T 160
*126	*125	*125	*125	*125	*125	*125	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	T 120
*127	*127	*127	*126	*126	*126	*126	*126	*129	*134	*139	*147	*153	*157	*157	*157	*157	*157	*157	*157	*157	*157	*157	*157	T 80
*127	*127	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	T 40
*127	*127	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	T 20
*127	*127	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	*126	T ?
+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	+124	T ?
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20

070873

070873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
257	260	262	264	264	261	260	260	271	276	275	276	275	276	268	269	271	273	270	276	280	279	278	D 200	
237	240	243	250	250	247	250	258	264	272	276	277	276	279	270	267	272	275	277	278	284	284	278	D 80	
219	225	229	231	232	247	260	268	274	278	277	279	278	271	271	272	279	278	279	287	284	284	280	D 10	
097	106	106	101	098	095	089	090	085	089	082	084	083	083	080	082	080	081	080	072	070	070	070	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
064	070	074	074	065	063	070	084	088	085	081	083	075	079	076	084	078	075	077	076	068	065	065	065	F 80
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
034	041	041	032	031	033	043	058	068	066	066	067	064	070											

080873

080873

090873

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	273	270	271	274	277	271	277	278	271	261	255	247
D 80	278	270	279	278	244	278	264	285	277	263	245	235
D 10	283	274	280	280	285	281	295	277	256	223	190	171
F200	360	059	053	053	046	044	044	051	048	048	046	032
F160Z0	xxx											
F120Z0	xxx											
F 80	057	055	050	048	044	041	040	050	048	041	035	024
F 40Z0	xxx											
F 20Z0	xxx											
F 10	052	049	045	042	035	027	022	020	016	013	014	009
F 2	xxx											
T200	+152	+153	+153	+153	+152	+152	+151	+151	+150	+149	+148	+146
T160	+156	+157	+157	+157	+156	+155	+154	+153	+152	+151	+150	+149
T120	+160	+161	+161	+161	+160	+159	+158	+156	+155	+153	+152	+152
T 80	+165	+166	+165	+165	+164	+163	+162	+160	+159	+155	+154	+152
T 40	+169	+170	+169	+169	+168	+166	+164	+160	+157	+154	+152	+152
T 20	+172	+173	+172	+171	+170	+167	+164	+159	+154	+151	+146	+146
T 9	+174	+174	+173	+173	+171	+167	+163	+157	+148	+141	+138	+138
T 2	+179	+179	+175	+174	+171	+164	+157	+145	+130	+125	+114	+113
CT200	-001	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000
CT 20	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

090873

090873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
232	231	227	224	216	208	200	198	201	196	195	200
220	221	219	221	213	205	197	196	197	193	191	196
197	193	193	191	185	183	177	174	194	202	187	188
U75	071	070	067	077	079	074	070	071	064	056	057
xxx											
xxx											
U69	067	066	063	062	055	054	046	038	035	042	055
xxx											
xxx											
023	026	028	026	021	020	022	029	031	030	035	047
xxx											
*144	*145	*145	*145	*145	*145	*148	*148	*146	*143	*147	*150
*145	*147	*146	*146	*147	*147	*149	*148	*143	*146	*144	*151
*145	*146	*146	*146	*146	*146	*146	*146	*146	*150	*158	*160
*141	*139	*139	*140	*137	*132	*135	*137	*142	*147	*153	*159
*128	*129	*127	*127	*126	*128	*132	*139	*145	*150	*157	*163
*124	*123	*123	*124	*125	*128	*133	*141	*147	*153	*159	*166
*122	*121	*122	*123	*123	*125	*128	*134	*142	*148	*154	*161
*118	*118	*119	*120	*123	*129	*134	*144	*150	*157	*165	*173
*000	*000	*000	*000	*000	*000	*001	*001	*000	*000	*000	*000
*000	*000	*000	*000	*000	*000	*000	*000	*000	*000	*000	*000

090873

090873

100873

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	227	226	216	207	199	196	190	190	189	194	197	202
D 80	233	233	228	216	203	185	179	182	172	183	214	232
D 10	238	237	233	220	203	174	170	160	146	150	260	217
F200	069	053	044	043	049	044	048	057	058	076	066	060
F160Z0	xxx											
F120Z0	xxx											
F 80	067	049	043	038	041	031	035	047	048	057	030	028
F 40Z0	xxx											
F 20Z0	xxx											
F 10	057	041	037	028	025	017	014	014	010	011	013	008
F 2	xxx											
T200	*176	*177	*180	*183	*185	*186	*188	*189	*191	*188	*183	*182
T160	*180	*181	*184	*187	*184	*189	*192	*192	*194	*183	*180	*179
T120	*184	*185	*188	*191	*193	*192	*194	*195	*197	*184	*183	*182
T 80	*188	*189	*192	*195	*196	*195	*197	*197	*196	*196	*196	*195
T 40	*192	*193	*196	*198	*199	*198	*197	*195	*195	*190	*189	*188
T 20	*194	*195	*198	*200	*200	*198	*196	*192	*184	*179	*173	*172
T 9	*196	*197	*200	*201	*201	*200	*198	*198	*195	*190	*189	*188
T 2	*200	*199	*202	*202	*199	*195	*187	*178	*164	*163	*162	*161
CT200	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

100873

100873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
233	231	240	240	241	246	243	251	256	245	238	245	251
216	221	220	214	214	237	214	222	227	226	234	247	256
181	181	169	166	172	172	200	219	227	231	238	242	248
073	074	080	083	070	066	069	062	045	036	034	031	032
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
070	065	065	070	071	066	068	052	045	040	037	035	033
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
018	013	021	024	023	021	032	034	039	039	034	030	030
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
*181	*178	*179	*182	*171	*167	*167	*162	*165	*163	*168	*175	*181
*182	*180	*180	*182	*172	*164	*162	*156	*156	*161	*167	*172	*179
*183	*180	*176	*177	*170	*164	*161	*155	*157	*164	*170	*176	*183
*180	*174	*170	*168	*159	*157	*158	*156	*161	*168	*176	*180	*184
*146	*147	*147	*145	*138	*139	*135	*152	*158	*164	*172	*178	*184
*137	*136	*136	*133	*130	*136	*152	*160	*167	*175	*181	*187	*194
*133	*132	*132	*128	*135	*152	*161	*169	*177	*184	*189	*197	*202
*118	*110	*119	*116	*121	*134	*152	*163	*172	*181	*189	*194	*202
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
*001	*001	*030	*000	*000	*000	-000	-000	-000	-000	-000	-000	-000

CT200

CT 20

100873

100873

110873

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	259	263	253	336	340	344	002	012	025	040	048	055
D 80	255	255	257	322	331	330	342	004	016	035	045	049
D 10	256	246	271	357	331	329	338	350	004	021	038	039
F200	024	016	009	016	034	046	054	062	071	077	080	087
F160Z0	xxx											
F120Z0	xxx											
F 80	023	016	008	016	040	052	053	054	060	062	066	066
F 40Z0	xxx											
F 20Z0	xxx											
F 10	022	017	008	015	033	037	029	026	024	026	027	024
F 2	xxx											
T200	+218	+220	+218	+215	+209	+204	+203	+195	+194	+183	+184	+187
T160	+222	+224	+223	+218	+213	+207	+205	+198	+194	+184	+181	+186
T120	+226	+228	+226	+223	+216	+209	+206	+195	+186	+182	+181	+185
T 80	+230	+232	+231	+227	+220	+212	+208	+203	+196	+187	+182	+179
T 40	+234	+235	+234	+231	+223	+215	+209	+203	+196	+187	+182	+179
T 20	+236	+237	+236	+232	+225	+216	+209	+201	+195	+186	+180	+175
T 9	+233	+239	+237	+233	+226	+217	+209	+200	+194	+186	+180	+174
T 2	+241	+241	+239	+234	+225	+215	+204	+194	+191	+183	+177	+170
CT200	-001	-000	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000
CT 20	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000

110873

110873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
103	115	117	112	113	109	106	095	105	077	050	042
067	071	075	071	074	049	037	033	050	045	048	039
040	042	029	015	029	004	017	023	039	043	031	032
065	063	063	059	065	056	050	042	023	029	031	032
xxx											
xxx											
xxx											
xxx											
xxx											
xxx											
018	010	009	014	012	019	024	032	030	027	024	024
xxx											
+192	+182	+181	+176	+172	+171	+171	+183	+176	+181	+179	+184
+180	+177	+172	+171	+167	+160	+158	+157	+166	+162	+177	+179
+164	+163	+162	+161	+160	+154	+151	+147	+152	+161	+172	+183
+158	+156	+155	+153	+150	+145	+145	+145	+155	+155	+160	+168
+155	+153	+151	+150	+148	+143	+143	+143	+149	+149	+150	+155
+149	+147	+146	+142	+137	+137	+145	+145	+152	+161	+172	+181
+147	+145	+145	+142	+138	+135	+137	+137	+146	+163	+173	+184
+141	+136	+130	+126	+130	+135	+146	+166	+176	+188	+201	+210
+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
CT200	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000

110873

110873

120873

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	001	002	007	014	023	030	032	038	046	054	060	068
D 80	002	357	006	014	011	014	017	022	030	046	053	055
D 10	358	356	002	014	007	011	010	013	019	025	036	038
F200	038	051	055	061	067	069	073	079	084	092	102	107
F160Z0	xxx											
F120Z0	xxx											
F 80	039	033	057	059	063	066	068	071	071	077	075	070
F 40Z0	xxx											
F 20Z0	xxx											
F 10	031	044	040	037	030	028	028	027	024	024	028	031
F 2	xxx											
T200	+228	+222	+219	+218	+216	+211	+209	+206	+195	+195	+189	+183
T160	+232	+226	+221	+219	+217	+216	+211	+209	+207	+202	+196	+192
T120	+235	+229	+224	+217	+215	+211	+209	+208	+205	+198	+193	+189
T 80	+240	+233	+224	+224	+216	+211	+209	+207	+205	+199	+194	+189
T 40	+244	+237	+231	+227	+223	+217	+211	+206	+201	+197	+196	+191
T 20	+246	+239	+233	+229	+222	+217	+211	+204	+197	+190	+187	+182
T 9	+248	+241	+235	+230	+223	+218	+211	+204	+196	+188	+187	+180
T 2	+251	+243	+237	+231	+223	+217	+210	+202	+191	+181	+180	+175
CT200	-000	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

120873

120873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
085	088	089	087	086	085	075	067	068	067	059	062	060
067	067	066	065	063	062	062	057	050	050	049	056	060
050	049	045	047	052	050	055	050	037	037	042	052	050
115	110	114	107	102	099	094	081	087	064	055	051	049
xxx												
xxx												
067	072	068	071	062	055	049	050	050	046	046	047	050
xxx												
xxx												
025	027	024	030	029	031	032	039	039	034	038	035	037
xxx												
+159	+163	+156	+160	+164	+165	+145	+146	+152	+156	+163	+171	+179
+139	+136	+139	+141	+140	+138	+137	+143	+150	+157	+166	+175	+183
+136	+135	+133	+134	+132	+134	+138	+146	+153	+161	+170	+179	+187
+136	+135	+132	+131	+131	+132	+136	+142	+150	+156	+165	+174	+184
+135	+133	+130	+129	+131	+139	+146	+154	+160	+169	+178	+199	+203
+133	+131	+129	+128	+128	+131	+135	+142	+157	+164	+172	+181	+192
+132	+130	+128	+127	+131	+136	+143	+150	+158	+165	+175	+184	+194
+129	+126	+124	+129	+136	+144	+151	+161	+169	+180	+189	+198	+207
-001	-000	-000	-000	-000	-000	-001	-001	-001	-001	-001	-000	-000
+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT200	-001	-001	-001	-000	-000	-001	-001	-001	-001			

120873

120873

130873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	066	064	066	064	062	065	064	063	064	065	067	070
D 80	066	063	066	059	057	063	061	060	057	054	057	057
D 10	053	052	055	050	045	046	051	036	029	030	035	039
F 200	062	061	061	065	067	075	084	090	103	111	120	125
F 160Z0	XXX	XXX	XXX	XXX	XXX	X-X	XXX	XXX	XXX	XXX	XXX	XXX
F 120Z0	XXX											
F 80	058	059	057	061	055	058	073	065	065	081	086	087
F 40Z0	XXX											
F 20Z0	XXX											
F 10	039	041	036	039	032	026	030	023	024	030	027	030
F 2	XXX											
T 200	+223	+223	+223	+221	+218	+217	+214	+211	+207	+204	+199	+190
T 160	+226	+227	+226	+224	+221	+210	+217	+214	+209	+205	+199	+189
T 120	+231	+231	+230	+228	+225	+223	+216	+211	+206	+204	+199	+189
T 80	+235	+234	+234	+232	+228	+226	+223	+217	+210	+205	+197	+188
T 40	+239	+239	+238	+235	+231	+227	+222	+213	+203	+194	+189	+182
T 20	+241	+241	+240	+237	+232	+227	+221	+208	+193	+181	+178	+174
T 9	+243	+242	+241	+238	+233	+227	+220	+207	+191	+179	+175	+172
T 2	+246	+244	+242	+238	+231	+224	+215	+198	+181	+171	+163	+163
CT 200	-000	-000	-000	-000	-001	-001	-000	-000	-000	-000	-001	-001
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

130873

130873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
101	099	100	103	103	104	104	100	094	083	077	076	
074	075	076	076	075	075	075	075	076	079	083	090	
054	055	056	057	057	069	072	074	071	077	080	075	
144	139	138	128	116	111	108	096	094	090	062	055	
XXX												
XXX												
080	075	078	073	077	066	059	055	059	041	046	049	
XXX												
XXX												
031	029	032	028	031	029	031	033	042	041	035	031	034
XXX												
+177	+164	+167	+178	+185	+185	+175	+186	+179	+169	+177	+188	
+150	+145	+146	+147	+151	+149	+143	+149	+155	+162	+169	+180	
+139	+136	+136	+136	+139	+138	+140	+146	+153	+162	+172	+183	
+134	+132	+132	+132	+131	+132	+135	+141	+148	+156	+165	+176	
+131	+129	+128	+127	+128	+133	+143	+152	+160	+169	+179	+190	
+129	+127	+125	+125	+128	+134	+134	+145	+154	+163	+171	+182	
+128	+126	+124	+124	+128	+134	+145	+154	+163	+173	+184	+196	
+124	+122	+121	+121	+121	+126	+134	+146	+157	+166	+176	+187	
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	

130873

130873

140873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
0200	097	097	095	092	077	073	072	074	075	076	092	097
D 80	097	095	093	085	075	070	067	067	068	069	076	077
D 10	104	099	098	083	069	053	051	053	052	046	051	050
F 200	059	058	061	060	067	082	109	103	113	118	124	127
F 160Z0	XXX											
F 120Z0	XXX											
F 80	053	047	048	044	044	053	070	076	083	086	085	087
F 40Z0	XXX											
F 20Z0	XXX											
F 10	038	034	029	024	021	023	024	024	023	018	022	026
F 2	XXX											
T 200	+244	+245	+244	+244	+243	+240	+238	+236	+235	+233	+231	+227
T 160	+248	+249	+248	+247	+246	+243	+241	+239	+237	+234	+230	+226
T 120	+252	+253	+252	+251	+249	+246	+244	+239	+236	+234	+227	+221
T 80	+256	+257	+255	+254	+252	+248	+245	+241	+237	+230	+224	+215
T 40	+260	+262	+260	+259	+257	+255	+248	+242	+237	+230	+223	+219
T 20	+262	+262	+260	+257	+255	+246	+237	+228	+219	+212	+205	+197
T 9	+264	+263	+261	+258	+254	+245	+232	+224	+214	+207	+197	+189
T 2	+264	+263	+259	+255	+251	+231	+238	+221	+212	+201	+195	+181
CT 200	-001	-000	-001	-000	-001	-000	-000	-000	-001	-001	-000	-000
CT 20	-000	-000	-000	-001	-001	-000	-001	-001	-001	-000	-000	-000

140873

140873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
132	130	122	117	115	111	108	109	107	107	106	105	102
098	094	095	095	095	094	096	096	096	097	097	098	094
077	078	083	085	086	087	096	100	097	092	100	101	093
123	123	121	115	109	109	113	106	103	080	065	061	055
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
095	097	102	101	092	085	078	062	058	057	056	053	056
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
031	031	030	033	032	037	038	037	038	042	042	056	054
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
+211	+207	+204	+202	+201	+201	+202	+200	+191	+194	+198	+202	+208
+209	+206	+205	+204	+204	+204	+203	+198	+193	+187	+190	+197	+202
+205	+201	+204	+205	+203	+195	+182	+174	+180	+183	+190	+197	+206
+186	+180	+178	+175	+172	+169	+172	+179	+186	+194	+203	+210	+216
+164	+161	+160	+160	+164	+167	+173	+182	+190	+197	+208	+214	+228
+159	+157	+155	+156	+157	+162	+167	+174	+184	+192	+200	+210	+217
+157	+155	+153	+154	+156	+162	+167	+175	+185	+194	+203	+213	+224
+151	+150	+152	+159	+166	+175	+185	+195	+204	+215	+222	+227	+231
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

CT 200  
CT 20

142873

150873

150873

160873

160873													
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15		
138 135	139 139	141 142	141 142	144 145	136 129	131 128	127 119	122 127	132 131	128 126	xxx xxx		
116 113	115 117	117 116	113 117	120 118	116 120	122 126	120 114	114 125	131 126	119 119	xxx xxx		D200
093 097	106 108	104 102	105 111	117 118	116 123	125 132	122 113	114 130	137 127	133 123	xxx xxx		D 80
084 089	097 098	097 105	107 109	099 092	072 059	046 039	045 048	051 059	068 070	063 066	xxx xxx		D 10
xxx xxx			F200										
xxx xxx			F160Z0										
093 092	094 091	090 085	080 076	067 060	051 047	044 034	042 043	049 054	062 067	059 057	xxx xxx		F120Z0
xxx xxx			F 80										
037 031	030 032	033 035	036 035	041 041	039 041	036 035	034 034	036 044	052 050	044 045	xxx xxx		F 40Z0
xxx xxx			F 20Z0										
+238 +234	+225 +221	+217 +218	+217 +211	+220 +217	+199 +200	+208 +208	+217 +224	+232 +240	+248 +256	+260 +263	+265 xxx		F 2
+233 +222	+214 +209	+206 +207	+211 +207	+207 +195	+195 +202	+211 +221	+228 +236	+244 +252	+252 +260	+264 +267	+269 xxx		T200
+207 +204	+202 +201	+199 +191	+190 +194	+190 +192	+197 +206	+215 +224	+232 +240	+248 +256	+256 +264	+268 +271	+274 xxx		T160
+194 +191	+190 +186	+186 +184	+177 +177	+172 +178	+186 +194	+201 +210	+219 +229	+236 +244	+252 +260	+271 +275	+277 xxx		T120
+172 +170	+169 +167	+165 +165	+167 +174	+188 +198	+205 +214	+223 +233	+240 +248	+257 +264	+264 +272	+276 +279	+281 xxx		T 80
+164 +165	+164 +162	+161 +163	+163 +168	+175 +189	+200 +208	+217 +226	+236 +243	+251 +260	+267 +275	+279 +282	+284 xxx		T 40
+163 +163	+161 +159	+159 +159	+162 +168	+176 +190	+201 +209	+219 +228	+238 +245	+254 +263	+270 +277	+281 +284	+286 xxx		T 20
+157 +157	+157 +155	+154 +156	+160 +168	+177 +192	+203 +212	+222 +232	+243 +250	+258 +267	+274 +280	+284 +287	+288 xxx		T 9
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-001 -001	-001 -001	-001 -001	-000 -000	-000 -000	-000 -000	xxx xxx		T 2
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	xxx xxx		CT200
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	xxx xxx		CT 20

160873

160873

170873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	119	107	114	110	112	121	133	151	141	136	146	155
D 80	113	099	100	101	099	100	111	130	143	141	127	124
D 10	116	094	092	088	084	091	106	149	135	109	104	095
F200	041	048	047	053	059	065	082	077	056	061	060	074
F160Z0	xxx											
F120Z0	xxx											
F 80	035	038	042	048	057	066	050	050	046	041	042	044
F 40Z0	xxx											
F 20Z0	xxx											
F 10	126	023	018	015	016	021	020	020	017	024	020	017
F 2	xxx											
T200	+271	+271	+272	+273	+274	+272	+273	+271	+271	+266	+262	+260
T160	+275	+275	+275	+276	+277	+275	+276	+274	+273	+268	+263	+260
T120	+279	+279	+278	+279	+277	+278	+276	+276	+271	+264	+258	+254
T 80	+283	+282	+281	+281	+276	+277	+269	+276	+273	+265	+258	+249
T 40	+286	+285	+283	+281	+279	+273	+270	+263	+272	+276	+260	+251
T 20	+287	+286	+283	+280	+276	+270	+244	+256	+262	+263	+240	+239
T 9	+289	+287	+284	+284	+275	+268	+261	+249	+292	+255	+247	+235
T 2	+288	+285	+281	+274	+266	+260	+250	+231	+230	+229	+223	+207
CT200	-001	-001	-001	-001	-001	-001	-000	-000	-000	+000	+000	+000
CT 20	-001	-001	-001	-001	-002	-002	-001	-000	-001	-000	-000	-000

170873

170873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
263	269	274	275	274	282	284	280	262	239	227	228
247	247	259	266	256	264	264	276	261	251	220	204
145	145	147	127	171	170	143	171	156	165	169	177
052	048	049	045	041	042	035	028	020	024	038	048
xxx											
xxx											
057	054	049	042	044	043	035	039	030	023	015	019
xxx											
xxx											
010	013	005	010	014	009	006	009	012	012	014	014
xxx											
*226	+256	+255	+255	+249	+241	+238	+241	+236	+237	+235	+237
+226	+256	+255	+256	+248	+240	+237	+237	+238	+236	+237	+238
+256	+254	+252	+243	+235	+225	+228	+236	+232	+232	+236	+246
+244	+246	+246	+246	+232	+219	+213	+219	+224	+218	+215	+219
+201	+200	+200	+199	+194	+195	+194	+199	+200	+205	+210	+220
+181	+178	+175	+174	+172	+172	+177	+187	+193	+206	+211	+221
+171	+169	+162	+164	+165	+165	+172	+187	+193	+207	+212	+223
+142	+142	+136	+140	+141	+147	+108	+188	+194	+208	+214	+225
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+001	+000	+000	+000	+000	+000	+000	+000
CT200	-001	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000

170873

170873

180873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	285	282	278	290	306	311	303	297	313	337	358	002
D 80	276	278	278	284	283	308	314	319	325	317	325	313
D 10	276	279	285	288	282	309	311	320	330	320	309	314
F200	035	037	045	046	035	041	039	034	034	042	043	034
F160Z0	xxx											
F120Z0	xxx											
F 80	037	036	042	040	034	037	041	034	038	041	025	039
F 40Z0	xxx											
F 20Z0	xxx											
F 10	031	033	029	021	017	019	023	025	023	015	020	018
F 2	xxx											
T200	+232	+230	+228	+224	+219	+217	+218	+216	+208	+205	+210	+203
T160	+235	+232	+229	+225	+222	+219	+219	+214	+206	+204	+209	+200
T120	+238	+235	+230	+227	+224	+220	+213	+206	+203	+203	+207	+197
T 80	+242	+242	+239	+233	+226	+223	+219	+213	+206	+208	+200	+196
T 40	+246	+242	+245	+235	+231	+227	+224	+219	+213	+207	+202	+198
T 20	+248	+244	+237	+233	+228	+225	+219	+211	+205	+199	+194	+192
T 9	+248	+245	+237	+233	+228	+224	+219	+210	+203	+197	+192	+190
T 2	+249	+245	+235	+232	+224	+218	+213	+203	+197	+189	+185	+182
CT200	-000	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000

180873

180873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
026	026	034	046	039	036	041	039	037	037	048	050
008	011	020	047	034	019	026	023	030	035	042	049
359	360	008	031	353	357	009	012	022	030	036	041
067	07	071	068	056	058	051	053	051	050	047	038
xxx											
xxx											
060	064	052	055	040	038	034	043	042	048	045	038
xxx											
xxx											
031	034	023	019	021	019	021	027	030	035	032	027
xxx											
+166	+164	+163	+162	+161	+160	+159	+158	+157	+158	+159	+158
+168	+167	+165	+165	+163	+162	+161	+161	+161	+163	+163	+163
+170	+169	+168	+168	+165	+164	+165	+165	+167	+170	+174	+174
+170	+171	+170	+169	+168	+167	+167	+168	+169	+170	+174	+174
+171	+170	+170	+169	+168	+167	+167	+168	+169	+170	+174	+174
+171	+170	+169	+168	+168	+167	+167	+168	+169	+170	+174	+174
+171	+170	+169	+168	+168	+167	+167	+168	+169	+170	+174	+174
+171	+170	+169	+168	+168	+167	+167	+168	+169	+170	+174	+174
+169	+168	+167	+167	+167	+167	+167	+168	+169	+170	+174	+174
+169	+168	+167	+167	+167	+167	+167	+168	+169	+170		

180873

180873

190873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	
D 200	024 033	037 044	043 047	053 053	053 056	067 069	070 074	077 085	091 098	102 100	091 089	083 080	
D 80	014 021	021 022	020 028	035 030	033 035	036 041	040 057	063 066	063 062	062 057	050 046	036 033	
D 10	009 015	014 013	010 016	025 017	022 020	018 017	018 032	046 054	051 030	034 023	015 015	020 012	
F 200	055 053	047 048	053 057	055 053	057 061	066 070	065 066	065 067	061 056	056 051	053 048	042 041	
F 160ZO	xxx xxx	xxx xxx	x*x xxx	xxx xxx									
F 120ZO	xxx xxx												
F 80	055 049	046 047	051 056	053 050	059 056	057 055	054 058	051 049	047 048	047 045	045 047	049 053	
F 40ZO	xxx xxx												
F 20ZO	xxx xxx												
F 10	040 037	033 030	028 025	023 021	025 022	024 022	019 020	013 015	014 016	018 017	019 021	021 024	
F 2	xxx xxx												
T 200	*183 +184	+185 +187	+188 +186	+185 +183	+180 +182	+188 +189	+189 +189	+190 +191	+191 +191	+190 +182	+182 +176	+175	
T 160	+186 +188	+188 +189	+190 +189	+186 +184	+184 +181	+181 +185	+187 +189	+190 +189	+189 +189	+186 +186	+186 +174	+173 +169	
T 120	+190 +192	+192 +191	+193 +191	+188 +185	+182 +182	+184 +187	+189 +189	+187 +187	+184 +184	+180 +178	+178 +173	+172 +168	
T 80	+194 +196	+195 +194	+192 +191	+189 +186	+183 +184	+184 +184	+188 +188	+189 +189	+187 +187	+184 +184	+186 +178	+177 +166	
T 40	+198 +200	+199 +197	+194 +192	+190 +186	+182 +181	+181 +180	+179 +180	+180 +182	+184 +184	+181 +178	+177 +177	+174 +171	+166 +164
T 20	+201 +203	+201 +199	+196 +193	+190 +186	+166 +162	+181 +179	+179 +178	+180 +180	+181 +181	+178 +178	+172 +171	+168 +165	+163 +162
T 4	+203 +204	+203 +200	+197 +194	+191 +186	+182 +181	+179 +177	+178 +178	+179 +179	+180 +180	+177 +177	+172 +171	+168 +165	+163 +161
T 2	+206 +207	+205 +201	+198 +194	+190 +186	+181 +180	+178 +178	+178 +176	+175 +175	+169 +169	+167 +167	+167 +165	+163 +161	
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	

190873

190873

14-15

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
086 087	074 047	032 034	050 048	056 061	063 071	063 071	054 051	052 052	073 010	071 122	179 214	265 D 200
035 052	051 047	061 059	041 065	070 061	062 071	055 066	058 052	060 056	020 026	067 132	185 201	236 D 80
021 029	018 017	032 038	021 044	046 054	052 069	054 056	052 041	054 095	178 042	140 140	188 202	257 D 10
043 041	044 078	030 038	040 052	054 060	063 049	045 025	020 024	021 015	002 014	019 012	015 021	F 200
xxx xxx												
xxx xxx	F 160ZO											
055 021	047 042	051 053	013 024	025 033	028 017	014 022	018 021	018 013	009 014	019 014	017 020	F 80
xxx xxx	F 40ZO											
xxx xxx	F 20ZO											
024 019	019 019	016 022	015 012	012 018	021 012	012 017	015 018	015 014	009 010	010 010	020 015	020 F 10
xxx xxx	F 2											
+177 +175	+172 +172	+175 +186	+184 +185	+183 +180	+181 +177	+172 +175	+178 +182	+182 +187	+192 +195	+195 +197	+198 +197	+198 +200 T 200
+168 +170	+172 +173	+185 +188	+182 +184	+184 +179	+179 +175	+173 +173	+174 +178	+182 +186	+191 +196	+196 +199	+202 +202	+202 +204 T 160
+164 +168	+167 +176	+166 +189	+168 +166	+167 +165	+169 +169	+173 +173	+178 +182	+185 +185	+189 +195	+200 +200	+203 +205	+205 +207 T 120
+161 +162	+160 +160	+169 +180	+156 +156	+159 +159	+163 +163	+166 +166	+171 +176	+181 +186	+189 +193	+199 +204	+207 +210	+210 +219 T 80
+159 +158	+154 +154	+153 +157	+157 +161	+163 +163	+169 +169	+175 +175	+180 +185	+189 +189	+193 +193	+199 +204	+207 +211	+210 +219 +212 T 40
+158 +154	+152 +152	+157 +157	+159 +163	+165 +165	+171 +171	+177 +177	+182 +182	+187 +191	+195 +195	+199 +205	+210 +213	+213 +213 +215 T 20
+158 +154	+152 +152	+154 +154	+157 +160	+163 +163	+166 +166	+172 +178	+178 +184	+188 +188	+193 +193	+197 +201	+206 +212	+214 +214 +216 +215 T 9
+156 +152	+152 +152	+154 +154	+157 +162	+164 +164	+167 +173	+180 +185	+185 +190	+195 +195	+198 +205	+205 +209	+214 +216	+221 +220 +218 +218 T 2
-000 -000	-000 -000	-000 -000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	CT 200
-000 -000	-000 -000	-000 -000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	CT 20

190873

190873

200873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	279 305	355 008	354 003	019 009	026 000	xxx 352	220 282	296 286	280 284	286 283	283 283	282 289
D 80	271 300	351 003	353 002	015 018	020 022	033 030	304 255	288 303	288 290	299 280	279 280	240 283
D 10	272 291	340 002	351 002	006 004	004 004	352 255	264 323	287 263	273 263	275 273	274 250	271 272
F 200	016 015	025 024	019 017	022 022	016 003	xxx 005	012 023	032 035	034 035	035 054	059 049	056 057
F 160ZO	xxx xxx											
F 120ZO	xxx xxx											
F 80	015 014	026 026	021 022	032 034	027 028	017 021	014 022	018 020	022 022	029 023	043 061	053 062
F 40ZO	xxx xxx											
F 20ZO	xxx xxx											
F 10	014 014	012 019	019 011	011 021	007 008	013 024	012 009	011 009	011 013	026 028	019 019	028 029
F 2	xxx xxx											
T 200	+201 +202	+201 +199	+199 +198	+198 +197	+197 +196	+191 +186	+185 +185	+182 +182	+187 +176	+172 +177	+178 +175	+173 +174
T 160	+205 +206	+205 +205	+203 +203	+202 +201	+201 +201	+198 +199	+191 +191	+186 +187	+189 +187	+180 +180	+177 +177	+178 +175
T 120	+208 +210	+209 +207	+207 +205	+204 +201	+201 +201	+189 +189	+192 +192	+185 +185	+180 +185	+179 +179	+174 +174	+175 +172
T 80	+212 +212	+213 +211	+210 +209	+206 +200	+195 +198	+198 +198	+191 +193	+185 +185	+184 +184	+181 +181	+179 +178	+178 +177
T 40	+216 +216	+217 +217	+214 +214	+213 +212	+212 +206	+194 +194	+187 +187	+192 +192	+182 +182	+181 +181	+177 +177	+174 +171
T 20	+218 +218	+219 +219	+214 +214	+213 +213	+206 +206	+196 +196	+188 +188	+184 +184	+188 +188	+185 +185	+176 +176	+168 +168
T 4	+210 +210	+220 +217	+214 +214	+213 +213	+204 +204	+194 +194	+185 +185	+183 +183	+179 +179	+181 +181	+177 +171	+166 +166
T 2	+221 +222	+221 +217	+212 +212	+212 +202	+186 +175	+168 +169	+167 +166	+166 +166	+162 +162	+155 +155	+153 +153	+157 +157
CF 200	-000 -001	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CF 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

200873

200873

14-15

03-04	04-05	05-06	06-07	07-08	08-09	0

200377

30087

三六〇四

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D200	358	014	017	013	013	020	023	034	038	030	047	059	059	053	053	057	062	063	065	060	061	057	058	050
D 80	007	013	015	014	012	014	012	022	025	022	043	052	055	046	042	041	047	054	056	059	063	056	053	046
D 10	003	013	010	009	011	010	009	016	013	011	039	031	035	017	023	024	033	041	042	050	054	047	042	035
F200	038	039	037	031	032	041	055	060	058	068	059	055	051	058	063	068	069	073	073	076	079	073	083	
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	039	042	041	033	033	046	050	055	062	066	054	049	044	046	056	051	059	052	054	055	058	062	061	068
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	032	029	031	023	021	027	027	026	024	024	016	016	011	018	022	025	030	027	030	029	028	034	034	038
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T200	+189	+185	+184	+184	+182	+178	+174	+172	+171	+167	+168	+170	+166	+164	+159	+155	+152	+148	+146	+140	+141	+135	+137	+135
T160	+193	+189	+188	+186	+185	+181	+176	+175	+173	+170	+170	+172	+168	+166	+162	+157	+154	+150	+148	+144	+146	+146	+140	+138
T120	+197	+193	+192	+191	+189	+185	+180	+178	+175	+173	+173	+174	+171	+170	+165	+159	+156	+153	+151	+145	+146	+146	+144	+141
T 80	+201	+197	+196	+195	+193	+188	+183	+180	+177	+175	+175	+175	+174	+172	+167	+162	+157	+157	+154	+151	+149	+149	+147	+145
T 40	+205	+201	+200	+199	+196	+192	+186	+182	+177	+172	+171	+173	+170	+171	+167	+163	+160	+160	+157	+155	+153	+144	+144	+148
T 20	+207	+203	+202	+200	+198	+193	+188	+182	+175	+170	+170	+170	+168	+167	+166	+164	+161	+159	+157	+163	+157	+151	+149	
T 9	+208	+205	+204	+201	+199	+194	+189	+183	+174	+170	+169	+159	+168	+166	+166	+165	+162	+162	+159	+157	+153	+146	+141	+147
T 2	+209	+207	+206	+203	+200	+195	+189	+181	+172	+168	+168	+167	+164	+164	+165	+165	+162	+161	+159	+157	+162	+156	+151	+149
CT200	-000	+004	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 20	+000	-000	+000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+005	+000	+000

210575

210871

23

GMT	1-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	016	017	018	020	024	028	030	033	038	042	044	047
D 80	013	013	014	018	021	024	028	030	036	041	044	048
D 10	010	011	012	013	016	019	021	024	028	032	035	038
F 200	092	089	099	104	107	109	110	117	124	124	116	113
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	089	085	095	094	094	091	087	080	093	094	080	080
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 10	061	056	060	062	058	053	041	038	037	037	038	030
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
T200	+157	+156	+155	+153	+150	+147	+144	+140	+136	+132	+129	+124
T160	+162	+160	+159	+156	+154	+151	+147	+143	+138	+134	+131	+126
T120	+165	+164	+163	+160	+157	+154	+150	+146	+141	+136	+132	+127
T 80	+170	+169	+167	+164	+161	+157	+152	+147	+142	+137	+132	+127
T 40	+175	+174	+172	+168	+164	+159	+153	+145	+138	+133	+129	+125
T 20	+178	+177	+174	+170	+166	+160	+152	+143	+135	+130	+126	+119
T 9	+180	+179	+176	+172	+167	+160	+151	+142	+133	+128	+125	+119
T 2	+184	+183	+178	+173	+167	+160	+149	+138	+128	+123	+120	+112
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	-000	+000	+000	+000	-000	-000	-000	-000	-000	+007	+000

220873

220873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D200	071 074	068 065	062 055	057 053	061 066	061 070	064 061	064 071	078 091	091 092	091 088	093 089
D 80	072 071	065 064	057 048	034 041	046 049	054 061	053 051	053 051	059 066	067 069	074 066	070 076
D 10	070 066	056 053	044 033	012 016	019 024	036 045	036 032	036 039	039 053	050 052	054 048	052 054
F200	044 049	050 051	057 068	071 075	084 082	094 122	110 101	100 103	111 099	100 100	101 111	117 119
F16020	xxx											
F12020	xxx											
F 80	044 045	048 049	049 054	042 057	060 070	076 073	071 071	068 068	072 080	079 083	080 079	078 080
F 4020	xxx											
F 2020	xxx											
F 10	035 034	031 031	023 020	024 029	022 020	024 026	027 027	028 025	026 028	026 030	033 031	029 030
F 2	xxx											
T200	+170 +171	+172 +172	+171 +167	+163 +159	+160 +158	+149 +145	+136 +127	+124 +123	+129 +143	+141 +141	+139 +138	+144 +144
T160	+174 +175	+176 +176	+174 +167	+165 +161	+161 +161	+149 +145	+137 +129	+125 +125	+122 +121	+129 +124	+127 +135	+120 +128
T120	+179 +179	+180 +180	+177 +173	+165 +162	+162 +159	+150 +145	+138 +131	+127 +127	+124 +120	+119 +114	+113 +113	+106 +107
T 80	+182 +183	+184 +183	+180 +174	+174 +164	+160 +158	+158 +151	+145 +139	+133 +129	+125 +121	+121 +117	+113 +109	+108 +103
T 40	+187 +188	+188 +187	+181 +174	+161 +152	+148 +149	+147 +141	+137 +132	+127 +122	+118 +114	+109 +106	+104 +100	+098 +095
T 20	+189 +190	+190 +188	+180 +174	+160 +147	+140 +137	+137 +135	+134 +129	+124 +118	+111 +109	+105 +102	+102 +098	+095 +092
T 9	+191 +192	+192 +188	+181 +174	+160 +146	+138 +134	+132 +133	+133 +128	+122 +116	+109 +107	+103 +101	+102 +097	+094 +092
T 2	+193 +194	+192 +186	+178 +171	+157 +142	+131 +124	+121 +126	+128 +124	+117 +109	+101 +099	+097 +095	+097 +092	+090 +087
CT200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

230873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	230873
088 092	096 097	102 100	093 100	105 095	082 077	085 081	087 090	089 099	103 106	106 106	097 097	xxx xxx
077 073	073 074	076 076	074 076	080 079	074 075	075 077	082 088	084 102	098 101	111 111	099 099	xxx xxx
055 051	056 058	064 059	058 074	077 070	075 065	075 078	091 090	108 106	106 104	111 111	096 096	xxx xxx
123 126	120 107	108 093	073 053	049 044	035 039	047 059	055 043	044 042	032 029	xxx xxx	xxx xxx	F200
xxx	xxx											
xxx	F16020											
083 083	083 080	075 066	060 054	051 043	042 035	039 044	050 049	041 038	031 028	xxx xxx	xxx xxx	F 80
xxx	F 4020											
031 030	029 029	028 031	035 035	033 033	033 028	034 036	037 034	034 034	028 022	xxx xxx	xxx xxx	F 2020
xxx	F 10											
+140 +135	+125 +125	+127 +122	+102 +106	+128 +115	+122 +130	+139 +150	+160 +170	+178 +183	+188 +192	+196 +199	xxx xxx	xxx
+139 +124	+114 +112	+109 +104	+098 +100	+100 +109	+113 +124	+134 +143	+154 +154	+164 +175	+182 +188	+192 +196	+200 +203	xxx xxx
+113 +109	+101 +101	+102 +100	+098 +101	+101 +109	+116 +127	+137 +147	+158 +168	+179 +186	+192 +196	+200 +205	+207 +207	xxx xxx
+103 +102	+097 +098	+098 +098	+099 +104	+111 +120	+131 +141	+151 +162	+172 +183	+190 +196	+200 +204	+209 +212	xxx xxx	T 80
+094 +095	+093 +094	+097 +098	+100 +108	+110 +115	+124 +135	+145 +156	+166 +176	+188 +195	+201 +204	+209 +213	+213 +216	xxx xxx
+090 +095	+089 +092	+096 +099	+102 +110	+118 +126	+138 +148	+159 +169	+179 +191	+198 +204	+208 +212	+216 +219	xxx xxx	T 40
+089 +089	+087 +090	+096 +099	+103 +111	+119 +129	+140 +150	+162 +172	+183 +195	+202 +207	+211 +217	+220 +222	xxx xxx	T 20
+085 +084	+082 +085	+092 +098	+103 +112	+121 +122	+143 +154	+166 +176	+187 +198	+207 +213	+215 +225	+227 +227	xxx xxx	T 9
-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	CT200
+000 +000	+000 +000	+001 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	CT 20

230873

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D200	068 069	077 027	043 048	049 052	060 075	073 074	079 083	088 089	093 100	100 103	105 105	085 083
D 80	073 071	082 004	013 031	042 046	046 048	053 056	053 053	061 070	066 064	059 054	054 055	056 066
D 10	074 066	087 358	358 357	002 015	020 020	026 030	031 035	045 039	028 022	016 021	023 027	032 019
F200	027 024	017 036	060 072	079 084	085 087	088 100	102 101	101 092	084 077	068 062	064 062	057 047
F16020	xxx											
F12020	xxx											
F 80	023 020	015 054	059 051	052 064	068 071	073 072	075 079	080 073	062 060	062 067	067 065	063 062
F 4020	xxx											
F 2020	xxx											
F 10	019 015	013 035	033 025	016 020	022 024	021 021	024 026	026 026	019 020	017 022	021 021	025 021
F 2	xxx											
T200	+209 +210	+210 +207	+206 +200	+196 +191	+196 +193	+192 +187	+188 +182	+189 +188	+186 +184	+184 +183	+182 +180	+181 +183
T160	+213 +214	+213 +209	+207 +202	+198 +194	+196 +195	+189 +182	+182 +182	+185 +186	+183 +183	+163 +169	+169 +175	+172 +175
T 80	+217 +218	+217 +209	+206 +204	+199 +196	+196 +191	+196 +189	+178 +173	+171 +167	+155 +156	+146 +138	+139 +147	+171 +171
T 40	+225 +226	+224 +206	+201 +201	+194 +191	+191 +184	+180 +186	+183 +178	+171 +167	+160 +154	+148 +142	+136 +133	+133 +130
T 20	+227 +228	+226 +208	+201 +196	+196 +189	+189 +182	+173 +167	+167 +157	+154 +154	+148 +148	+144 +136	+130 +125	+128 +128
T 9	+230 +230	+228 +210	+201 +195	+186 +176	+179 +169	+167 +157	+154 +144	+140 +140	+140 +140	+139 +133	+124 +124	+116 +115
T 2	+233 +233	+230 +212	+202 +191	+176 +166	+158 +147	+140 +136	+136 +127	+121 +113	+113 +109	+106 +106	+105 +104	+104 +102
CT200	-001 -001	-000 -000	-000 -001	-000 -000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000
CT 20	-000 -001	-001 -000	-000 -000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000	-000 +000

240873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	240873
071 073	073 064	063 063	056 050	049 046	049 044	044 035	032 031	029 027	024 016	015 016	008 007	D200
060 061	056 051	046 045	055 052	047 034	044 040	040 029	028 029	025 024	024 011	007 012	009 008	D 80
023 215	012 013	018 020	027 023	029 017	024 034	034 025	021 024	020 016	009 009	002 010	009 009	D 10
042 047	048 046	045 045	049 053	056 062	062 069	051 051</td						

240873

340873

252873

247-248

250873

25007

250873

360873

26007

2020

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	022	021	020	024	029	032	035	039	045	044	048	052
D 80	019	018	012	018	022	027	027	026	035	035	041	045
D 10	016	015	007	012	017	019	017	016	022	021	030	033
F200	058	063	071	088	089	088	085	084	090	093	100	098
F160Z0	xxx											
F120Z0	xxx											
F 80	056	061	071	084	076	070	065	069	074	076	077	072
F 40Z0	xxx											
F 20Z0	xxx											
F 10	041	044	052	055	047	036	031	026	026	030	030	028
F 2	xxx											
T200	+181	+179	+176	+171	+168	+167	+165	+165	+164	+160	+156	+145
T160	+185	+183	+179	+174	+171	+170	+168	+167	+167	+163	+157	+152
T120	+189	+187	+183	+178	+175	+173	+170	+169	+169	+165	+159	+154
T 80	+194	+191	+187	+182	+178	+176	+172	+170	+169	+166	+160	+155
T 40	+198	+196	+191	+186	+182	+178	+173	+169	+169	+165	+157	+153
T 20	+201	+199	+194	+188	+183	+179	+173	+167	+161	+157	+149	+142
T 9	+204	+201	+196	+189	+184	+180	+173	+166	+160	+157	+154	+150
T 2	+209	+204	+199	+191	+185	+180	+172	+164	+157	+153	+151	+147
CT200	-000	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	+000	-000	-000	+000	-000	-000	-000	-000	+000	-000	-000

260873

21225

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
065	065	063	062	060	060	057	056	044	041	037	036	033	036	029	026	032	037	025	025	021	014	016	D 200	
045	044	047	052	052	053	053	047	044	044	043	037	033	023	028	024	020	031	033	023	021	015	007	010	D 80
028	022	028	029	030	030	035	030	037	040	037	031	026	024	024	021	019	030	033	019	020	015	004	006	D 10
103	102	101	101	096	093	090	085	066	051	043	041	049	045	045	045	046	048	046	040	040	046	050	048	051
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 200											
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 160ZC											
072	069	076	077	075	076	056	045	046	049	042	053	051	043	046	041	044	043	036	038	045	049	048	050	F 120ZC
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 80											
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 40ZC											
028	029	030	030	026	026	024	028	036	038	035	039	041	037	035	035	036	037	030	030	037	040	040	042	F 20ZC
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 10											
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 2											
+126	+124	+124	+123	+124	+125	+124	+123	+119	+121	+126	+180	+136	+142	+147	+152	+157	+162	+168	+169	+172	+174	+176	+179	T 200
+123	+123	+126	+126	+127	+127	+124	+118	+119	+125	+130	+134	+140	+146	+151	+156	+161	+167	+172	+174	+176	+178	+180	+183	T 160
+118	+117	+117	+118	+121	+120	+116	+116	+122	+129	+134	+138	+144	+151	+155	+161	+165	+170	+176	+178	+180	+182	+184	+187	T 120
+115	+113	+113	+113	+113	+112	+111	+117	+126	+133	+134	+142	+148	+155	+160	+165	+170	+175	+180	+183	+184	+187	+188	+192	T 80
+110	+108	+105	+106	+105	+105	+110	+120	+130	+137	+143	+147	+153	+160	+165	+170	+174	+180	+185	+188	+189	+191	+193	+196	T 40
+106	+104	+103	+101	+100	+102	+111	+123	+132	+140	+146	+151	+156	+163	+168	+173	+178	+183	+189	+191	+192	+195	+196	+199	T 20
+105	+103	+102	+100	+100	+102	+112	+124	+134	+142	+148	+155	+159	+166	+172	+177	+181	+186	+191	+195	+196	+198	+200	+203	T 9
+102	+100	+100	+097	+098	+103	+113	+126	+136	+145	+152	+159	+166	+173	+179	+184	+188	+194	+197	+203	+205	+207	+209	+209	T 2
+000	-000	-000	-000	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200
+000	+000	-000	-000	-000	+000	+001	+000	-000	-000	+000	+000	+000	+000	-001	+000	-000	-001	-000	-001	-000	-001	-000	-000	CT 20

260873

260873 270873 CABAUW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	017 015 016 015	014 026 031 035	039 041 048 057	060 064 069 074	078 081 085 083	085 083 090 090	096 106 119					
D 80	006 005 006 006	006 014 020 024	026 031 035 039	043 053 060 065	074 078 075 074	074 074 076 075	076 075 076	075 076				
D 10	003 002 005 003	001 014 014 019	018 023 027 028	029 031 035 038	054 052 053 052	045 050 052 039	029					
F200	055 060 061 063	069 079 086 085	084 095 100 099	102 102 101 106	103 103 090 084	090 091 091 097	097 079 072					
F160Z0	xxx xxx xxx xxx											
F120Z0	xxx xxx xxx xxx											
F 80	056 059 062 062	064 073 073 071	079 080 080 074	078 077 072 069	067 064 060 062	070 070 070 073	073 065 063					
F 40Z0	xxx xxx xxx xxx											
F 20Z0	xxx xxx xxx xxx											
F 10	043 047 044 041	042 044 038 030	033 033 031 027	026 022 020 017	018 018 015 013	017 017 019 015	015 015 013 010	010 010 010 010	010 010 010 010	010 010 010 010	010 010 010 010	010 010 010 010
F 2	xxx xxx xxx xxx											
T200	+181 +180 +177 +174	+168 +166 +162 +160	+158 +162 +167 +171	+172 +173 +173 +173	+175 +175 +179 +186	+187 +185 +181 +187	+187 +185 +181 +187	+187 +185 +181 +187	+187 +185 +181 +187	+187 +185 +181 +187	+187 +185 +181 +187	+187 +185 +181 +187
T160	+184 +184 +181 +177	+171 +166 +163 +161	+157 +156 +159 +163	+166 +170 +171 +161	+169 +169 +176 +176	+184 +185 +181 +181	+184 +185 +181 +181	+184 +185 +181 +181	+184 +185 +181 +181	+184 +185 +181 +181	+184 +185 +181 +181	+184 +185 +181 +181
T120	+188 +187 +185 +181	+174 +169 +165 +162	+158 +156 +155 +156	+158 +156 +155 +156	+158 +158 +158 +158	+152 +152 +156 +155	+155 +155 +171 +171	+155 +155 +171 +171	+155 +155 +171 +171	+155 +155 +171 +171	+155 +155 +171 +171	+155 +155 +171 +171
T 80	+193 +192 +189 +185	+185 +178 +172 +167	+164 +158 +156 +156	+155 +154 +155 +154	+155 +154 +155 +155	+158 +158 +158 +158	+146 +147 +148 +149	+146 +147 +148 +149	+146 +147 +148 +149	+146 +147 +148 +149	+146 +147 +148 +149	+146 +147 +148 +149
T 40	+197 +196 +193 +189	+189 +181 +175 +168	+163 +157 +153 +150	+148 +147 +148 +148	+149 +149 +149 +149	+141 +141 +141 +141	+139 +139 +138 +138	+139 +138 +138 +138	+139 +138 +138 +138	+139 +138 +138 +138	+139 +138 +138 +138	+139 +138 +138 +138
T 20	+200 +199 +196 +191	+193 +183 +176 +168	+160 +154 +150 +150	+145 +143 +143 +143	+140 +140 +140 +140	+139 +139 +139 +139	+138 +138 +138 +138	+138 +138 +138 +138	+138 +138 +138 +138	+138 +138 +138 +138	+138 +138 +138 +138	+138 +138 +138 +138
T 9	+204 +202 +198 +194	+185 +177 +168 +159	+153 +149 +144 +144	+144 +144 +144 +144	+138 +137 +136 +134	+134 +134 +134 +134	+129 +129 +129 +129	+129 +129 +129 +129	+129 +129 +129 +129	+129 +129 +129 +129	+129 +129 +129 +129	+129 +129 +129 +129
T 2	+210 +207 +202 +196	+187 +177 +167 +156	+151 +146 +141 +141	+136 +132 +130 +125	+124 +123 +123 +123	+120 +114 +112 +112	+112 +112 +112 +112	+112 +112 +112 +112	+112 +112 +112 +112	+112 +112 +112 +112	+112 +112 +112 +112	+112 +112 +112 +112
CT200	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000
CT 20	-001 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000	-000 -000 -000 -000

270873

270873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
124 127 130 127	124 117 114 108	112 112 103 096	099 099 099 099	094 094 094 094	099 099 099 099	090 090 090 090	089 089 089 089	084 084 084 084	080 080 080 080	075 075 075 075	072 072 072 072
076 081 083 088	080 087 093 093	096 095 105 104	089 089 095 091	088 088 099 099	082 082 099 099	090 090 099 099	091 091 099 099	090 090 099 099	090 090 099 099	090 090 099 099	090 090 099 099
027 025 022 019	031 042 053 048	096 096 107 091	092 092 100 096	079 079 106 102	118 118 102 117	155 155 117 155	259 259 106 259	022 022 022 022	020 020 020 020	022 022 022 022	D200 D80
062 056 050 044	039 035 037 034	034 037 044 053	054 054 034 036	043 043 041 041	034 034 027 027	020 020 013 005	008 008 005 008	F200			
xxx xxx xxx xxx											
xxx xxx xxx xxx											
055 049 042 040	044 051 050 051	056 056 051 051	039 039 019 019	015 015 015 015	021 021 021 021	032 032 032 032	029 029 029 029	024 024 018 013	006 006 010 013	010 010 010 010	F160Z0 F120Z0
xxx xxx xxx xxx											
xxx xxx xxx xxx											
010 010 011 016	016 016 014 013	015 015 013 013	014 014 016 015	016 016 015 015	017 017 020 022	026 026 032 032	031 031 029 029	027 027 019 019	012 012 012 012	010 010 010 010	F 80 F 40Z0
xxx xxx xxx xxx											
+194 +192 +191 +190	+192 +191 +191 +190	+190 +189 +188 +189	+188 +187 +186 +187	+185 +185 +184 +185	+186 +186 +185 +187	+183 +183 +182 +183	+183 +183 +182 +183	+183 +183 +182 +183	+183 +183 +182 +183	+183 +183 +182 +183	+183 +183 +182 +183
+188 +189 +189 +188	+189 +188 +187 +187	+184 +185 +185 +184	+185 +185 +184 +185	+183 +183 +182 +183	+186 +186 +185 +186	+180 +180 +179 +180	+180 +180 +179 +180	+180 +180 +179 +180	+180 +180 +179 +180	+180 +180 +179 +180	+180 +180 +179 +180
+166 +169 +172 +172	+174 +169 +173 +174	+169 +165 +165 +165	+165 +165 +165 +165	+167 +167 +167 +167	+168 +168 +167 +168	+177 +177 +176 +177	+177 +177 +176 +177	+177 +177 +176 +177	+177 +177 +176 +177	+177 +177 +176 +177	+177 +177 +176 +177
+145 +146 +145 +145	+146 +146 +145 +145	+146 +146 +145 +145	+145 +145 +144 +145	+144 +144 +143 +144	+145 +145 +144 +145	+146 +146 +145 +146	+146 +146 +145 +146	+146 +146 +145 +146	+146 +146 +145 +146	+146 +146 +145 +146	+146 +146 +145 +146
+131 +131 +129 +129	+127 +126 +125 +125	+124 +124 +124 +124	+124 +124 +123 +124	+124 +124 +123 +124	+125 +125 +124 +125	+127 +127 +126 +127	+128 +128 +127 +128	+128 +128 +127 +128	+128 +128 +127 +128	+128 +128 +127 +128	+128 +128 +127 +128
+121 +120 +118 +118	+110 +111 +111 +111	+116 +116 +116 +116	+116 +116 +115 +116	+116 +116 +115 +116	+117 +117 +116 +117	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120
+115 +113 +107 +107	+109 +111 +111 +111	+116 +116 +116 +116	+116 +116 +115 +116	+116 +116 +115 +116	+117 +117 +116 +117	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120	+120 +120 +119 +120
+100 +093 +086 +092	+092 +086 +091 +090	+098 +091 +090 +089	+095 +091 +090 +089	+093 +091 +090 +089	+097 +091 +090 +089	+098 +098 +097 +096	+099 +098 +097 +096	+099 +098 +097 +096	+099 +098 +097 +096	+099 +098 +097 +096	+099 +098 +097 +096
+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000
+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000	+000 +000 +000 +000

270873

270873 280873 CABAUW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	358 002 015 016	017 020 032 052	059 056 054 055	056 055 056 056	062 061 113 176	212 212 234 233	234 233 228 228	228 228 209 209	209 209 234 234	234 234 264		
D 80	347 001 022 021	023 026 032 041	048 045 044 043	049 058 066 062	062 061 126 176	208 208 230 230	230 230 240 240	240 240 219 219	219 219 240 240	240 240 240 240	192 192 192 192	192 192 192 192
D 10	338 001 018 019	019 018 021 030	027 024 020 026	031 037 035 037	031 037 040 040	037 037 037 037	037 037 037 037	037 037 037 037	037 037 037 037	037 037 037 037	192 192 192 192	192 192 192 192
F200	013 025 043 052	054 056 066 078	083 079 077 081	081 081 082 082	075 075 076 076	043 043 04						

280873

280873

290873

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	005	019	023	018	016	019	012	011	016	016	014	017
D 80	007	026	029	016	011	012	008	014	013	010	004	006
D 10	004	024	025	009	005	003	004	016	013	006	355	358
F 200	044	044	054	056	069	070	078	085	085	084	080	076
F 160Z0	xxx											
F 120Z0	xxx											
F 80	040	042	049	040	059	057	067	065	061	066	068	074
F 40Z0	xxx											
F 20Z0	xxx											
F 10	028	028	028	021	033	028	031	027	026	027	025	024
F 2	xxx											
T 200	+189	+189	+186	+185	+183	+181	+174	+165	+164	+159	+156	+156
T 160	+193	+193	+187	+188	+187	+184	+173	+165	+163	+161	+159	+157
T 120	+197	+196	+192	+191	+190	+187	+177	+167	+164	+163	+162	+159
T 80	+203	+200	+196	+194	+194	+190	+179	+170	+166	+165	+161	+161
T 40	+205	+204	+199	+198	+197	+192	+180	+171	+167	+168	+160	+156
T 20	+207	+206	+201	+199	+198	+191	+179	+170	+167	+163	+156	+152
T 9	+209	+207	+202	+200	+198	+191	+179	+170	+168	+166	+156	+148
T 2	+211	+208	+203	+201	+199	+189	+177	+169	+167	+161	+150	+145
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	+000	-000	-000	-000	+000	+000

290873

290873

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
014	023	014	012	021	031	033	059	071	066	111	180
013	031	013	006	017	039	041	062	076	083	138	144
357	035	360	356	002	047	043	062	086	093	075	119
027	029	030	031	030	031	031	028	020	015	005	008
xxx											
xxx											
019	020	024	026	027	026	023	024	017	013	003	008
xxx											
xxx											
007	007	012	011	012	011	012	014	014	011	004	009
xxx											
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+144	+145	+146	+147	+148	+148
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+157	+158	+159	+160
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+153	+153	+153	+154	+155	+156	+157	+158	+159
+152	+152	+152	+152	+152	+152	+153	+154	+155	+156	+157	+158
+149	+149	+149	+149	+149	+149	+150	+150	+151	+152	+153	+154
+140	+140	+140	+140	+140	+140	+141	+142	+143	+144	+145	+145
+143	+144	+144	+144	+144	+144	+145	+146	+147	+148	+149	+149
+147	+147	+148	+148	+147	+147	+148	+149	+150	+151	+152	+152
+150	+150	+151	+151	+151	+151	+151	+153	+154	+155	+156	+156
+153	+153	+153	+15								

300873

510873

31/08/73															
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15				
318 314	316 314	313 309	290 293	294 285	291 293	295 297	287 292	284 285	279 274	275 278	283 277	D 200			
307 307	304 302	298 291	276 270	268 267	287 292	293 293	283 288	283 285	277 269	274 280	274 274	D 80			
273 275	270 250	269 252	264 261	259 262	287 292	295 295	xxx xxx	xxx xxx	xxx xxx	269 272	279 285	278 278	D 10		
095 095	088 078	076 074	074 066	067 065	072 077	079 080	080 088	083 089	089 086	081 081	089 088	087 084	F 200		
xxx xxx	F 160														
xxx xxx	F 160	ZO													
068 071	062 058	057 059	067 058	052 049	065 072	076 072	074 075	078 084	080 076	083 083	083 081	079 079	F 80		
xxx xxx	F 40	ZO													
xxx xxx	F 20	ZO													
023 027	020 010	013 016	034 034	034 035	050 055	061 058	062 053	061 070	068 070	070 068	067 066	066 066	F 10		
xxx xxx	F 2														
*137 *137	*138 *138	*138 *138	*139 *137	*137 *139	*138 *138	*142 *144	*143 *142	*138 *143	*145 *147	*147 *148	*148 *148	*148 *148	T 200		
*139 *139	*140 *141	*141 *141	*141 *140	*141 *141	*140 *142	*146 *148	*147 *146	*142 *147	*149 *152	*152 *152	*152 *152	*152 *152	T 160		
*140 *141	*141 *143	*143 *143	*143 *142	*143 *143	*143 *146	*150 *151	*151 *151	*150 *145	*153 *155	*155 *156	*156 *156	*156 *156	T 120		
*137 *140	*139 *140	*142 *141	*141 *138	*143 *144	*146 *150	*155 *156	*155 *155	*149 *156	*161 *161	*162 *161	*161 *161	*161 *159	T 80		
*126 *128	*128 *128	*128 *129	*129 *127	*132 *140	*144 *149	*154 *159	*160 *159	*159 *159	*152 *160	*162 *165	*165 *165	*165 *165	T 40		
*113 *113	*114 *114	*112 *114	*114 *118	*131 *141	*148 *151	*161 *161	*163 *161	*162 *153	*163 *165	*168 *168	*168 *168	*168 *168	T 20		
*105 *106	*105 *106	*099 *101	*108 *101	*141 *149	*152 *157	*163 *164	*162 *163	*154 *165	*157 *171	*171 *171	*170 *170	*170 *169	*168 *168	T 9	
*086 *093	*090 *090	*090 *091	*099 *130	*143 *150	*153 *159	*166 *166	*164 *167	*155 *170	*172 *177	*177 *176	*176 *174	*172 *172	T 2		
*000 *000	*000 *000	*000 *000	*000 *000	-001 *000	-000 *000	-001 *001	-001 *001	-001 *000	-001 *001	-001 *001	-001 *001	-001 *001	C 200		
*000 *001	*000 *001	*000 *000	*000 *000	-000 *000	-000 *000	-000 *000	-000 *000	-000 *000	-000 *001	-001 *001	-001 *001	-001 *001	C 20		

310873

GMT	310873												010973			CABAUW	
	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03					
D 200	276	269	270	265	257	248	247	244	240	235	234	235	240	234	233	235	237
D 80	274	266	244	260	259	241	239	233	229	224	223	221	223	219	221	224	228
D 10	278	270	268	265	263	247	244	235	227	227	229	222	222	219	226	227	230
F 200	085	087	092	086	074	086	099	097	104	115	119	114	114	109	119	123	131
F 16UZ0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	125
F 12UZ0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	116
F 80	079	082	045	071	060	065	080	075	078	084	085	078	078	079	088	094	103
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	086
F 2 UZ0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	091
F 10	065	066	068	056	041	044	054	049	049	048	054	044	044	046	063	068	065
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	055
T 200	+146	+146	+146	+145	+144	+145	+147	+147	+148	+149	+149	+148	+147	+133	+143	+146	+145
T 160	+150	+150	+150	+149	+147	+149	+150	+150	+151	+152	+152	+150	+149	+144	+149	+148	+141
T 120	+153	+153	+154	+153	+150	+152	+153	+154	+153	+154	+153	+151	+136	+149	+152	+151	+140
T 80	+158	+158	+158	+157	+153	+155	+157	+157	+156	+155	+156	+155	+153	+158	+153	+155	+142
T 40	+162	+162	+162	+160	+156	+158	+159	+159	+157	+157	+158	+157	+155	+154	+150	+149	+143
T 20	+165	+164	+164	+162	+158	+160	+160	+159	+157	+157	+158	+157	+155	+141	+140	+158	+147
T 9	+166	+165	+165	+163	+158	+160	+160	+159	+157	+156	+158	+157	+157	+142	+139	+158	+156
T 2	+170	+168	+166	+163	+158	+159	+158	+157	+155	+155	+155	+155	+153	+154	+157	+154	+147
C 1200	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	*	*	*	
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-008	-000	-000	-000

010473

010973

01097

030973

CARAVAN

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D 200	253	251	245	246	247	243	243	249	245	241	240	242	242	240	239	241	239	237	233	236	239	240	246	241	
D 80	248	244	237	240	242	239	237	243	239	236	235	236	235	235	230	228	231	226	222	218	221	224	224	227	224
D 10	254	252	244	247	250	246	246	249	246	243	241	241	240	234	231	234	229	224	223	229	228	229	228	230	228
F 200	101	104	116	133	119	106	106	126	137	123	121	124	115	104	110	108	099	105	109	106	110	104	101	108	
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	093	099	107	115	102	091	091	100	110	107	102	102	095	085	086	084	079	080	084	078	081	078	071	079	
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 1u	077	078	084	091	078	070	066	080	082	078	072	077	071	062	062	063	055	055	058	055	057	053	049	052	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+171	+171	+170	+171	+167	+166	+165	+162	+161	+159	+157	+155	+153	+151	+149	+149	+148	+147	+144	+147	+146	+145	+147	+146	
T 160	+175	+175	+174	+174	+171	+170	+168	+166	+165	+162	+160	+158	+156	+155	+152	+152	+149	+143	+144	+149	+148	+145	+146	+146	
T 120	+179	+179	+177	+178	+175	+174	+172	+169	+168	+166	+164	+162	+160	+158	+156	+156	+151	+144	+146	+152	+151	+147	+147	+148	
T 80	+183	+183	+181	+182	+178	+177	+175	+173	+172	+170	+167	+165	+163	+161	+159	+159	+155	+145	+151	+151	+154	+148	+149	+149	
T 40	+187	+187	+185	+185	+182	+181	+179	+176	+175	+173	+171	+169	+167	+165	+162	+162	+157	+147	+154	+158	+158	+153	+151	+151	
T 20	+190	+189	+187	+187	+183	+182	+180	+177	+176	+174	+171	+170	+168	+166	+163	+164	+164	+161	+159	+158	+160	+160	+158	+152	
T 9	+191	+190	+188	+187	+184	+183	+180	+178	+177	+173	+171	+170	+168	+166	+164	+164	+164	+161	+159	+158	+160	+160	+158	+159	
T 2	+194	+192	+190	+188	+184	+182	+179	+177	+176	+172	+170	+169	+167	+166	+164	+162	+159	+157	+160	+160	+158	+158	+158	+158	
CT 200	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 20	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	-000	-009	+000	+001	-000	-000	-000	

020973

030973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15														
241	246	246	244	245	244	242	256	300	316	312	307	290	263	255	249	261	278	271	270	262	254	259	263	D 200	
225	229	228	227	225	224	225	257	324	318	315	326	291	257	245	235	249	275	274	257	256	244	250	260	D 80	
229	231	229	228	227	227	230	264	333	328	314	336	294	256	250	238	253	280	279	269	263	246	254	265	D 10	
102	109	106	110	114	108	101	075	049	049	041	033	031	031	031	039	038	053	053	059	051	051	058	068	N 64	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 200												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 1602												
075	077	076	078	078	075	076	057	034	034	031	031	023	022	025	027	036	044	037	037	046	054	057	060	F 80	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z												
051	052	048	052	049	050	043	025	022	027	025	020	023	020	023	028	032	032	035	041	048	046	048	148	F 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2												
*147	+149	*152	+152	+153	+154	+154	+153	+142	+137	+139	+136	+134	+139	+140	+140	+140	+142	+142	+148	+147	+151	+165	+171	T 200	
+147	+150	+152	+153	+154	+155	+155	+154	+142	+139	+140	+137	+136	+141	+142	+142	+142	+144	+144	+147	+153	+156	+166	+172	+175	T 160
+148	+151	+153	+154	+155	+155	+157	+154	+142	+141	+142	+139	+138	+142	+144	+144	+144	+146	+146	+147	+152	+157	+170	+176	+179	T 120
+150	+152	+155	+155	+156	+156	+156	+155	+144	+143	+144	+141	+141	+144	+148	+152	+153	+153	+152	+156	+158	+174	+180	+183	T 80	
+152	+153	+156	+157	+157	+158	+160	+156	+146	+145	+147	+143	+143	+147	+148	+155	+157	+157	+157	+165	+168	+178	+183	+187	T 40	
+153	+154	+157	+157	+158	+158	+159	+161	+157	+147	+147	+148	+145	+145	+158	+158	+159	+159	+159	+167	+171	+180	+184	+189	T 20	
+160	+160	+157	+157	+158	+158	+159	+161	+158	+148	+147	+149	+146	+146	+149	+150	+150	+151	+153	+154	+160	+167	+182	+187	+190	T 0
+160	+160	+157	+158	+158	+159	+159	+162	+159	+149	+149	+151	+147	+148	+152	+156	+161	+161	+163	+168	+164	+169	+181	+192	T 2	
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-003	-006	-007	-005	-003	-001	-004	-002	-006	-000	CT 200	
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-002	-002	-006	-004	-003	-001	-004	-001	-000	-000	CT 200	

020973

8383

八五〇〇

030973

2707

032973

七

040473

040973

050021

050973

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	CABA UW												
D200	186	225	296	065	058	017	319	286	268	261	276	279	278	274	274	272	269	264	260	258	265	262	254	256	
D 80	150	193	020	054	048	018	323	274	257	277	283	282	281	273	269	264	273	273	265	263	231	223	226	225	224
D 10	151	076	028	046	041	357	307	257	235	287	297	277	276	278	265	268	274	235	233	150	174	204	211	211	214
F200	011	006	002	002	004	009	013	046	054	045	061	074	067	079	097	115	114	110	090	058	049	037	032	030	
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	008	000	007	012	018	017	026	049	048	046	056	065	083	086	083	081	086	061	053	025	031	050	055	054	
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	008	002	008	009	010	013	022	030	023	027	028	021	030	036	032	028	025	022	020	012	016	016	018	025	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
T200	+257	+258	+259	+259	+28	+256	+254	+246	+245	+242	+243	+240	+238	+231	+227	+225	+213	+210	+199	+192	+186	+185	+182		
T160	+261	+262	+262	+262	+261	+259	+256	+248	+246	+244	+246	+242	+236	+229	+228	+223	+210	+205	+199	+194	+191	+184	+181	+174	
T120	+265	+266	+266	+264	+262	+258	+249	+246	+246	+247	+243	+233	+225	+223	+219	+211	+202	+197	+192	+190	+180	+175	+168		
T 80	+269	+269	+269	+268	+267	+265	+259	+248	+247	+250	+242	+222	+219	+211	+211	+208	+201	+194	+189	+187	+176	+173	+169		
T 40	+272	+273	+272	+271	+269	+266	+256	+243	+241	+248	+250	+245	+231	+216	+209	+206	+202	+191	+196	+193	+187	+181	+173	+169	
T 20	+274	+274	+273	+269	+265	+260	+253	+236	+235	+242	+239	+222	+210	+203	+202	+197	+195	+192	+190	+181	+176	+170	+167	+167	
T 2	+277	+276	+270	+261	+255	+242	+231	+225	+231	+231	+227	+217	+205	+199	+198	+194	+192	+189	+186	+177	+172	+168	+165	+165	
CT200	+001	+001	+002	+002	+002	+001	+001	-001	-000	+000	-000	-000	+000	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	-000	
CT 20	-001	-001	-000	-001	-001	-001	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	

060973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	060973													
259	240	237	235	234	228	247	237	231	227	228	225	222	225	231	229	232	236	238	237	239	247	255	274	0200	
226	228	221	223	222	225	237	232	224	223	220	218	211	217	223	220	222	225	224	222	231	235	252	270	0 80	
229	230	223	228	227	233	239	237	231	233	226	225	217	222	230	225	229	230	224	227	237	240	258	274	0 10	
041	043	040	041	047	049	050	046	046	042	042	046	051	050	053	056	059	062	062	062	062	055	049	041	F200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0													
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80													
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0													
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0													
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2													
+166	+160	+159	+158	+155	+155	+155	+156	+157	+158	+157	+158	+161	+165	+167	+169	+171	+171	+171	+174	+174	+183	+190	+196	T200	
+162	+162	+161	+159	+157	+155	+157	+158	+158	+159	+159	+160	+163	+167	+168	+171	+173	+174	+174	+175	+178	+188	+200		T160	
+163	+164	+163	+161	+159	+157	+159	+160	+160	+161	+161	+162	+165	+169	+170	+173	+175	+175	+176	+178	+187	+192	+198	+204	T120	
+165	+166	+164	+163	+160	+159	+161	+162	+162	+163	+163	+164	+167	+173	+172	+175	+177	+177	+179	+181	+184	+191	+196	+202	+208	T 80
+166	+168	+167	+165	+164	+162	+161	+163	+164	+164	+165	+167	+169	+173	+175	+178	+182	+182	+185	+188	+185	+188	+195	+200	+212	T 40
+167	+169	+168	+166	+164	+163	+164	+166	+167	+167	+167	+170	+172	+175	+179	+183	+185	+185	+188	+188	+191	+198	+202	+208	+214	T 20
+168	+170	+169	+167	+164	+163	+165	+167	+169	+170	+172	+174	+176	+178	+183	+186	+186	+191	+191	+191	+198	+200	+203	+210	+216	T 9
-000	+000	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	T 2
+000	+000	+000	+000	+000	+000	+000	+001	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT200
CT 20	-000	-000	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20

060973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	060973	070973	070973											
324	314	310	304	290	277	263	258	254	259	263	254	258	256	259	266	269	288	300	302	308	315	316	0200		
256	258	211	198	196	197	200	201	207	208	210	209	217	245	258	272	282	299	300	305	315	312	315	D 80		
172	159	155	160	157	161	174	177	182	197	194	209	208	208	228	253	266	280	287	305	303	307	320	314	313	D 10
029	025	023	021	024	026	028	031	036	038	041	038	028	025	025	030	029	033	034	037	035	039	040	F200		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F120Z0														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2														
+186	+187	+187	+186	+185	+185	+184	+185	+187	+185	+184	+182	+185	+192	+197	+202	+205	+206	+210	+212	+213	+211	+211	+211	T200	
+186	+187	+188	+186	+185	+185	+184	+185	+187	+185	+184	+182	+185	+186	+187	+1										

070973

070973

080973

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	319	322	329	337	343	352	356	002	017	022	032	052
D 80	320	321	329	344	341	345	350	348	353	001	019	042
D 10	320	324	332	350	345	346	346	344	349	011	004	016
F200	035	037	032	036	031	027	032	030	024	029	040	035
F160Z0	xxx											
F120Z0	xxx											
F 80	035	039	031	036	039	038	040	041	040	046	046	041
F 40Z0	xxx											
F 20Z0	xxx											
F 10	031	031	024	021	020	019	019	016	014	017	018	013
F 2	xxx											
T200	+206	+205	+203	+200	+199	+199	+196	+195	+195	+192	+185	+184
T160	+210	+209	+207	+204	+203	+202	+199	+197	+197	+194	+187	+187
T120	+214	+213	+210	+208	+206	+206	+202	+199	+197	+195	+189	+185
T 80	+218	+217	+214	+211	+209	+208	+204	+201	+198	+195	+190	+186
T 40	+222	+220	+218	+214	+211	+208	+204	+201	+195	+191	+186	+185
T 20	+224	+222	+220	+214	+210	+205	+199	+193	+187	+181	+176	+174
T 9	+225	+223	+220	+215	+209	+203	+195	+187	+180	+174	+171	+166
T 2	+227	+224	+220	+213	+204	+195	+187	+175	+160	+151	+149	+144
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

080973

080973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
122	125	122	118	126	116	121	125	127	128	104	087
089	057	095	095	084	075	083	099	086	074	052	059
040	031	063	043	016	032	036	049	060	065	041	046
033	026	025	031	038	039	032	031	030	024	021	020
xxx											
xxx											
041	034	046	046	040	047	045	048	042	029	019	022
xxx											
xxx											
010	010	010	015	013	010	013	016	018	017	020	019
xxx											
+176	+179	+181	+180	+175	+170	+170	+171	+177	+178	+175	+176
+176	+176	+177	+177	+172	+166	+167	+170	+175	+175	+171	+184
+176	+172	+172	+173	+168	+163	+163	+173	+173	+168	+180	+187
+177	+175	+171	+169	+165	+159	+163	+165	+168	+162	+176	+184
+163	+162	+166	+161	+147	+146	+148	+147	+152	+161	+172	+180
+140	+136	+142	+139	+115	+115	+117	+122	+131	+141	+152	+171
+129	+116	+124	+126	+110	+110	+113	+119	+130	+143	+152	+161
+113	+111	+111	+110	+108	+107	+113	+119	+132	+145	+155	+165
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-001	-000	+001	+000	+000	+000	+000	+012	+018	+001

080973

080973

090973

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	028	033	041	042	048	052	057	061	063	064	067	066
D 80	015	017	016	016	020	027	036	040	045	049	044	046
D 10	011	012	013	011	008	014	018	018	021	012	017	016
F200	060	062	068	075	074	070	074	082	089	092	097	101
F160Z0	xxx											
F120Z0	xxx											
F 80	060	061	043	068	067	063	072	074	071	070	067	073
F 40Z0	xxx											
F 20Z0	xxx											
F 10	041	040	039	035	029	025	026	024	020	023	024	024
F 2	xxx											
T200	+206	+206	+207	+207	+205	+202	+199	+197	+198	+200	+199	+203
T160	+209	+207	+205	+207	+204	+201	+197	+194	+194	+195	+199	+201
T120	+213	+210	+205	+204	+207	+203	+199	+194	+195	+192	+195	+198
T 80	+217	+213	+208	+206	+206	+202	+201	+199	+195	+192	+190	+186
T 40	+221	+217	+212	+209	+206	+198	+193	+190	+185	+183	+178	+178
T 20	+223	+219	+214	+210	+206	+197	+187	+182	+177	+173	+169	+168
T 9	+225	+221	+215	+211	+206	+196	+186	+180	+175	+171	+165	+165
T 2	+228	+223	+216	+211	+206	+194	+183	+174	+168	+161	+157	+157
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

090973

090973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
053	048	040	041	043	047	035	032	044	048	034	030	
018	030	029	017	014	021	031	029	032	027	024	018	
016	027	020	020	014	022	036	026	029	032	024	021	
054	057	065	072	067	055	034	029	044	062	050	049	
xxx												
xxx												
051	047	038	040	034	031	023	029	041	044	049	052	
xxx												
xxx												
032	029	026	027	025	021	017	021	027	030	032	038	
xxx												
*202	*195	*194	*191	*192	*169	*147	*142	*145	*153	*145	*145	*145
*168	*189	*159	*167	*148	*144	*143	*142	*145	*145	*147	*152	*153
*146	*148	*147	*145	*146	*146	*145	*144	*147	*152	*153	*156	*157
*148	*147	*147	*146	*148	*147	*146	*145	*147	*146	*149	*154	*155
*120	*149	*149	*149	*150	*150	*149	*148	*149	*150	*150	*150	*150
*151	*150	*150	*150	*150	*150	*151	*151	*150	*150	*152	*152	*152
*152	*151	*150	*150	*151	*150	*151	*151	*151	*151	*152	*152	*152
*152	*151	*150	*150	*151	*151	*151	*151	*151	*152	*152	*152	*152
*152	*151	*151	*151	*151	*151	*153	*152	*152	*153	*154	*154	*154
*152	*151	*151	*151	*151	*151	*153	*152	*152	*153	*154	*154	*154
*152	*151	*151	*151	*151	*151	*152	*152	*152	*153	*154	*154	*154
*152	*151	*151	*151	*151	*151	*152	*152	*152	*153	*154	*154	*154
*152	*151	*151	*151	*151	*151	*152	*152	*152	*153	*154	*154	*154
*152	*151	*151	*151	*151	*151	*152	*152	*152	*153	*154	*154	*154</

090973

090973

100973

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D200	003	018	027	016	002	349	356	355	349	351	359	012	002	359	359	357	355	360	008	005	004	015	023	023
D 80	008	029	041	042	034	358	344	348	345	348	353	006	003	355	342	334	334	344	353	356	357	013	022	024
D 10	004	027	040	044	036	346	338	343	343	347	350	359	359	343	332	306	312	326	339	350	354	008	015	018
F200	056	038	035	030	033	041	075	080	080	068	058	049	043	057	044	045	057	067	071	073	102	101	090	085
F160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 80	054	037	037	027	023	039	071	059	062	063	049	038	033	040	031	026	041	052	056	066	073	068	072	066
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 10	038	028	024	013	008	020	042	030	024	036	030	021	018	017	016	011	020	021	022	029	039	054	041	036
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
T200	+183	+185	+184	+183	+185	+180	+170	+164	+164	+163	+158	+157	+155	+156	+155	+156	+156	+155	+155	+150	+147	+136	+132	+132
T160	+186	+189	+188	+186	+187	+183	+172	+166	+166	+166	+162	+160	+157	+159	+157	+159	+158	+158	+157	+152	+149	+140	+135	+136
T120	+190	+192	+191	+189	+189	+186	+174	+168	+168	+169	+165	+164	+161	+161	+160	+163	+161	+160	+158	+155	+151	+143	+139	+139
T 80	+195	+196	+195	+193	+192	+189	+177	+170	+169	+172	+169	+167	+164	+163	+162	+163	+163	+163	+160	+157	+153	+147	+142	+142
T 40	+199	+200	+199	+196	+194	+191	+175	+172	+169	+174	+172	+170	+167	+165	+165	+164	+163	+160	+158	+155	+150	+145	+145	+145
T 20	+202	+203	+201	+197	+195	+190	+180	+172	+168	+173	+173	+169	+166	+166	+164	+161	+158	+157	+156	+155	+152	+147	+146	+146
T 9	+203	+205	+202	+197	+194	+190	+180	+172	+167	+173	+173	+172	+170	+167	+166	+163	+158	+156	+157	+156	+155	+152	+147	+147
T 2	+207	+207	+203	+196	+191	+187	+179	+171	+163	+172	+173	+172	+170	+167	+163	+159	+150	+151	+154	+153	+153	+153	+147	+147
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	-000	-000	-000	-000	+000	-000	-000	+000	+000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

100973

100973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
018	021	015	020	028	030	032	034	035	019	023	025
014	014	018	012	017	022	030	031	029	012	026	021
010	007	017	014	011	018	359	015	338	005	023	021
096	084	084	069	063	053	044	057	050	041	038	038
XXX											
078	055	062	060	063	048	034	023	027	033	032	039
XXX											
045	025	026	027	025	016	011	012	016	024	029	027
XXX											
*117	+108	+114	+123	+121	+120	+121	+124	+122	+121	+121	+131
+121	+111	+122	+126	+124	+123	+125	+124	+128	+133	+135	+138
+125	+115	+115	+129	+127	+126	+126	+126	+132	+137	+139	+142
+127	+118	+119	+131	+128	+127	+128	+126	+128	+129	+136	+141
+132	+121	+116	+117	+127	+124	+125	+125	+131	+133	+140	+145
+134	+128	+132	+132	+128	+122	+124	+127	+133	+135	+143	+148
+135	+129	+127	+117	+125	+121	+124	+128	+135	+136	+145	+150
+135	+129	+127	+117	+125	+121	+124	+128	+135	+136	+145	+150
*	*	*	*	*	*	*	*	*	*	*	*
-002	-000	-000	-005	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	-001	-000	+000	+000	+000	+000	+000	+000	+000	+000

100973

100973

110973

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	-20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	010	009	004	008	010	013	007	006	008	012	005	004
D 80	009	008	004	007	007	014	009	006	004	036	003	006
D 10	005	003	002	001	002	004	005	004	035	342	338	327
F200	054	063	056	057	076	080	092	094	088	079	077	074
F160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F 80	050	059	050	054	065	066	070	079	080	067	065	060
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F 10	033	035	030	026	030	024	026	028	021	015	015	012
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
T200	+141	+140	+140	+139	+137	+136	+134	+133	+131	+130	+129	+128
T160	+144	+144	+144	+142	+140	+139	+137	+136	+134	+134	+132	+130
T120	+148	+147	+146	+143	+142	+140	+139	+138	+136	+137	+137	+135
T 80	+152	+151	+151	+149	+146	+144	+141	+141	+139	+138	+136	+134
T 40	+156	+154	+154	+150	+147	+144	+139	+137	+134	+135	+133	+132
T 20	+158	+155	+155	+155	+150	+146	+140	+135	+129	+124	+122	+121
T 9	+159	+156	+156	+156	+156	+156	+140	+135	+129	+124	+119	+118
T 2	+161	+157	+157	+149	+144	+136	+129	+123	+112	+106	+097	+094
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	-000	+000	+000	+000	+000	+000	+000	+000	+001	+001	+000

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
062	038	007	008	014	022	033	026	026	019	017	031
056	014	352	354	351	351	001	001	350	354	012	031
301	331	329	313	264	286	292	336	289	330	003	027
018	016	029	035	036	037	033	031	034	026	036	036
XXX											
012	013	013	018	018	019	024	013	019	029	035	033
XXX											
011	011	010	008	004	005	006	009	011	013	022	028
XXX											



130973

130973

140973

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	
D200	074	077	066	063	058	055	054	054	063	069	078	082	087
D 80	075	076	069	064	057	051	042	036	036	046	056	068	074
D 10	077	073	062	053	047	035	019	021	020	025	029	034	041
F200	048	051	057	068	065	073	072	069	082	087	096	097	112
F160ZO	YXX	XXX	XXX										
F120ZO	XXX	XXX											
F 80	044	043	049	060	053	059	059	071	070	069	073	075	079
F 40ZO	XXX	XXX											
F 20ZO	XXX	XXX											
F 10	029	028	032	030	020	018	019	023	026	025	018	018	019
F 2	XXX	XXX											
T200	+157	+158	+161	+162	+162	+160	+159	+156	+161	+163	+163	+164	+162
T160	+161	+162	+165	+166	+163	+162	+162	+158	+161	+164	+164	+166	+164
T120	+165	+166	+160	+170	+169	+166	+163	+159	+158	+162	+163	+163	+161
T 80	+169	+170	+173	+173	+171	+167	+163	+156	+154	+157	+159	+154	+157
T 40	+173	+174	+176	+175	+170	+165	+158	+146	+147	+144	+142	+142	+145
T 20	+176	+176	+177	+175	+168	+158	+149	+138	+135	+131	+128	+127	+129
T 9	+178	+178	+178	+175	+167	+156	+145	+135	+132	+128	+124	+122	+119
T 2	+179	+179	+178	+173	+161	+148	+135	+127	+123	+118	+113	+112	+108
C1200	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

140973

140973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15		
126	116	105	100	101	101	086	081	076	070	076	074	070	075
069	094	097	096	097	094	089	090	081	071	068	063	074	075
059	056	057	057	054	042	043	051	048	052	050	063	077	068
002	049	044	040	048	055	058	061	066	069	074	079	057	060
XXX	XXX	XXX											
XXX	XXX	XXX											
0/9	075	072	070	065	065	067	064	053	041	029	039	044	061
XXX	XXX	XXX											
XXX	XXX	XXX											
021	020	022	019	011	013	016	022	024	025	024	029	033	046
XXX	XXX	XXX											
+155	+156	+156	+156	+148	+144	+146	+147	+149	+149	+148	+144	+144	+157
+155	+155	+153	+153	+148	+142	+144	+147	+149	+150	+144	+144	+153	+165
+140	+155	+153	+153	+147	+138	+139	+140	+144	+145	+133	+138	+149	+166
+119	+123	+132	+128	+120	+111	+112	+117	+110	+112	+122	+139	+153	+161
+100	+099	+098	+094	+091	+088	+089	+090	+088	+090	+125	+142	+157	+166
+092	+091	+087	+084	+082	+079	+077	+086	+099	+113	+128	+145	+159	+169
+088	+086	+083	+080	+076	+075	+075	+086	+100	+115	+130	+147	+162	+171
+078	+075	+072	+072	+064	+062	+070	+086	+102	+117	+133	+150	+165	+174
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
+000	+000	+001	+001	+001	+000	+000	+000	+001	+001	+000	+000	+000	+000

140973

140973

150973

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	
D200	064	067	064	067	067	065	067	072	075	076	079	084	089
D 80	063	064	043	066	063	058	059	060	061	060	061	064	066
D 10	055	055	055	055	054	033	030	031	034	038	038	037	044
F200	070	073	080	087	082	089	104	108	112	121	128	130	136
F160ZO	XXX	XXX											
F120ZO	XXX	XXX											
F 80	064	063	048	072	069	070	090	090	083	083	085	086	094
F 40ZO	XXX	XXX											
F 20ZO	XXX	XXX											
F 10	043	037	035	032	024	020	022	021	026	023	024	025	027
F 2	XXX	XXX											
T200	+188	+188	+187	+187	+185	+182	+180	+180	+179	+176	+175	+174	+171
T160	+192	+192	+191	+190	+188	+185	+181	+182	+182	+172	+170	+168	+167
T120	+196	+196	+194	+193	+191	+186	+183	+180	+179	+174	+165	+160	+156
T 80	+199	+199	+197	+195	+193	+188	+184	+180	+175	+168	+160	+152	+146
T 40	+203	+203	+199	+194	+190	+182	+175	+168	+161	+154	+148	+139	+137
T 20	+205	+204	+199	+193	+185	+172	+158	+151	+144	+138	+135	+127	+124
T 9	+204	+204	+199	+192	+182	+167	+153	+144	+138	+132	+129	+123	+119
T 2	+207	+204	+197	+187	+173	+154	+136	+124	+118	+115	+110	+106	+102
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

150973

150973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15		
122	128	124	116	114	111	108	110	109	112	116	109	098	091
075	079	081	077	080	080	084	090	091	096	098	093	095	098
056	065	063	058	060	065	075	084	080	097	109	100	099	096
097	091	085	086	082	088	093	092	091	086	071	052	045	049
XXX	XXX	XXX											
XXX	XXX	XXX											
081	084	080	084	079	047	085	070	059	045	040	044	039	034
XXX	XXX	XXX											
029	032	025	025	028	038	039	033	029	028	032	035	028	036
XXX	XXX	XXX											
+158	+165	+162	+158	+158	+159	+160	+162	+164	+166	+167	+160	+157	+160
+144	+152	+154	+151	+156	+159	+162	+165	+166	+168	+161	+149	+154	+163
+120	+121	+117	+125	+134	+135	+152	+146	+141	+141	+147	+156	+166	+177
+106	+107	+107	+104	+105	+110	+116	+127	+138	+148	+159	+170	+181	+191
+101	+100	+104	+104	+105	+110	+116	+127	+138	+148	+159	+170	+181	+191
+097	+098	+097	+094	+095	+099	+107	+116	+128	+143	+155	+165	+177	+187
+095	+097	+095	+092	+089	+094	+098	+107	+118	+130	+145	+156	+167	+180



170973

170973

180973

CABAUV

180973

18097

190973

SABAUW

190973

190973

200973

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	212	217	219	222	228	233	236	245	247	253	260	268
D 80	202	208	209	210	217	223	225	234	235	241	248	256
D 10	207	214	214	215	221	227	230	238	238	243	251	257
F200	101	185	189	177	174	174	173	157	145	142	151	147
F160Z0	xxx											
F120Z0	xxx											
F 80	132	149	157	149	142	139	138	125	116	112	115	119
F 40Z0	xxx											
F 20Z0	xxx											
F 10	086	102	106	100	100	102	105	096	088	083	067	084
F 2	xxx											
T200	*123	*123	*126	*126	*129	*130	*130	*132	*131	*138	*141	*142
T160	*125	*125	*127	*128	*150	*132	*134	*133	*141	*143	*145	*145
T120	*128	*127	*129	*130	*132	*134	*134	*136	*146	*147	*148	*148
T 80	*130	*129	*132	*132	*134	*136	*138	*140	*149	*150	*151	*151
T 40	*132	*131	*134	*134	*136	*138	*138	*140	*144	*152	*153	*154
T 20	*133	*133	*135	*135	*137	*139	*139	*141	*143	*153	*154	*155
T 9	*134	*133	*135	*135	*138	*140	*139	*142	*142	*153	*154	*155
T 2	*134	*134	*136	*136	*138	*140	*140	*142	*142	*152	*153	*154
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-004	-003	+000	-000
CT 20	+000	+000	+002	+000	+000	+000	+000	+000	+005	-000	+000	+000

200973

200973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
266	277	276	290	300	299	299	259	224	221	214	221
259	244	243	253	263	253	243	215	203	201	202	211
236	228	234	219	213	206	200	204	205	210	209	228
073	070	072	081	075	063	052	041	045	040	035	047
xxx											
xxx											
063	055	054	043	036	033	034	054	056	042	045	036
xxx											
034	030	027	021	019	019	018	031	031	029	037	032
xxx											
+134	+135	+135	+134	+134	+133	+133	+130	+128	+128	+129	+139
+136	+137	+138	+135	+136	+134	+135	+132	+131	+132	+129	+133
+138	+139	+138	+134	+133	+133	+133	+132	+132	+136	+142	+145
+138	+138	+136	+133	+132	+132	+134	+134	+130	+132	+135	+147
+139	+137	+135	+132	+132	+131	+131	+127	+128	+133	+136	+144
+139	+135	+132	+128	+128	+125	+124	+124	+129	+135	+138	+142
+137	+133	+129	+125	+125	+120	+119	+123	+130	+136	+139	+143
+126	+124	+119	+116	+110	+103	+108	+122	+131	+138	+141	+153
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	-000	-000

200973

200973

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	109	105	105	102	101	092	090	097	092	102	103	098
D 80	104	096	095	094	093	079	079	080	076	079	077	076
D 10	097	084	084	080	083	067	075	073	056	068	061	053
F200	026	034	041	053	060	074	087	080	091	090	091	098
F160Z0	xxx											
F120Z0	xxx											
F 80	024	032	034	048	060	067	070	056	067	054	055	066
F 40Z0	xxx											
F 20Z0	xxx											
F 10	014	013	013	018	020	023	023	019	025	016	020	024
F 2	xxx											
T200	*156	*156	*156	*155	*155	*154	*154	*155	*156	*152	*149	*145
T160	*160	*159	*158	*158	*158	*157	*158	*158	*158	*151	*154	*154
T120	*164	*163	*163	*162	*162	*161	*158	*156	*154	*152	*150	*152
T 80	*167	*167	*166	*164	*164	*161	*157	*155	*155	*152	*149	*147
T 40	*170	*169	*168	*165	*162	*158	*156	*155	*153	*152	*147	*140
T 20	*171	*169	*167	*164	*160	*156	*154	*154	*151	*151	*150	*149
T 9	*172	*168	*165	*162	*158	*155	*153	*154	*150	*149	*148	*147
T 2	*171	*166	*161	*157	*154	*151	*150	*147	*148	*145	*146	*145
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

210973

210973

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	102	106	129	141	150	154	159	175	182	183	193	204
D 80	081	091	105	118	114	114	125	142	152	166	183	199
D 10	081	091	097	114	117	109	123	132	144	161	182	203
F200	104	102	089	049	092	084	094	093	091	102	100	088
F160Z0	xxx											
F120Z0	xxx											
F 80	074	063	065	066	062	060	064	063	085	086	078	077
F 40Z0	xxx											
F 20Z0	xxx											
F 10	036	026	026	031	037	036	033	031	039	040	042	062
F 2	xxx											
*133	*129	*141	*142	*142	*139	*138	*138	*136	*132	*139	*134	*133
*133	*130	*127	*133	*138	*141	*139	*140	*138	*136	*143	*138	*129
*133	*131	*126	*128	*132	*136	*140	*146	*147	*143	*147	*142	*140
*135	*133	*129	*131	*134	*138	*141	*143	*144	*146	*150	*148	*145
*137	*135	*129	*131	*133	*135	*138	*142	*145	*147	*141	*152	*150
*138	*136	*131	*132	*134	*136	*139	*142	*145	*147	*141	*153	*152
*138	*136	*132	*134	*136	*139	*146	*151	*156	*152	*151	*157	*153
*137	*136	*133	*136	*137	*136	*140	*143	*147	*157	*153	*157	*153
*000	*000	-001	-000	-000	-000	-000	-002	-013	-000	-000	-000	-000
*000	*000	+001	+000	+000	+000	+000	+000	+011	+000	+000	+000	+000

210373

31/03/7

2000

243

220973

330873

220973

32007

8

10

230473

2020

230973

230973

340873

64844

240973

240973

240973

240973

360033

SABAH

250973

260973														270973				CABAJW						
GMT	15-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03	
D200	.223	.217	.210	.217	.228	.219	.184	.172	.182	.176	.173	.178	.172	.179	.197	.197	.200	.214	.213	.223	.222	.213	.211	.219
D 80	.214	.206	.200	.208	.216	.223	.174	.146	.159	.157	.164	.170	.167	.172	.188	.184	.192	.190	.197	.196	.195	.194	.190	
D 10	.217	.194	.187	.194	.207	.185	.125	.123	.136	.134	.136	.154	.154	.170	.190	.168	.167	.174	.174	.188	.180	.178	.176	.197
F200	.141	.040	.349	.045	.044	.030	.031	.041	.045	.045	.054	.061	.073	.077	.090	.086	.073	.082	.082	.084	.081	.069	.068	.069
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	.133	.030	.033	.039	.038	.021	.021	.036	.041	.048	.056	.060	.065	.066	.047	.054	.050	.048	.053	.055	.055	.044	.045	.047
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10Z0	.024	.016	.013	.014	.016	.009	.014	.018	.018	.021	.025	.023	.026	.024	.019	.023	.024	.021	.022	.024	.024	.019	.022	.028
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
T200	+.39	+139	+139	+139	+135	+133	+132	+132	+133	+134	+135	+135	+134	+127	+127	+121	+125	+119	+120	+119	+114	+113	+112	
T160	+143	+142	+142	+142	+138	+136	+135	+135	+136	+137	+138	+137	+138	+117	+115	+115	+121	+122	+121	+120	+117	+113	+113	
T120	+147	+146	+146	+146	+142	+139	+138	+138	+139	+140	+140	+140	+140	+116	+113	+113	+119	+121	+122	+121	+120	+117	+113	+113
T 80	+150	+149	+148	+149	+145	+141	+141	+140	+140	+141	+140	+139	+136	+138	+129	+128	+125	+122	+123	+123	+123	+122	+121	+118
T 40	+154	+152	+152	+150	+149	+146	+143	+142	+141	+141	+139	+137	+135	+131	+131	+129	+129	+127	+124	+124	+124	+124	+118	+119
T 20	+155	+152	+152	+150	+147	+144	+142	+139	+136	+132	+131	+130	+130	+130	+132	+129	+129	+128	+125	+124	+125	+124	+120	+122
T 9	+156	+152	+152	+149	+146	+142	+139	+136	+133	+130	+129	+128	+130	+130	+132	+129	+129	+128	+125	+124	+125	+124	+124	+123
T 2	+156	+150	+146	+142	+138	+132	+127	+129	+126	+124	+126	+128	+128	+130	+127	+127	+126	+124	+124	+124	+124	+124	+124	+124
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	*	*	*	*	*	*	
CT 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	-000	-000	-000	-000	-000	

370973

280973

28

280973

222222

290473

222

2009/10																									
03-04		04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15			
228	218	212	216	220	220	218	215	211	210	208	211	211	218	219	228	258	248	229	222	223	247	238	239	D 200	
213	202	199	203	209	209	207	204	201	200	197	202	202	210	211	220	249	229	216	213	210	240	229	231	D 80	
215	204	204	209	214	213	212	209	205	204	203	209	209	215	216	228	255	229	219	218	215	245	233	235	D 10	
108	117	126	135	134	130	137	131	121	121	133	151	127	104	111	124	143	104	100	083	110	143	114	108	F 200	
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX		
087	090	098	103	104	097	108	103	092	092	105	125	106	085	097	115	103	066	074	071	092	110	086	094	F 80	
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX		
058	055	060	063	063	069	066	061	060	071	084	072	062	074	092	076	045	057	058	068	078	063	076	F 20		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 2		
*103	*103	*102	*101	*099	*098	*095	*094	*092	*092	*089	*079	*067	*076	*088	*087	*062	*062	*074	*075	*073	*071	*090	*104	T 200	
+106	+105	+105	+103	+102	+101	+098	+096	+095	+095	+093	+086	+079	+086	+092	+090	+064	+066	+078	+078	+080	+074	+103	+107	T 160	
+108	+107	+108	+106	+105	+104	+103	+099	+098	+096	+084	+074	+087	+096	+094	+067	+069	+076	+081	+078	+076	+101	+111	T 120		
+112	+110	+110	+109	+108	+107	+104	+103	+102	+102	+100	+087	+084	+094	+100	+098	+069	+072	+079	+083	+085	+079	+098	+115	T 80	
+115	+112	+112	+113	+112	+111	+109	+107	+106	+105	+105	+103	+091	+080	+098	+105	+102	+072	+075	+083	+086	+093	+081	+105	+119	T 40
+116	+113	+113	+114	+112	+112	+110	+108	+107	+107	+106	+105	+092	+082	+096	+107	+105	+074	+078	+085	+097	+096	+083	+098	+121	T 20
+116	+113	+113	+115	+114	+112	+111	+109	+108	+107	+107	+105	+094	+082	+102	+109	+106	+075	+079	+089	+105	+098	+084	+096	+121	T 9
+115	+113	+113	+114	+113	+111	+110	+108	+108	+107	+107	+105	+095	+084	+104	+111	+109	+076	+081	+091	+094	+091	+086	+099	+122	T 2
*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*			
-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-002	-008	-004	-000	-003	-014	-008	-014	-018	-020	-012	-000	C 200		
+000	+000	+000	+000	+000	+000	+001	+001	+000	+000	+000	-010	-006	+000	+000	+003	+000	+001	+009	+005	+000	-007	+000	C 20		

290973

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D 200	241	243	241	238	225	225	218	215	210	213	218	221
D 80	234	237	234	227	215	219	210	207	198	200	204	208
D 10	240	243	239	226	207	225	212	210	200	202	208	210
F 200	107	117	109	106	095	107	117	121	130	132	133	137
F 160Z0	xxx											
F 120Z0	xxx											
F 80	096	101	094	084	073	086	082	096	094	099	111	098
F 40Z0	xxx											
F 20Z0	xxx											
F 10	077	079	066	051	043	049	046	058	055	060	067	059
F 2	xxx											
T 200	+108	+110	+109	+109	+110	+087	+086	+077	+074	+082	+086	+078
T 160	+112	+114	+113	+113	+113	+089	+095	+080	+084	+086	+089	+086
T 120	+116	+117	+116	+115	+116	+091	+091	+082	+079	+080	+080	+082
T 80	+120	+124	+120	+117	+117	+093	+093	+085	+085	+091	+094	+086
T 40	+123	+124	+122	+119	+114	+093	+086	+087	+083	+091	+095	+092
T 20	+125	+125	+122	+117	+110	+094	+086	+088	+084	+087	+089	+089
T 9	+126	+125	+122	+115	+107	+094	+085	+089	+095	+093	+090	+090
T 2	+126	+124	+119	+110	+098	+101	+099	+089	+085	+079	+091	+091
CT 200	-001	-000	-000	-000	-000	-013	-013	-012	-016	-007	-000	-000
CT 20	+000	+000	+000	+000	+000	+002	-005	+000	+004	-012	+000	+000
	*	*	*	*	*	*	*	*	*	*	*	*
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

300973

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	300973
213	211	212	215	221	212	213	216	214	222	215	219	221
199	196	197	199	199	195	196	197	196	211	205	208	205
204	201	201	202	202	199	199	200	198	215	210	213	209
153	158	155	160	151	149	147	140	136	131	129	132	131
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
122	123	117	125	127	119	118	114	111	113	108	110	073
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
078	077	076	052	061	073	078	075	077	079	077	072	064
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+083	+083	+084	+084	+084	+089	+085	+091	+092	+090	+087	+093	+095
+084	+085	+086	+086	+086	+088	+092	+094	+094	+092	+089	+095	+100
+086	+087	+087	+087	+087	+091	+091	+091	+091	+090	+090	+090	+090
+088	+089	+090	+090	+091	+092	+092	+096	+096	+099	+099	+099	+099
+091	+091	+091	+091	+091	+094	+094	+094	+094	+091	+091	+091	+091
+092	+092	+092	+092	+094	+094	+094	+094	+094	+101	+101	+100	+100
+092	+092	+092	+092	+094	+094	+094	+094	+094	+102	+102	+100	+100
+092	+092	+092	+092	+094	+094	+094	+094	+094	+103	+103	+103	+103
+092	+092	+093	+093	+094	+094	+094	+094	+094	+103	+103	+103	+103
+092	+093	+093	+093	+094	+094	+094	+094	+094	+104	+104	+104	+104
+092	+093	+093	+093	+094	+094	+094	+094	+094	+105	+105	+104	+104
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
*000	+010	+010	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

310773

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW
D 200	002	356	001	035	002	357	358	001	004	008	002	005
D 80	004	356	358	004	002	351	348	349	350	347	351	346
D 10	003	357	358	003	001	349	345	340	340	338	333	333
F 200	124	144	137	129	124	130	134	137	132	126	118	124
F 160Z0	xxx											
F 120Z0	xxx											
F 80	109	127	110	107	099	095	094	094	082	081	080	088
F 40Z0	xxx											
F 20Z0	xxx											
F 10	069	078	068	068	054	051	051	048	036	034	037	034
F 2	xxx											
T 200	+108	+107	+106	+103	+104	+106	+109	+110	+110	+110	+111	+111
T 160	+112	+111	+109	+106	+108	+110	+111	+112	+112	+112	+113	+113
T 120	+116	+114	+113	+111	+110	+111	+112	+112	+112	+112	+113	+113
T 80	+119	+118	+116	+114	+113	+113	+113	+112	+119	+108	+109	+109
T 40	+123	+122	+120	+118	+115	+114	+113	+111	+116	+102	+104	+105
T 20	+125	+123	+122	+119	+116	+113	+111	+109	+108	+106	+101	+101
T 9	+126	+124	+122	+120	+116	+113	+110	+108	+106	+101	+090	+094
T 2	+126	+123	+122	+120	+115	+110	+107	+103	+102	+094	+088	+089
CT 200	-000	-000	-001	-003	-010	+000	+000	+000	+000	+000	+000	+000
CT 20	+000	+000	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000

011073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	011073
013	008	011	015	011	016	018	025	027	027	031	031	032
357	348	352	354	355	005	007	005	005	011	027	031	043
354	339	339	344	353	355	351	356	003	023	024	037	032
123	114	118	115	116	119	115	100	087	070	053	059	058
xxx												
xxx												
0/5	079	081	078	083	091	084	076	068	044	045	057	060
xxx												
xxx												
028	025	029	027	031	030	026	028	027	034	041	043	045
xxx												
+107	+107	+108	+108	+108	+111	+109	+107	+104	+106	+109	+112	+117
+107	+106	+108	+109	+109	+107	+108	+108	+105	+105	+110	+112	+117
+105	+107	+106	+111	+110	+108	+108	+105	+105	+105	+113	+112	+113
+101	+104	+103	+102	+103	+104	+105	+107	+108	+109	+112	+120	+123
+097	+096	+094	+094	+094	+096	+096	+095	+095	+095	+124	+124	+125
+093	+089	+086	+088	+080	+090	+090	+093	+093	+096	+128	+128	+129
+091	+086	+085										

011073

011073

021073

CABA UW

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-12	02-03
D200	036 039	037 023	027 028	028 023	023 031	037 054	061 061	060 062	060 057	060 062	061 162	065 065
D 80	038 041	037 020	018 021	027 025	019 025	030 037	049 053	051 056	054 064	072 060	058 166	070 075
D 10	035 031	022 019	010 007	015 012	007 017	027 025	024 020	019 015	035 035	013 014	024 032	034
F200	063 058	056 060	055 055	079 088	089 079	077 076	074 069	065 064	064 063	065 061	157 053	050
F160Z0	XXX XXX											
F 80	001 051	043 055	042 065	072 076	076 080	074 062	054 056	055 058	057 059	061 054	154 054	052
F 40Z0	XXX XXX											
F 2JZ0	XXX XXX											
F 10	033 029	022 021	020 019	020 020	021 017	016 016	014 019	019 013	022 015	015 017	014 117	018 016
F 2	XXX XXX											
T200	+128 +127	+127 +122	+122 +122	+121 +122	+123 +123	+122 +122	+121 +120	+119 +119	+119 +118	+117 +116	+116 +115	+115 +113
T160	+152 +131	+130 +126	+125 +125	+124 +125	+125 +126	+124 +124	+122 +124	+121 +121	+119 +118	+117 +116	+118 +117	+117 +114
T120	+136 +134	+133 +129	+128 +128	+127 +127	+125 +127	+125 +125	+121 +118	+125 +123	+122 +122	+119 +118	+118 +119	+119 +115
T 80	+140 +138	+136 +132	+130 +130	+129 +128	+128 +128	+123 +120	+117 +117	+116 +114	+114 +114	+112 +111	+111 +104	+102 +109
T 40	+143 +141	+138 +132	+130 +128	+125 +124	+120 +115	+113 +110	+110 +110	+111 +107	+101 +101	+101 +100	+100 +99	+099 +099
T 20	+144 +142	+138 +131	+124 +117	+114 +111	+106 +106	+101 +099	+098 +097	+099 +094	+094 +094	+090 +083	+083 +078	+078 +074
T 9	+145 +143	+139 +130	+122 +114	+110 +108	+103 +098	+096 +094	+092 +092	+094 +094	+090 +083	+084 +078	+078 +074	+070 +070
T 2	+146 +143	+137 +127	+116 +106	+100 +100	+095 +088	+084 +082	+072 +073	+077 +068	+070 +066	+065 +059	+059 +055	+058 +059
C1200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000

021073

021073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	
055 052	143 037	034 037	036 044	053 051	050 057	048 031	036 039	039 032	033 030	041 042	017 D200	
068 025	047 043	037 039	043 057	048 042	049 064	063 038	037 040	042 035	037 029	047 044	017 D 80	
027 027	007 017	004 047	091 071	050 027	037 045	056 031	033 039	037 037	029 024	042 035	014 D 10	
W50	052 054	050 054	059 060	056 054	053 053	039 039	029 042	042 049	052 049	059 059	064 064	052 F200
XXX XXX	F160Z0											
XXX XXX	F120Z0											
051 053	054 054	054 056	052 051	057 060	046 028	028 040	048 049	048 057	056 060	052 052	046 056	F 80
XXX XXX	F 40Z0											
U18 016	-023 023	018 021	011 011	010 013	027 026	024 023	034 037	043 042	047 036	031 031	043 F 10	
XXX XXX	F ?											
+112 +113	+111 +112	+114 +114	+113 +108	+105 +106	+111 +112	+103 +103	+113 +118	+123 +123	+126 +126	+129 +130	+132 +132	XXX +137 +133 T200
+114 +115	+112 +114	+116 +114	+109 +108	+106 +106	+112 +112	+113 +104	+110 +117	+127 +127	+130 +130	+132 +133	+134 +134	XXX +141 +137 T160
+113 +115	+113 +116	+117 +117	+105 +108	+108 +109	+110 +113	+108 +108	+114 +114	+120 +120	+126 +131	+134 +134	+136 +136	XXX +145 +140 T120
+106 +111	+110 +110	+115 +113	+112 +096	+100 +108	+109 +109	+107 +107	+111 +111	+118 +118	+125 +130	+135 +138	+140 +142	+142 +145 XXX +149 +144 T 80
+092 +074	+090 +095	+086 +077	+069 +069	+082 +082	+088 +088	+098 +098	+107 +107	+115 +115	+122 +134	+139 +143	+145 +146	+147 +149 XXX +153 +148 T 40
+075 +075	+070 +069	+066 +062	+063 +070	+082 +097	+108 +117	+112 +112	+124 +124	+131 +131	+137 +137	+142 +142	+149 +149	+151 +151 XXX +156 +151 T 20
+069 +067	+063 +063	+060 +057	+061 +068	+082 +082	+098 +098	+110 +120	+127 +133	+140 +145	+148 +151	+151 +153	+153 +155	XXX +158 +153 T 9
+055 +053	+047 +047	+046 +046	+049 +049	+062 +079	+094 +094	+113 +123	+130 +138	+144 +144	+148 +152	+155 +155	+154 +157	+157 +158 XXX +161 +157 T 2
-000 +010	+000 +000	-000 -000	-000 +000	+000 +000	-000 -000	-000 +000	-000 -000	-000 +000	-000 -000	-000 +000	-000 -000	CT200
-000 -000	+000 +000	+000 +000	-000 -000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	CT 20

021073

021073

031073

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	
D200	021 021	027 025	025 025	029 029	034 035	035 037	047 061	063 063	058 058	050 043	041 039	041 038	044 045
D 80	015 021	022 020	023 028	031 039	046 051	050 050	065 074	071 067	064 064	154 039	038 043	045 042	040 041
D 10	013 017	018 019	033 027	026 028	037 032	037 037	068 059	041 041	041 026	022 017	032 034	038 035	032 035
F200	067 069	081 082	085 087	079 075	068 066	072 062	062 058	060 059	055 055	058 072	091 072	077 079	071
F160Z0	XXX XXX												
F120Z0	XXX XXX												
F 80	067 063	073 071	069 075	074 060	052 044	047 053	051 045	043 039	035 044	051 043	150 043	048 053	
F 40Z0	XXX XXX												
F 20Z0	XXX XXX												
F 10	041 041	040 034	034 016	021 027	025 018	015 015	012 012	007 008	009 009	014 014	027 027	028 028	029
F 2	XXX XXX												
T200	+125 +124	+125 +125	+125 +125	+123 +123	+123 +123	+121 +121	+120 +120	+119 +118	+118 +118	+119 +119	+120 +120	+124 +125	+125 +124
T160	+127 +126	+128 +128	+128 +128	+126 +125	+124 +124	+124 +124	+124 +124	+123 +121	+119 +118	+118 +118	+121 +121	+124 +124	+125 +126
T120	+130 +129	+131 +132	+130 +131	+129 +129	+127 +126	+126 +125	+125 +125	+129 +127	+125 +125	+122 +122	+124 +124	+126 +126	+127 +127
T 80	+133 +132	+134 +133	+132 +132	+127 +129	+132 +130	+129 +129	+127 +127	+131 +130	+129 +128	+128 +128	+127 +127	+128 +128	+128 +128
T 40	+138 +136	+136 +136	+133 +133	+124 +124	+126 +126	+125 +125	+126 +126	+128 +127	+125 +125	+125 +125	+126 +126	+125 +125	+126 +126
T 20	+140 +138	+137 +132	+132 +122	+119 +119	+126 +122	+125 +125	+123 +122	+120 +124	+124 +124	+124 +124	+125 +125	+126 +126	+127 +128
T 9	+142 +139	+138 +138	+132 +121	+117 +117	+120 +120	+125 +123	+123 +121	+118 +118	+122 +122	+124 +124	+123 +123	+124 +124	+126 +132
T 2	+143 +140	+138 +130	+117 +111	+118 +124	+121 +117	+114 +119	+123 +123	+123 +123	+124 +124	+126 +126	+126 +126	+130 +132	+132 +132
CT200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	
CT 20	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	

031073

031073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15



<tbl\_r cells="12" ix="3" maxcspan="1"

041073

041073

CABA UW

	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
S 00	065	061	067	172	073	074	174	075	076	174	124	125
S 01	076	063	067	171	074	071	175	076	077	175	126	127
S 02	070	054	055	157	055	056	174	056	057	174	092	096
F 000	101	099	105	098	114	120	177	120	121	136	134	129
F 160Z0	xxx											
F 120Z0	xxx											
F 60	066	085	082	074	083	092	088	083	084	071	079	086
F 40Z0	xxx											
F 20Z0	xxx											
F 10	058	050	048	036	040	040	038	041	039	034	027	028
F 2	xx	xxx										
T 001	+147	+145	+143	+142	+140	+139	+135	+131	+129	+126	+125	+124
T 150	+151	+149	+147	+145	+143	+141	+137	+133	+127	+126	+125	+124
T 120	+155	+152	+150	+146	+146	+144	+139	+135	+131	+128	+125	+123
T 40	+158	+156	+153	+151	+148	+145	+139	+135	+131	+127	+125	+123
T 30	+162	+159	+155	+153	+149	+143	+138	+135	+131	+129	+124	+120
T 3	+164	+161	+156	+153	+148	+141	+136	+134	+131	+129	+126	+124
T 2	+165	+161	+157	+153	+148	+141	+136	+134	+131	+128	+126	+123
CT 200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

041073

041073

	04-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
143	145	150	151	148	148	142	146	141	123	115	103	095
102	103	102	100	097	101	099	101	090	093	093	092	098
090	097	070	072	077	070	082	080	082	081	089	100	102
011	047	094	091	083	078	066	061	053	060	068	059	047
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
L 08	071	060	057	058	057	059	062	061	048	039	034	040
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
022	022	016	015	013	017	015	017	021	025	024	023	027
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+141	+147	-141	+133	+134	+130	+135	+134	+131	+132	+126	+126	+122
+125	+127	-122	+115	+118	+119	+121	+125	+123	+126	+124	+120	+121
+114	+115	-111	+110	+109	+110	+112	+117	+120	+123	+112	+115	+123
+106	+107	-102	+101	+100	+099	+099	+101	+102	+105	+108	+116	+126
+103	-111	-099	+098	+095	+094	+093	+094	+097	+103	+100	+119	+130
+102	-108	-098	+096	+093	+092	+090	+093	+096	+104	+112	+121	+133
+101	+079	-097	+095	+091	+090	+088	+089	+097	+105	+114	+124	+135
+099	+026	-093	+090	+092	+080	+088	+097	+106	+115	+125	+137	+144
+000	+000	-000	+000	+000	+000	+000	+000	+000	-000	-000	-000	-000
-000	-000	-000	+000	+000	+000	+000	+000	+000	-000	-000	-000	-000

041073

041073

051073

CABA UW

	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	063	080	084	082	087	098	102	103	109	113	120	125
D 80	067	082	077	076	077	090	092	096	097	100	098	097
D 10	090	082	079	068	081	101	090	092	094	090	088	091
F 200	062	063	070	077	078	080	078	084	088	082	092	090
F 160Z0	xxx	yyy	xxx									
F 120Z0	xxx											
F 60	045	051	060	070	073	065	064	080	084	065	080	081
F 40Z0	xxx											
F 20Z0	xxx											
F 10	021	021	025	029	025	019	014	018	023	026	023	020
F 2	xxx											
T 200	+171	+169	+165	+162	+162	+161	+161	+166	+168	+169	+170	+172
T 160	+174	+173	+167	+164	+164	+162	+162	+161	+167	+169	+170	+171
T 120	+177	+176	+170	+166	+165	+163	+164	+162	+166	+163	+169	+173
T 80	+180	+178	+172	+168	+163	+160	+161	+157	+150	+148	+147	+147
T 40	+182	+180	+173	+167	+161	+155	+147	+149	+148	+143	+137	+139
T 20	+183	+180	+173	+165	+159	+152	+147	+145	+143	+139	+135	+132
T 9	+185	+181	+172	+163	+157	+150	+144	+142	+137	+133	+130	+126
T 2	+183	+178	+169	+157	+152	+143	+135	+133	+136	+132	+129	+125
CT 200	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

051073

051073

	04-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
284	291	332	029	065	076	090	095	107	120	129	144	142
229	198	128	105	131	147	158	168	166	179	167	143	129
084	113	110	106	130	150	154	159	158	152	154	120	121
025	013	008	009	011	018	028	037	038	045	054	066	070
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
010	010	011	017	041	043	041	041	045	043	038	035	041
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
009	014	014	017	021	019	023	021	025	028	023	018	020
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+171	+171	+170	+168	+165	+161	+159	+159	+161	+160	+157	+159	+162
+172	+173	+172	+169	+163	+155	+156	+158	+153	+157	+154	+154	+161
+168	+170	+171	+165	+147	+147	+145	+143	+149	+150	+154	+154	+161
+140	+143	+140	+140	+127	+127	+134	+136	+133	+139	+132	+125	+139
+119	+118	+114	+104	+097	+107	+112	+109	+101	+103	+112	+123	+136
+090	+086	+084	+083	+082	+084	+086	+089	+093	+114	+125	+138	+153
+081	+082	+083	+082	+077	+079	+093	+088	+095	+107	+123	+140	+156
+063	+074	+078	+076	+075	+069	+070	+079	+089	+098	+110	+120	+140
+000	+010	-001	+001	+000	-000	-000	-000	-000	-000	-000	-000	-000
-000	+001	+001	-001	+000	+000	+000	+000	+000	+000	-000	-000	-000

041073

CABA UW

251073

2513

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 00	124	128	130	136	145	149	139	139	152	160	164	160
D 01	115	116	121	123	123	115	120	125	136	138	143	141
D 10	109	102	104	104	098	096	099	109	109	112	112	090
F 200	044	050	054	053	046	044	050	050	057	047	043	037
F160Z0	xxx											
F120Z0	xxx											
F 80	031	041	048	051	045	049	054	052	049	051	048	046
F 40Z0	xxx											
F 20Z0	xxx											
F 10	015	016	014	018	017	018	018	025	019	013	011	012
F 2	xxx											
T 200	+194	+198	+203	+205	+208	+206	+205	+205	+207	+205	+205	+204
T 160	+197	+201	+206	+208	+211	+206	+205	+207	+205	+204	+205	+204
T 120	+200	+203	+210	+211	+211	+205	+205	+208	+205	+204	+206	+204
T 80	+203	+205	+208	+210	+208	+205	+206	+208	+205	+203	+204	+199
T 40	+205	+205	+206	+206	+205	+205	+202	+199	+195	+190	+191	+187
T 20	+205	+203	+202	+198	+194	+191	+188	+183	+178	+174	+175	+170
T 9	+206	+203	+199	+195	+190	+186	+182	+178	+173	+166	+163	+156
T 2	+203	+197	+191	+178	+167	+165	+157	+164	+153	+134	+132	+122
CT200	-000	-000	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000
CT 2	-000	-000	-000	-000	-000	-000	-000	+000	+000	+000	+000	+000

001073

661-77

011073

071073

071073

081073

CABA UW

WMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	242	238	241	246	251	261	276	304	346	348	359	016
D 80	249	235	235	242	246	250	259	279	340	351	355	004
D 10	275	230	234	241	250	255	266	276	336	336	346	012
F200	045	053	067	072	069	055	053	047	045	045	046	044
F160Z0	xxx											
F120Z0	xxx											
F 80	033	034	045	043	043	044	044	034	035	035	030	022
F 40Z0	xxx											
F 20Z0	xxx											
F 10	014	016	026	022	021	021	018	016	012	015	013	007
F 2	xxx											
+129	+128	+123	+126	+129	+130	+131	+128	+128	+127	+124	+125	+124
+128	+127	+124	+128	+132	+133	+134	+131	+130	+129	+128	+124	+127
+129	+130	+124	+128	+134	+136	+136	+134	+133	+131	+130	+129	+127
+130	+132	+133	+132	+133	+137	+138	+137	+137	+133	+133	+131	+130
+130	+138	+139	+134	+135	+139	+141	+140	+138	+137	+136	+135	+134
+140	+141	+136	+137	+141	+142	+140	+139	+137	+136	+134	+132	+130
+140	+141	+136	+137	+141	+142	+140	+139	+137	+136	+134	+132	+130
+137	+137	+131	+131	+136	+139	+140	+139	+137	+136	+134	+130	+128
+138	+138	+131	+132	+136	+135	+135	+134	+133	+131	+131	+122	+123
* 2	*	*	*	*	*	*	*	*	*	*	*	*
CT200	+003	+002	-001	+001	+003	+001	-000	-000	-000	-000	-000	-000
CT 20	+003	-004	-001	-004	-000	-000	-000	-000	-000	-000	-000	-000

081073

081073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
302	311	316	313	310	328	352	005	024	021	017	094
284	294	306	306	314	359	027	030	004	032	360	132
273	288	288	308	347	018	323	246	297	255	180	200
039	044	044	038	039	024	023	020	015	013	007	004
xxx											
xxx											
031	036	037	043	037	035	032	026	018	013	007	008
xxx											
xxx											
021	015	017	013	013	014	009	004	009	003	007	008
xxx											
+128	+128	+123	+127	+124	+123	+121	+122	+123	+123	+125	+125
+129	+129	+131	+132	+131	+126	+125	+123	+126	+126	+125	+125
+133	+132	+134	+134	+128	+127	+128	+126	+128	+129	+127	+128
+135	+134	+134	+135	+136	+129	+130	+130	+126	+127	+128	+129
+136	+133	+131	+132	+135	+135	+130	+130	+128	+129	+130	+131
+136	+131	+129	+129	+130	+127	+127	+125	+126	+127	+128	+129
+137	+131	+129	+129	+130	+127	+127	+125	+126	+127	+128	+129
+128	+129	+128	+127	+128	+126	+126	+126	+130	+131	+133	+134
+125	+126	+125	+125	+124	+123	+123	+126	+130	+131	+133	+134
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

081073

081073

091073

CABA UW

WMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
0200	274	270	274	272	263	245	239	239	236	236	232	234
D 80	277	274	269	274	252	232	230	228	225	224	222	220
D 10	277	275	257	272	243	216	221	225	221	213	218	211
F200	029	033	045	059	052	047	044	064	081	091	082	092
F160Z0	xxx											
F120Z0	xxx											
F 80	024	034	035	046	040	039	049	061	063	066	066	064
F 40Z0	xxx											
F 20Z0	xxx											
F 10	018	019	018	022	023	020	024	030	030	034	035	029
F 2	xxx											
T200	+130	+130	+130	+129	+128	+127	+127	+127	+128	+128	+125	+123
T160	+129	+134	+133	+132	+131	+131	+130	+129	+130	+131	+134	+135
T120	+138	+138	+137	+136	+134	+133	+132	+132	+131	+131	+138	+139
T 80	+141	+141	+140	+139	+137	+135	+134	+133	+132	+132	+143	+143
T 40	+145	+144	+142	+141	+139	+137	+135	+133	+132	+134	+143	+143
T 20	+146	+145	+143	+141	+139	+138	+134	+133	+132	+132	+142	+142
T 9	+147	+145	+142	+142	+138	+135	+134	+132	+131	+131	+145	+145
T 2	+147	+143	+140	+139	+135	+132	+132	+131	+130	+132	+142	+142
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

091073

091073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
227	232	273	231	232	231	231	230	230	228	232	234
220	226	224	221	225	223	224	223	221	225	230	238
225	232	225	228	227	230	230	228	230	234	234	249
122	120	123	127	131	157	130	134	140	140	136	145
xxx											
xxx											
U92	091	094	088	097	101	101	106	113	115	121	117
xxx											
xxx											
063	067	062	057	062	063	071	079	085	087	097	089
xxx											
*119	*119	*119	*118	*118	*117	*116	*118	*121	*123	*125	*124
*122	*121	*121	*121	*120	*119	*119	*120	*123	*127	*128	*132
*125	*125	*124	*123	*121	*122	*123	*127	*130	*132	*134	*134
*128	*128	*125	*126	*124	*125	*126	*130	*134	*136	*135	*135
*131	*131	*129	*127	*127	*126	*128	*130	*134	*138	*140	*140
*132	*132	*129	*128	*129	*127	*129	*132	*136	*140	*142	*142
*132	*132	*129	*128	*129	*127	*127	*130	*134	*138	*142	*142
*132	*132	*129	*128	*127	*127	*127	*130	*134	*138	*142	*142
*132	*131	*127	*127	*128	*125	*125	*130	*133	*138	*143	*143
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

091073

091073

03-04	04-05</th

091073

GMT	12-16		16-17		17-18		18-19		19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03		
	0200	247	243	253	317	330	327	320	317	302	285	271	267	270	270	263	261	263	255	252	250	264	274	277	277
D 80	244	244	248	321	333	331	323	320	302	266	242	235	243	254	251	239	249	240	235	223	231	241	256	248	
D 10	247	244	252	323	334	335	326	321	295	244	229	228	230	247	251	234	249	241	235	213	219	225	253	237	
F 200	118	130	122	101	091	091	076	066	065	055	068	067	062	068	067	065	055	045	053	044	059	061	067	045	
F 160Z0	xxx	xxx																							
F 120Z0	xxx	xxx																							
F 80	193	105	095	089	078	070	054	043	031	030	041	048	045	055	050	049	049	040	042	040	041	041	045	037	
F 40Z0	xxx	xxx																							
F 20Z0	xxx	xxx																							
F 10	058	080	068	053	053	045	036	023	023	017	016	026	029	027	032	032	031	035	027	028	023	024	026	024	
F 2	xxx	xxx																							
T 200	*137	*138	*139	*113	*100	*091	*091	*090	*092	*090	*092	*091	*091	*091	*092	*093	*088	*088	*090	*090	*094	*095	*095	*094	
T 160	*140	*141	*142	*115	*103	*093	*092	*093	*094	*094	*095	*096	*095	*096	*093	*094	*096	*092	*092	*092	*095	*097	*097	*095	
T 120	*144	*145	*146	*118	*105	*096	*095	*095	*096	*098	*098	*095	*093	*097	*099	*096	*094	*094	*095	*096	*099	*100	*099	*099	
T 80	*147	*148	*149	*120	*107	*099	*097	*098	*098	*099	*100	*100	*099	*099	*101	*100	*097	*096	*098	*099	*101	*102	*102	*102	
T 40	*151	*151	*152	*123	*110	*101	*100	*100	*102	*103	*103	*102	*101	*100	*102	*102	*101	*101	*101	*101	*101	*103	*104	*105	
T 20	*152	*152	*153	*125	*112	*103	*102	*104	*104	*103	*106	*104	*103	*105	*104	*102	*100	*102	*102	*104	*105	*107			
T 9	*152	*152	*152	*125	*112	*103	*101	*102	*102	*103	*103	*108	*107	*105	*104	*104	*103	*101	*102	*103	*105	*107	*107		
T 2	*152	*151	*151	*125	*113	*104	*102	*103	*103	*104	*104	*104	*103	*106	*105	*103	*101	*103	*104	*106	*107	*107	*107		
CT 200	-000	-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
CT 20	+000	+003	+000	+001	+000	-002	-005	-000	+001	+000	+000	+003	+002	-001	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	

101073

03-04	04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15				
	0271	277	278	262	246	205	195	210	241	241	237	238	235	231	233	230	226	228	225	226	227	228	230	D 200	
0271	277	278	262	246	205	195	210	241	241	237	238	235	231	233	230	226	228	225	226	227	228	230	D 200		
0266	238	232	216	203	192	174	183	235	237	234	232	230	227	230	228	223	227	221	223	224	224	225	D 80		
0268	225	206	189	180	179	164	170	236	242	238	236	236	232	233	230	233	227	230	229	230	231	D 10			
049	047	042	032	032	036	046	064	120	128	127	120	118	123	125	118	126	124	116	117	125	120	118	F 200		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0		
034	031	032	031	032	035	042	081	099	104	103	097	100	108	105	111	113	104	109	112	111	100	094	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0		
021	016	020	020	018	020	020	023	056	072	084	088	079	086	091	094	090	086	092	086	086	074	070	F 10		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2		
*097	*099	*100	*101	*103	*102	*103	*108	*117	*114	*122	*124	*121	*121	*122	*121	*119	*121	*121	*120	*120	*119	*121	*121	T 200	
*098	*100	*102	*102	*103	*103	*104	*108	*118	*115	*126	*127	*124	*124	*129	*126	*125	*125	*125	*125	*126	*125	*126	*124	T 160	
*099	*101	*103	*103	*104	*106	*106	*109	*120	*123	*130	*131	*128	*127	*129	*130	*128	*129	*129	*129	*127	*127	*127	*128	T 120	
*102	*103	*104	*105	*105	*106	*107	*110	*110	*122	*122	*134	*135	*132	*131	*135	*133	*133	*133	*131	*131	*131	*130	*131	T 80	
*104	*105	*106	*107	*107	*108	*108	*109	*111	*123	*123	*138	*139	*135	*134	*137	*139	*137	*137	*135	*138	*135	*134	*134	T 40	
*107	*108	*108	*108	*109	*109	*110	*112	*124	*124	*123	*138	*141	*137	*136	*139	*141	*140	*139	*137	*137	*137	*136	*136	T 20	
*106	*107	*107	*108	*108	*109	*109	*110	*112	*124	*124	*141	*142	*137	*137	*140	*140	*141	*141	*141	*142	*139	*142	*138	T 9	
*108	*108	*108	*108	*109	*109	*110	*111	*113	*125	*125	*141	*143	*137	*137	*141	*146	*144	*144	*143	*143	*137	*136	*136	T 2	
*000	-000	-000	-000	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 200	
*002	+001	+001	+000	+000	+000	+000	+000	-007	-003	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20	

111073

03-04	04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15	
	048	049	048	051	050	050	051	055	063	066	063	057	051	062	050	054	036	042	019			

111-73

111073

121073

CABA UW

	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D 200	002	352	312	314	311	320	306	294	290	317	316	326	343	346	349	346	006	047	094	084	073	076	082	083	
D 80	018	023	344	315	303	300	280	265	282	304	303	300	331	341	327	325	335	360	060	060	065	075	080	084	
D 10	015	002	294	265	251	261	230	221	253	300	277	282	300	307	277	266	264	127	152	331	048	056	056	056	064
F 200	032	045	038	030	036	048	035	031	042	061	042	052	048	060	059	064	064	050	044	042	047	070	080	079	
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	059	037	015	025	027	032	036	038	052	054	039	046	045	046	045	052	052	038	025	033	056	074	070	071	
F 40Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 20Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	010	019	006	010	013	012	016	018	019	023	021	023	021	016	015	017	012	008	004	012	029	024	019	021	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
C 200	+075	+076	+078	+077	+078	+078	+078	+077	+076	+078	+076	+078	+068	+062	+058	+058	+056	+064	+057	+050	+043	+041	+049		
C 160	+077	+077	+080	+080	+080	+080	+080	+080	+079	+078	+075	+071	+065	+061	+059	+058	+054	+062	+058	+047	+037	+043	+051		
C 120	+050	+079	+088	+082	+083	+083	+083	+083	+081	+081	+078	+075	+069	+063	+061	+060	+054	+058	+053	+039	+035	+046	+051		
C 80	+013	+011	+081	+086	+085	+084	+085	+085	+083	+084	+082	+079	+078	+072	+065	+061	+059	+055	+052	+046	+029	+036	+037	+038	
C 40	+016	+082	+081	+082	+083	+084	+083	+081	+077	+080	+079	+079	+073	+062	+054	+051	+047	+046	+043	+021	+021	+027	+030		
C 20	+013	+082	+081	+060	+078	+076	+075	+074	+069	+071	+071	+066	+068	+066	+057	+051	+046	+042	+044	+038	+016	+017	+021	+025	
C 9	+020	+082	+080	+078	+071	+065	+060	+058	+059	+065	+063	+060	+059	+056	+051	+046	+040	+039	+040	+030	+015	+016	+018	+022	
C 2	+012	+081	+077	+066	+051	+051	+041	+041	+053	+042	+043	+038	+031	+024	+022	+025	+024	+014	+011	+011	+012	+013	+013	+016	
C 200	-010	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		
C 20	-010	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000		

121073

121073

	04-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15											
D 02	01	093	101	100	105	110	108	111	123	127	119	116	117	114	116	115	115	115	110	111	D 200		
D 01	048	101	103	100	105	098	091	094	098	109	114	118	112	112	118	118	118	110	117	D 80			
D 06	076	036	077	086	043	052	087	096	096	096	096	096	096	096	096	096	096	096	096	096	D 17		
U 75	006	7	7	071	070	069	076	075	072	071	073	071	060	046	046	046	051	051	057	063	F 200		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
U 05	070	070	074	070	076	060	055	050	030	037	034	030	035	037	032	041	045	053	063	F 80			
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
U 21	014	026	021	022	021	021	018	017	019	018	028	033	037	032	036	033	032	039	037	047	F 200		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
+043	+049	+013	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050
+047	+050	+014	+052	+052	+053	+053	+053	+053	+051	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050	+050
+041	+046	+014	+050	+050	+051	+051	+052	+052	+042	+024	+022	+020	+021	+029	+033	+040	+049	+060	xxx	xxx	xxx	xxx	xxx
+031	+034	+014	+038	+038	+037	+037	+037	+027	+025	+021	+019	+023	+023	+032	+036	+043	+057	+067	xxx	xxx	xxx	xxx	xxx
+025	+026	+011	+029	+028	+033	+028	+027	+027	+028	+024	+024	+026	+036	+041	+050	+062	+071	xxx	xxx	xxx	xxx	xxx	xxx
+022	+023	+022	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	
+019	+021	+026	+026	+023	+023	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026
+012	+014	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026
+010	+012	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026	+026
+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003	+003
+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002	+002

	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	117	103	101	099	095	096	097	101	102	104	105	110	114	121	131	135	133	134	130	124	122	121	118	115
D 80	120	119	114	112	108	106	101	094	092	092	092	093	099	108	116	116	116	109	102	099	100	098	097	
D 10	126	125	124	126	120	123	103	056	089	084	076	081	089	096	100	099	094	089	088	093	101	095	094	
F 200	064	063	072	075	068	069	075	086	101	114	116	123	131	126	114	118	123	121	116	123	124	112	108	
F 160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
F 120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
F 80	039	055	045	044	041	044	051	059	079	081	075	084	082	080	072	066	068	071	072	075	073	069	068	
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
F 10	040	040	029	029	023	013	014	015	019	025	028	026	030	030	030	033	031	026	025	029	028	028	028	
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX												
T 200	+054	+052	+052	+053	+054	+054	+055	+055	+055	+053	+053	+053	+053	+053	+053	+053	+054	+054	+054	+054	+054	+054	+054	
T 160	+053	+052	+053	+053	+054	+054	+055	+055	+055	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	+054	
T 120	+062	+062	+055	+055	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	+056	
T 40	+070	+066	+059	+059	+053	+053	+052	+051	+049	+047	+045	+042	+0											

131073

13:073

141073

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	098	085	045	090	090	090	092	091	100	104	108	110
D 80	096	079	076	078	078	077	078	077	079	082	082	077
D 10	098	077	049	066	063	056	060	057	055	057	060	054
F200	052	056	067	070	079	087	088	093	099	097	092	078
F160Z0	xxx											
F120Z0	xxx											
F 80	044	042	047	046	054	059	065	066	072	073	070	067
F 40ZU	xxx											
F 20Z0	xxx											
F 10	027	022	020	016	016	019	020	021	026	025	022	021
F 2	xxx											
T200	+060	+058	+058	+058	+058	+057	+055	+054	+053	+055	+058	+062
T160	+064	+062	+061	+061	+061	+060	+058	+056	+059	+059	+061	+064
T120	+067	+065	+064	+064	+064	+063	+062	+060	+058	+056	+054	+054
T 80	+071	+068	+067	+065	+065	+064	+063	+060	+057	+054	+052	+050
T 40	+074	+072	+069	+067	+064	+062	+059	+057	+053	+049	+048	+046
T 20	+076	+073	+069	+066	+062	+059	+054	+053	+049	+045	+045	+041
T 9	+077	+073	+069	+065	+059	+056	+052	+050	+047	+043	+042	+039
T 2	+076	+072	+066	+060	+053	+048	+042	+040	+037	+035	+031	+029
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000

141073

141073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
083	080	094	097	093	092	092	091	104	109	110	102
073	067	072	075	076	075	076	086	090	080	071	058
035	039	044	049	052	049	050	077	082	066	056	041
055	055	055	059	063	067	065	069	068	064	062	059
xxx											
xxx											
057	057	051	052	053	050	046	049	038	028	027	027
xx1											
xx1											
xx1											
xx1											
xx1											
+058	+055	+053	+053	+055	+055	+054	+056	+054	+058	+064	+060
+056	+055	+054	+054	+056	+055	+056	+057	+055	+062	+063	+063
+050	+043	+042	+036	+040	+047	+055	+056	+036	+038	+044	+046
+026	+029	+024	+023	+022	+021	+024	+026	+025	+031	+041	+045
+018	+018	+013	+019	+018	+019	+020	+023	+027	+033	+038	+044
+015	+017	+017	+018	+019	+020	+021	+024	+028	+035	+040	+047
+015	+016	+017	+018	+019	+021	+022	+025	+029	+036	+042	+046
+014	+015	+016	+017	+019	+021	+022	+025	+030	+038	+044	+051
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

141073

141073

141073

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	074	068	064	080	082	084	072	078	085	087	094	098
D 80	075	069	064	075	074	072	057	058	072	067	070	068
D 10	071	061	056	065	061	054	037	043	058	052	047	048
F200	047	043	044	044	045	042	052	055	052	058	049	045
F160Z0	xxx											
F120Z0	xxx											
F 80	042	040	039	034	036	041	050	048	039	043	036	040
F 40ZU	xxx											
F 20Z0	xxx											
F 10	031	030	023	027	017	015	017	024	017	019	016	021
F 2	xxx											
T200	+070	+071	+071	+069	+068	+067	+068	+072	+069	+068	+062	+063
T160	+074	+075	+074	+073	+071	+070	+069	+070	+069	+067	+066	+070
T120	+078	+079	+078	+076	+074	+073	+072	+070	+069	+067	+066	+079
T 80	+082	+083	+082	+080	+078	+076	+074	+073	+072	+070	+068	+074
T 40	+086	+087	+085	+083	+081	+077	+075	+074	+073	+070	+069	+087
T 20	+088	+087	+084	+081	+078	+076	+075	+075	+074	+072	+070	+080
T 9	+089	+090	+087	+084	+081	+078	+076	+075	+075	+074	+071	+072
T 2	+090	+091	+086	+083	+078	+076	+075	+075	+075	+074	+071	+073
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	+000	-000	+000	-000	+000	+000	+000	+000	+000	+000	+000

151073

151073

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	074	068	064	080	082	084	072	078	085	087	094	098
D 80	075	069	064	075	074	072	057	058	072	067	070	068
D 10	071	061	056	065	061	054	037	043	058	052	047	048
F200	044	043	040	044	045	042	052	055	052	058	049	045
F160Z0	xxx											
F120Z0	xxx											
F 80	037	033	040	052	046	053	050	045	032	026	022	023
F 40ZU	xxx											
F 20Z0	xxx											
F 10	021	020	025	027	028	024	023	019	020	023	024	022
F 2	xxx											
+078	+081	+072	+063	+068	+065	+068	+060	+062	+061	+063	+068	+071
+075	+076	+065	+064	+065	+063	+060	+061	+063	+063	+066	+071	+075
+067	+065	+064	+066	+065	+063	+064	+065	+066	+067	+070	+073	+065
+067	+066	+067	+066	+067	+066	+068	+068	+070	+071	+074	+078	+079
+070	+069	+070	+071	+073	+072	+073	+074	+075	+078	+083	+087	+093
+072	+071	+071	+072	+075	+074	+074	+075	+076	+080	+085	+090	+095
+073	+072	+072	+073	+071	+070	+071	+072	+073	+077	+082	+086	+091
+073	+072	+072	+073	+071	+070	+071	+072	+073	+077	+089	+094	+096
*	*	*	*	*	*	*	*	*	*	*	*	*
-000	-000	-000	-003	-006	-007	-005	-000	-001	-000	-000	-001	-000
+000	+000	+000	-000	+000	+000	+000	-000	+000	+000	-000	-001	-001

151073

CABA UW

151073

151073

161073

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	256	248	248	253	248	251	260	260	255	233	217	228
D 80	255	240	237	238	253	234	238	237	231	221	212	219
D 10	258	242	240	235	230	225	223	215	203	198	207	216
F200	058	058	064	058	057	046	047	038	031	029	044	054
F160Z0	xxx											
F120Z0	xxx											
F 80	044	046	051	044	048	044	040	036	034	034	055	039
F 40Z0	xxx											
F 20Z0	xxx											
F 10	029	029	029	024	031	025	022	019	021	019	026	015
F 2	xxx											
T200	+093	+094	+095	+021	+092	+098	+096	+098	+101	+098	+095	+094
T160	+096	+097	+096	+088	+088	+091	+090	+094	+103	+101	+096	+094
T120	+100	+100	+098	+091	+091	+093	+093	+093	+102	+102	+097	+099
T 80	+103	+103	+102	+100	+097	+096	+096	+098	+097	+097	+098	+095
T 40	+107	+106	+105	+103	+100	+102	+111	+102	+102	+099	+097	+098
T 20	+108	+107	+105	+103	+101	+102	+112	+102	+103	+100	+097	+098
T 9	+109	+107	+105	+103	+101	+103	+112	+102	+103	+100	+098	+099
T 2	+109	+106	+104	+101	+101	+103	+102	+101	+102	+099	+097	+098
C1200	-000	-000	-000	+005	+016	+013	+013	+014	+005	+003	-000	-000
C 20	+000	+000	+001	-000	+004	+006	+007	+007	+007	+005	+001	+002
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	+001	-000	+004	+006	+007	+007	+007	+005	+001	+002

161073

161073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
095	110	104	103	106	100	104	101	097	083	082	077
114	126	125	082	080	075	079	078	075	062	065	059
133	122	135	120	068	061	078	076	075	059	043	053
033	036	042	050	057	055	072	072	069	074	075	075
xxx											
xxx											
031	034	035	032	038	047	048	054	060	061	055	052
xxx											
xxx											
029	022	018	021	025	025	033	034	033	029	025	030
xxx											
*082	+036	+090	+089	+090	+089	+051	+082	+081	+084	+088	+083
+085	+037	+090	+089	+090	+080	+083	+084	+086	+082	+083	+083
+087	+038	+092	+088	+086	+074	+078	+079	+082	+084	+086	+086
+088	+034	+086	+075	+073	+076	+079	+080	+080	+084	+085	+085
+078	+075	+072	+074	+074	+077	+081	+081	+082	+082	+085	+087
+080	+076	+074	+075	+078	+062	+033	+063	+063	+065	+067	+069
+080	+076	+074	+076	+075	+078	+062	+033	+063	+065	+067	+069
+080	+076	+074	+076	+075	+078	+062	+033	+063	+065	+067	+069
+080	+077	+074	+075	+078	+079	+062	+033	+063	+065	+067	+069
-000	+001	+000	-100	-000	-000	-002	-000	-000	-000	-000	-000
+000	+000	+001	+100	+000	+000	+000	+000	+000	+000	+000	+000
CT200	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000

161073

161073

171073

CABAUV

GMT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	041	038	033	033	030	027	026	023	016	014	019	025
D Hu	031	029	023	026	025	021	020	017	016	014	021	027
D 10	023	023	016	020	018	015	014	013	010	018	023	027
F200	056	062	066	068	070	072	074	079	087	095	115	123
F160Z0	xxx											
F120Z0	xxx											
F 80	149	056	061	067	064	065	069	072	079	076	094	095
F 40Z0	xxx											
F 20Z0	xxx											
F 10	029	032	036	039	039	041	043	042	050	064	068	058
F 2	xxx											
T200	+085	+082	+080	+076	+073	+069	+066	+063	+062	+059	+054	+046
T160	+088	+085	+081	+078	+075	+071	+068	+065	+064	+062	+057	+049
T120	+090	+087	+083	+077	+074	+070	+068	+067	+064	+061	+059	+045
T 80	+093	+089	+085	+082	+079	+076	+073	+070	+069	+067	+065	+055
T 40	+097	+093	+088	+084	+082	+078	+075	+073	+072	+069	+065	+057
T 20	+099	+097	+091	+088	+085	+085	+083	+079	+075	+075	+075	+075
T 9	+100	+094	+090	+089	+083	+083	+083	+084	+084	+085	+087	+089
T 2	+101	+098	+092	+087	+084	+084	+081	+078	+075	+074	+072	+068
CT200	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

171073

171073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
341	314	294	276	282	272	276	270	257	272	273	232
330	313	299	279	244	250	296	236	239	249	227	223
298	278	247	255	244	216	232	223	237	253	238	228
032	038	031	041	033	035	036	066	051	076	035	070
xxx											
xxx											
037	041	135	042	047	045	063	073	043	072	037	060
xxx											
xxx											
016	026	115	022	024	015	023	038	051	047	024	048
xxx											
*046	+048	+052	+055	+063	+065	+061	+063	+063	+064	+061	+065
+049	+051	+053	+056	+061	+065	+064	+064	+064	+065	+064	+065
+051	+054	+056	+057	+060	+064	+060	+061	+062	+064	+064	+065
+052	+055	+056	+058	+059	+060	+058	+057	+060	+061	+064	+066
+050	+049	+047	+049	+049	+051	+051	+058	+064	+065	+063	+064
+041	+059	+034	+036	+037	+038	+045	+048	+059	+067	+062	+065
+036	+035	+027	+029	+029	+031	+038	+047	+059	+064	+058	+066
+020	+017	+015	+014	+021	+022	+029	+046	+059	+060	+058	+067
*	*	*	*	*	*	*	*	*	*	*	*
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
-000	+000	+000	+000	+000							

171073

171073

181073

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	301	297	274	284	302	297	276	303	276	302	283	306	294	287	248	256	283	292	278	262	267	270	271	273
D 80	302	298	274	276	300	297	261	299	267	282	278	299	286	275	214	225	266	281	276	254	253	259	259	262
D 10	305	300	277	277	290	294	258	297	268	280	279	286	268	268	200	227	242	268	253	233	243	250	264	255
F 200	144	112	138	108	090	080	099	125	125	080	130	104	089	081	077	088	103	100	082	115	134	134	129	141
F 160Z0	XXX	XXX																						
F 120Z0	XXX	XXX																						
F 80	123	091	118	090	077	062	074	102	107	073	114	076	058	063	067	070	071	087	058	078	095	106	096	101
F 40Z0	XXX	XXX																						
F 20Z0	XXX	XXX																						
F 10	067	062	046	058	047	036	047	065	072	042	077	051	032	044	041	032	034	042	037	036	044	049	043	051
F 2	XXX	XXX																						
T 200	+047	+045	+028	+025	+025	+029	+039	+037	+041	+025	+040	+046	+045	+044	+041	+050	+053	+054	+052	+052	+052	+052	+052	
T 160	+050	+051	+031	+027	+027	+027	+031	+036	+038	+044	+027	+014	+022	+041	+046	+047	+047	+042	+051	+055	+056	+054	+053	
T 120	+054	+055	+034	+029	+037	+029	+031	+041	+040	+046	+030	+016	+023	+043	+046	+048	+049	+051	+043	+053	+055	+056	+054	
T 80	+057	+058	+037	+032	+034	+032	+031	+030	+033	+046	+032	+018	+027	+044	+045	+046	+049	+053	+044	+052	+052	+055	+051	+052
T 40	+060	+061	+040	+035	+040	+034	+039	+030	+046	+035	+020	+018	+038	+035	+036	+046	+049	+041	+046	+049	+048	+045	+049	
T 20	+060	+062	+042	+036	+034	+033	+037	+033	+028	+041	+036	+022	+019	+034	+030	+032	+041	+043	+037	+038	+044	+044	+042	+046
T 2	+062	+062	+042	+037	+028	+019	+035	+030	+028	+036	+037	+022	+019	+023	+021	+027	+036	+039	+032	+029	+037	+038	+039	+042
T 2	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
CT 200	-0.00	-0.00	-0.00	-0.14	-0.13	-0.18	-0.12	-0.02	-0.00	+0.00	-0.01	+0.00	-0.06	+0.05	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	
CT 20	-0.02	-0.00	-0.00	-0.00	-0.05	-0.15	-0.02	-0.02	-0.03	-0.05	-0.00	-0.10	-0.12	-0.00	*000	+0.00	-0.00	-0.00	+0.00	+0.00	+0.00	+0.00	+0.00	

181073

181073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15															
272	275	278	274	275	271	271	298	281	291	290	286	287	295	295	293	291	289	xxx	xxx	279	271	276	279	D 200		
283	268	272	266	266	261	261	302	279	273	281	283	283	290	290	286	293	288	xxx	xxx	269	265	272	278	D 80		
288	252	270	261	261	255	258	305	280	261	276	283	283	291	291	287	295	290	xxx	xxx	269	266	272	283	D 10		
152	154	148	143	150	149	149	146	101	116	132	135	159	138	105	113	138	138	xxx	xxx	115	116	131	129	F 200		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 160Z0													
100	103	107	108	103	108	107	108	107	116	122	093	094	109	116	128	108	083	099	123	XXX	XXX	084	098	109	112	F 80
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 40Z0													
052	055	053	056	056	061	064	078	080	053	069	082	087	092	079	071	076	092	092	092	061	070	075	081	F 10		
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 2													
+051	+051	+051	+050	+049	+048	+049	+018	+015	+017	+034	+037	+042	+040	+039	+048	+054	+060	XXX	XXX	+036	+047	+050	+064	T 200		
+052	+052	+052	+051	+050	+050	+050	+021	+017	+020	+039	+041	+045	+042	+042	+051	+057	+064	XXX	XXX	+041	+051	+053	+067	T 160		
+050	+052	+053	+053	+053	+052	+052	+024	+019	+027	+042	+044	+049	+044	+045	+055	+060	+067	XXX	XXX	+047	+053	+056	+071	T 120		
+047	+048	+049	+049	+048	+050	+051	+024	+020	+025	+045	+048	+052	+047	+048	+060	+063	+071	XXX	XXX	+044	+057	+051	+074	T 80		
+045	+046	+047	+047	+047	+048	+048	+028	+022	+025	+042	+053	+058	+052	+054	+067	+075	XXX	XXX	+047	+061	+055	+078	T 40			
+042	+043	+044	+045	+045	+046	+049	+026	+022	+025	+044	+054	+058	+053	+055	+068	+070	+078	XXX	XXX	+043	+063	+060	+080	T 20		
+035	+037	+038	+039	+040	+045	+057	+027	+021	+026	+049	+054	+059	+054	+057	+073	+071	+080	XXX	XXX	+051	+065	+057	+081	T 2		
+000	+010	+000	+000	+000	+000	+000	-011	-012	-017	-004	+000	+000	+000	+000	+000	+000	+000	XXX	XXX	-015	-006	-012	-002	CT 200		
+000	+030	+000	+000	+000	+000	+000	+001	+000	-003	-007	-000	+000	-000	-000	-000	-000	-000	XXX	XXX	-011	+000	-000	-000	CT 20		

181073	191073	191073	CABA UW
03-04	12-16	16-17	17-18
D 200	276	277	276
D 80	274	271	269
D 10	275	270	267
F 200	120	119	109
F 160Z0	XXX	XXX	XXX
F 120Z0	XXX	XXX	XXX
F 80	197	095	088
F 40Z0	XXX	XXX	XXX
F 20Z0	XXX	XXX	XXX
F 10	071	057	046
F 2	XXX	XXX	XXX
T 200	+065	+065	+065
T 160	+068	+068	+070
T 120	+072	+071	+072
T 80	+075	+074	+073
T 40	+078	+075	+071
T 20	+079	+075	+069
T 2	+078	+071	+061
CT 200	-0.00	-0.00	+0.00
CT 20	-0.00	-0.00	-0.00

191073	191073	191073	CABA UW
03-04	04-05	05-06	06-07
223	223	223	227
214	214	215	221
217	217	220	226
166	173	178	164
XXX	XXX	XXX	XXX
XXX	XXX	XXX	XXX
120	127	131	120
XXX	XXX	XXX	XXX
073	080	087	079
XXX	XXX	XXX	XXX
+050	+052	+053	+050
+050	+052	+053	+050
+051	+053	+055	+054
+052	+055	+057	+052
+054	+056	+058	+054
+055	+057	+059	+057
+056	+060	+060	+055
+057	+061	+060	+060
+058	+060	+060	+063
+059	+062	+062	+063
+060	+063	+063	+067
+061	+064	+064	+073
+062	+065	+065	+073
+063	+066	+066	+075
+064	+067	+067	+075
+065	+068	+068	+078
+066	+069	+069	+078
+067	+070	+070	+078
+068	+071	+071	+078
+069	+072	+072	+078
+070	+073	+073	+078
+			

211073														191073			201073			CABA UW					
GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D 200	274	241	242	274	272	267	279	280	324	347	001	003	004	357	356	353	358	007	024	024	027	028	068	164	
D 80	221	223	246	255	259	273	278	316	341	357	356	350	327	331	325	335	336	347	331	269	240	230	215		
D 10	225	203	244	257	264	259	273	279	315	336	352	349	334	291	281	285	307	340	281	249	244	245	242	223	
F 200	160	150	137	132	135	140	151	146	112	093	085	078	054	045	045	036	035	025	021	013	007	001	007	004	
F 160Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 120Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 80	124	118	101	103	099	103	118	114	100	075	062	052	035	032	029	031	028	018	008	005	005	010	003	014	
F 40Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 20Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 10	089	085	070	064	064	065	082	076	067	048	038	029	015	017	015	017	015	012	004	011	013	014	004	010	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx													
F 200	+092	+094	+098	+094	+094	+109	+092	+091	+086	+082	+078	+074	+075	+080	+079	+077	+075	+077	+078	+078	+079	+078	+078	+078	
F 160	+091	+094	+099	+097	+096	+110	+095	+093	+089	+085	+080	+077	+075	+082	+082	+080	+078	+079	+081	+080	+080	+081	+082	+081	
F 120	+092	+094	+100	+099	+103	+116	+097	+094	+091	+087	+083	+080	+077	+085	+085	+083	+081	+082	+083	+084	+082	+083	+084	+083	
F 80	+223	+095	+101	+101	+100	+139	+099	+096	+094	+090	+088	+084	+088	+088	+086	+086	+085	+084	+085	+086	+086	+086	+086	+086	
F 40	+095	+197	+102	+103	+116	+118	+102	+098	+096	+092	+088	+084	+081	+087	+088	+088	+087	+085	+086	+086	+087	+086	+086	+086	
F 20	+196	+094	+103	+105	+109	+119	+103	+099	+097	+093	+089	+085	+085	+089	+088	+088	+088	+087	+085	+086	+086	+087	+086	+086	
F 10	+096	+098	+103	+105	+108	+118	+103	+099	+097	+094	+089	+085	+082	+085	+086	+087	+087	+088	+086	+085	+085	+084	+083	+083	
F 2	+226	+092	+102	+105	+103	+136	+102	+099	+097	+094	+089	+085	+084	+087	+085	+085	+086	+086	+083	+079	+078	+078	+078	+078	
C 1200	+000	+000	+000	+000	+000	+000	+015	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	
C 20	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	

211073														191073			201073			CABA UW						
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15															
105	171	200	247	348	319	149	218	265	290	253	247	242	255	257	240	252	242	244	246	237	235	D 200				
200	195	199	220	258	313	033	111	201	260	263	230	225	229	238	239	234	241	239	234	231	232	231	D 80			
211	140	193	271	348	007	035	114	216	264	218	221	226	231	244	242	239	244	248	242	236	224	230	234	D 10		
U 09	011	001	000	011	002	000	002	033	029	026	041	044	045	038	035	041	042	047	054	061	076	087	F 200			
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z			
U 15	014	017	026	006	004	005	007	027	021	028	032	038	041	036	036	042	040	049	048	050	061	073	F 120Z			
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80			
U 06	015	014	007	009	010	010	007	011	019	010	019	029	031	035	036	033	040	038	041	044	034	043	048	F 20Z		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10			
F 78	+078	+076	+076	+074	+072	+072	+075	+071	+071	+073	+075	+075	+078	+078	+081	+085	+088	+091	+094	+095	+096	+097	+096	T 200		
F 68	+081	+081	+081	+079	+077	+074	+073	+075	+078	+074	+073	+076	+077	+078	+081	+085	+089	+092	+095	+098	+099	+099	+099	+099	T 160	
F 58	+085	+086	+084	+084	+081	+079	+080	+082	+079	+078	+080	+083	+085	+086	+088	+090	+093	+094	+099	+102	+103	+102	+103	+103	T 120	
F 48	+087	+086	+086	+086	+084	+084	+085	+087	+087	+086	+087	+087	+089	+090	+092	+097	+100	+103	+106	+107	+105	+107	+106	+106	T 80	
F 38	+088	+086	+086	+085	+085	+083	+082	+082	+081	+081	+080	+080	+084	+084	+089	+091	+095	+099	+104	+104	+106	+104	+104	+104	T 40	
F 28	+089	+086	+086	+086	+086	+086	+086	+087	+087	+087	+087	+087	+088	+088	+089	+090	+090	+090	+090	+090	+090	+090	+090	+090	T 20	
F 18	+091	+088	+088	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	+087	T 2	
F 8	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	+092	T 2	
F 2	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	+093	T 2	
F 200	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200	
F 100	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20	

211073														191073			201073			CABA UW				
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15													
269	265	261	264	266	262	252	259	281	311	309	319	330	342	344	337	336	338	343	344	341	338	344	D 200	
266	264	257	260	261	259	247	246	255	267	298	303	306	330	344	337	338	339	344	345	342	337	343	D 80	
267	266	250	262	261	252	250	253	266	292	302	305	329	343	345	337	336	340	344						

21107

21107

601-602

221173

321073

221073

331071

221-222

GMT	221073												231073			CABA UW		
	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03						
D 200	215	217	219	214	208	207	211	217	222	220	218	221	224	228	244	256	267	281
D 80	212	213	214	209	202	199	205	209	216	213	212	216	220	224	230	234	236	288
D 10	214	217	219	215	207	201	210	213	220	218	216	221	225	230	233	236	250	295
F 200	105	122	126	117	130	133	140	138	134	128	129	138	144	146	131	111	097	086
F 160Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 120Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 80	075	093	096	091	100	100	106	106	102	097	099	108	113	114	106	089	075	060
F 40Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 20Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
F 10	045	056	062	059	062	061	067	069	067	065	064	077	074	082	078	061	048	032
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	031	042	047
T 200	+066	+063	+064	+065	+065	+067	+067	+070	+073	+076	+077	+080	+083	+086	+093	+100	+102	+102
T 160	+069	+068	+066	+067	+068	+068	+069	+071	+075	+077	+079	+082	+085	+088	+093	+099	+102	+103
T 120	+071	+068	+069	+070	+070	+071	+071	+073	+077	+079	+081	+083	+087	+090	+094	+099	+103	+104
T 80	+074	+073	+071	+072	+072	+073	+074	+075	+078	+081	+083	+085	+089	+092	+095	+105	+105	+106
T 40	+076	+073	+074	+074	+075	+075	+076	+077	+080	+083	+085	+087	+091	+094	+097	+102	+105	+106
F 20	+078	+075	+075	+081	+076	+076	+077	+078	+082	+084	+086	+088	+091	+095	+097	+101	+103	+104
T 9	+078	+081	+077	+076	+076	+076	+078	+078	+082	+085	+086	+088	+092	+095	+099	+101	+103	+104
T 2	+079	+076	+076	+070	+077	+077	+078	+079	+082	+085	+086	+089	+092	+095	+093	+101	+103	+105
	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
CT 20J	+000	-002	-000	+000	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	-000	+000	+000
CT 2J	-000	-002	-000	+005	-000	-000	-000	-000	-001	-000	-000	-000	-000	-000	-000	-002	-002	-006

25:473

331073

331073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
510 511 314 313 310 304 312 311 312 312 315 314 315 315 315 315 313 313 312 308 307 307 316 305 309 D200	306 316 308 310 320 300 310 307 304 307 312 310 312 314 315 313 309 313 308 306 299 321 305 308 D 80	303 312 298 305 319 235 307 306 303 305 309 308 309 314 311 308 313 308 306 306 325 307 309 D 10									
153 141 150 149 141 123 127 140 143 142 136 138 129 110 100 114 106 115 109 112 115 111 122 127 F200	105 097 096 108 105 081 095 102 100 105 105 105 094 095 107 088 093 102 091 101 105 099 102 110 F 80	063 u9 053 069 061 037 055 062 050 070 069 070 063 066 062 073 066 066 074 082 065 075 078 F 10									
xxx F 2	xxx F 200	xxx F16070									
* * * * *	* * * * *	* * * * *									
+082 +077 +097 +096 +094 +096 +082 +093 +095 +092 +094 +094 +097 +098 +100 +098 +100 +097 +100 +101 +103 +097 +106 +101 T200	+084 +097 +098 +098 +096 +097 +094 +094 +096 +095 +096 +097 +099 +102 +103 +101 +104 +097 +103 +104 +106 +115 +113 +105 T160	+088 +110 +100 +099 +097 +098 +096 +076 +098 +097 +098 +099 +102 +106 +107 +104 +108 +087 +100 +108 +110 +116 +116 +108 T120	+090 +096 +100 +100 +096 +096 +097 +098 +099 +099 +100 +102 +104 +110 +111 +108 +112 +088 +107 +112 +115 +105 +112 +112 T 80	+092 +067 +096 +100 +096 +094 +097 +099 +098 +099 +102 +101 +104 +107 +113 +114 +111 +116 +106 +113 +116 +119 +121 +123 +115 T 40	+093 +010 +093 +100 +096 +093 +096 +098 +100 +103 +102 +106 +108 +115 +116 +112 +118 +106 +115 +118 +122 +122 +124 +117 T 20	+092 +079 +091 +097 +093 +088 +093 +095 +097 +101 +102 +105 +109 +117 +116 +113 +120 +095 +094 +113 +125 +124 +124 +117 T 9	+000 +004 +000 +001 +001 +001 +004 +003 +000 +001 +001 +000 +000 -000 xxx -000 -000 +017 +003 -000 -000 +011 +006 +000 CT200	+000 -016 -004 -000 -000 -000 -000 -000 -000 -000 -000 -000 +000 +000 -000 -000 -000 +000 +012 +007 +000 +000 +014 +008 +000 CT 20			

231073

231073

241073

CABA UW

04T	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03														
S 200	513	310	316	316	323	426	328	330	331	333	336	341	343	346	347	344	346	342	339	347	343	346	353	353		
D 80	329	311	313	315	317	316	319	324	323	325	331	336	336	341	340	334	339	340	332	330	327	333	340	346	353	
D 10	328	308	311	312	308	308	311	313	311	311	320	322	314	332	278	287	298	284	274	283	289	295	302	304		
F 200	128	117	116	108	115	114	118	121	108	106	105	105	105	105	105	079	087	080	087	083	075	071	072	076	073	069
F 160Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 220Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	115	094	086	083	074	078	079	085	078	079	078	068	053	058	061	060	056	059	057	065	062	060	062	060	065	069
F 40Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 2uZ	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	070	055	045	041	029	032	032	029	026	031	032	025	018	014	016	020	018	019	018	017	020	023	021	018	021	018
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 200	+110	+099	+099	+097	+097	+097	+097	+097	+096	+095	+095	+093	+094	+089	+091	+092	+091	+093	+092	+092	+092	+092	+091	+091	+092	+092
F 160	+113	+102	+101	+100	+099	+098	+098	+100	+098	+097	+098	+095	+091	+092	+094	+093	+096	+096	+094	+094	+094	+094	+093	+095	+095	+095
F 120	+106	+105	+104	+103	+100	+099	+098	+100	+099	+098	+099	+097	+096	+092	+093	+095	+096	+097	+098	+096	+096	+095	+095	+097	+097	+097
F 80	+119	+107	+105	+104	+101	+099	+097	+097	+097	+096	+096	+094	+092	+092	+093	+093	+096	+097	+098	+096	+096	+095	+095	+097	+097	+097
F 40	+112	+108	+105	+103	+100	+097	+094	+091	+090	+092	+092	+089	+085	+086	+086	+086	+090	+089	+086	+086	+089	+089	+089	+089	+088	+089
F 20	+113	+108	+105	+101	+097	+093	+090	+086	+083	+085	+087	+083	+079	+079	+077	+077	+079	+076	+074	+074	+072	+071	+075	+075	+075	+075
F 2	+112	+106	+101	+096	+088	+084	+081	+075	+070	+070	+072	+064	+063	+046	+042	+043	+035	+039	+043	+043	+050	+046	+046	+046	+046	+046
CT 200	+010	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
CT 20	+010	-010	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

241073

241073

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15														
357	359	011	011	014	016	017	359	352	002	027	020	010	320	280	250	160	207	239	229	227	244	249	239	D 200	
343	346	344	351	010	011	006	358	357	019	043	034	137	263	264	261	184	113	244	238	233	249	248	229	D 80	
290	296	269	277	165	221	225	290	272	205	224	272	255	255	251	159	130	225	219	238	246	257	254	226	D 10	
U 66	U 63	000	054	043	037	038	033	026	018	014	012	005	001	005	001	007	013	003	012	011	019	025	023	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
U 54	U 50	051	045	038	034	031	034	026	016	009	006	002	009	008	009	009	014	010	015	016	021	027	021	F 80	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
U 16	U 12	011	006	002	010	012	011	009	003	005	004	003	008	008	009	014	008	016	015	017	023	021	016	F 20	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 200	+012	+012	+001	+001	+008	+088	+089	+088	+089	+088	+089	+088	+089	+088	+089	+089	+091	+093	+093	+093	+093	+093	+093	+093	+093
F 94	+014	+013	+004	+003	+009	+090	+091	+091	+092	+092	+091	+091	+094	+094	+097	+097	+099	+101	+103	+104	+104	+105	+105	+104	T 200
F 95	+015	+015	+005	+007	+096	+092	+091	+092	+091	+094	+093	+092	+092	+097	+100	+103	+103	+105	+107	+108	+109	+109	+108	+108	T 160
F 95	+014	+014	+006	+005	+096	+091	+091	+091	+092	+092	+091	+091	+094	+094	+097	+100	+103	+103	+105	+107	+108	+109	+108	+108	T 120
F 84	+014	+013	+003	+004	+082	+082	+080	+084	+085	+085	+088	+085	+084	+084	+085	+085	+091	+096	+101	+104	+104	+105	+105	+104	T 80
F 71	+017	+017	+007	+007	+084	+084	+084	+085	+085	+085	+088	+084	+084	+085	+085	+088	+089	+091	+091	+091	+091	+091	+091	+091	T 40
F 20	+117	+118	+115	+111	+109	+108	+108	+106	+105	+105	+104	+104	+104	+104	+104	+104	+104	+105	+105	+105	+105	+105	+105	+105	T 20
F 2	+119	+118	+115	+111	+106	+105	+101	+092	+086	+086	+087	+080	+081	+069	+068	+068	+066	+066	+066	+066	+066	+063	+063	+060	+058
F 200	+000	+010	+010	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200
CT 20	+000	+010	+010	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20

241073

241073

04T	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
S 200	243	261	252	281	300	273	256	227	237	213	209	217	217	220	219	224	223	220	219	223	228	230	234	234	
D 80	223	253	262	261	266	269	236	222	234	206	202	201	194	203	202	205	208	210	209	211	212	216	217	231	228
D 10	218	258	261	262	260	239	204	179	191	184	149	159	174	174	172	178	174	180	177	186	195	195	192	192	192
F 200	022	026	021	013	000	000	002	011	022	032	036	042	044	046	048	051	049	052	057	060	063	066	071		
F 160Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 210Z	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	019	023	020	017	018	010	007	019	017	021	032	038	041	043	047	048	052	060	059						

251673

251073

261037

261 U.S.

261073

201073

361073

• 84 •

271073

— 1 —



241077

10103

5011173

301073

301073

7.2.1 会員登

511073

391 of 77

611

011173															011173															
03-04		04-05		05-06		06-07		07-08		08-09		09-10		10-11		11-12		12-13		13-14		14-15								
121	120	121	123	125	128	131	133	136	135	134	132	131	134	135	134	137	134	131	138	141	144	144	135	0200						
110	110	111	113	116	119	119	121	122	125	125	123	126	129	129	124	128	128	127	129	132	138	137	125	0 80						
107	108	109	111	119	122	122	122	123	127	126	127	130	133	131	124	131	130	132	134	132	134	138	127	0 10						
150	149	149	143	147	143	141	143	145	135	119	099	089	080	072	063	058	060	063	059	061	052	061	063	F200						
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
094	093	092	083	074	094	094	024	090	083	077	067	063	068	064	058	053	056	058	056	054	047	055	048	F 80						
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
047	047	043	045	071	053	052	051	050	052	051	052	057	056	051	048	043	044	047	043	040	035	039	035	F 10						
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx		
+054	+051	+049	+048	+047	+045	+046	+046	+049	+045	+042	+043	+046	+047	+052	+059	+064	+067	+069	+071	+073	+075	+078	+082	T200						
+053	+050	+049	+048	+047	+045	+044	+043	+043	+042	+042	+044	+048	+050	+055	+062	+067	+070	+072	+075	+076	+078	+082	+085	T160						
+053	+050	+049	+048	+047	+045	+044	+043	+042	+042	+044	+047	+051	+054	+059	+066	+071	+074	+077	+078	+079	+083	+085	+088	T120						
+052	+049	+049	+047	+047	+047	+046	+044	+043	+042	+042	+044	+046	+050	+055	+058	+062	+070	+075	+078	+081	+082	+083	+084	+089	+092	T 80				
+051	+049	+049	+047	+047	+047	+046	+044	+043	+042	+042	+044	+046	+050	+054	+059	+062	+067	+074	+080	+082	+085	+087	+087	+091	+093	+096	T 40			
+051	+049	+049	+047	+047	+047	+046	+044	+043	+042	+042	+044	+048	+052	+057	+062	+065	+069	+072	+082	+085	+087	+089	+090	+093	+095	+098	T 20			
+049	+049	+047	+047	+047	+048	+047	+045	+043	+044	+049	+053	+057	+062	+065	+071	+078	+083	+086	+088	+090	+091	+094	+096	+098	+098	+098	T 9			
+049	+049	+047	+045	+046	+046	+045	+043	+042	+043	+048	+054	+058	+064	+068	+074	+082	+086	+088	+090	+091	+092	+096	+096	+098	+098	+098	T 2			
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT200		
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT20		

211173

21

021173

021173

031173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	222	201	181	157	159	150	135	116	116	117	133	138	142	148	157	162	162	168	173	179	181	186	187	185
D 80	137	142	135	120	124	125	113	104	104	102	112	108	111	107	106	112	114	118	122	122	129	132	138	137
D 10	114	110	105	103	105	108	078	072	083	085	098	109	108	096	095	101	105	107	113	111	120	122	126	125
F 200	015	016	015	016	018	015	018	022	031	039	052	076	077	071	068	070	064	060	055	056	058	053	051	047
F 160ZO	YXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX										
F 120ZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 80	012	013	015	020	023	071	023	028	038	045	048	061	054	048	056	055	064	066	064	054	058	055	056	056
F 4LZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 20ZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
F 10	015	018	016	018	016	012	017	017	017	017	015	019	030	022	018	020	023	026	030	028	020	026	024	022
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
T 200	+075	+076	+076	+076	+077	+077	+076	+076	+076	+077	+077	+084	+094	+094	+105	+108	+113	+117	+119	+121	+123	+125	+127	+129
T 160	+078	+079	+079	+079	+079	+079	+078	+078	+078	+078	+078	+083	+087	+085	+092	+098	+110	+115	+120	+121	+124	+128	+126	
T 120	+079	+081	+081	+081	+081	+081	+081	+081	+081	+082	+083	+085	+085	+084	+084	+091	+093	+097	+097	+102	+099	+103	+101	
T 80	+078	+080	+081	+082	+082	+083	+083	+082	+082	+082	+084	+082	+080	+080	+080	+080	+080	+078	+078	+077	+076	+075	+074	+073
T 40	+080	+081	+080	+080	+080	+080	+080	+080	+080	+080	+080	+079	+080	+080	+080	+080	+079	+079	+078	+078	+078	+078	+076	
T 20	+082	+082	+082	+081	+081	+081	+081	+081	+081	+080	+080	+080	+080	+080	+080	+080	+080	+078	+078	+077	+076	+075	+074	+073
T 9	+083	+083	+082	+082	+082	+082	+082	+081	+081	+080	+080	+080	+080	+080	+080	+080	+080	+079	+078	+078	+078	+076	+075	+074
T 2	+083	+083	+083	+082	+082	+082	+081	+081	+080	+080	+079	+080	+080	+080	+080	+080	+078	+078	+078	+078	+078	+076	+075	
C 1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	
C 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	

031173

031173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15												
192	190	192	197	190	191	189	187	180	170	172	181	175	168	155	154	146	137	134	134	131	122	D 200	
144	152	151	155	160	173	172	166	161	157	149	146	145	148	140	137	141	132	129	124	119	117	110	D 80
134	125	125	136	137	136	138	137	133	130	131	144	144	146	143	140	137	135	127	120	120	113	113	D 10
044	045	054	057	053	053	049	049	051	046	044	051	054	067	063	056	052	054	048	056	057	075	077	F 200
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
050	052	055	064	060	060	061	062	060	061	061	052	051	047	042	042	039	042	043	049	047	052	053	F 80
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX											
017	023	027	025	018	024	027	025	025	024	026	029	034	038	039	037	035	036	037	037	037	037	037	031
XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 10											
*128	+127	+129	+127	+123	+121	+117	+117	+118	+121	+121	+119	+114	+101	+105	+102	+106	+111	+112	+113	+114	+121	+123	T 200
+121	+120	+122	+123	+119	+121	+116	+114	+118	+115	+114	+113	+095	+093	+097	+101	+107	+111	+115	+116	+116	+117	+117	T 160
+096	+105	+103	+104	+110	+109	+098	+090	+088	+092	+091	+088	+089	+094	+099	+104	+110	+114	+119	+119	+118	+118	+118	T 120
+074	+041	+083	+079	+078	+088	+087	+082	+080	+080	+079	+083	+086	+092	+097	+102	+108	+114	+118	+123	+123	+123	+121	T 80
+071	+071	+071	+069	+071	+074	+075	+074	+074	+077	+077	+085	+089	+095	+101	+107	+112	+118	+122	+127	+127	+126	+125	T 40
+072	+071	+071	+070	+072	+073	+073	+074	+075	+075	+078	+087	+091	+098	+104	+105	+115	+121	+125	+129	+129	+127	+125	T 20
+071	+071	+071	+070	+071	+072	+072	+073	+073	+074	+075	+079	+088	+093	+099	+106	+110	+117	+122	+126	+130	+131	+128	+126
+071	+071	+071	+070	+071	+072	+072	+073	+073	+074	+075	+078	+087	+091	+096	+104	+105	+115	+122	+127	+130	+132	+131	+124
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

031173

031173

041173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03											
D 200	117	124	136	140	144	145	141	141	148	153	159	177	181	179	185	180	181	182	182	183	185	187	
D 80	105	116	110	115	117	119	121	122	123	123	124	133	133	135	139	134	136	135	134	136	139	140	
D 10	108	116	105	110	114	118	118	119	120	118	121	129	122	123	121	129	126	124	125	127	125	125	
F 200	066	072	075	093	102	100	095	094	092	091	096	103	105	098	088	095	112	116	113	111	107	101	099
F 160ZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 200											
F 120ZO	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 160ZO											
F 80	C56	062	067	077	046	090	093	089	084	078	076	081	088	089	095	082	075	073	078	081	087	094	
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	F 40Z0											
F 10	032	036	033	036	037	040	044	045	045	043	043	037	033	032	036	038	041	033	035	029	025	030	

41173

041173

051173

60804

051173

051173

21173

051173

061173

SABAUW

061175

061173

061173

061173

071173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	252	305	329	326	325	317	310	313	309	309	305	304
D 80	257	264	312	319	318	313	300	290	292	291	282	293
D 10	256	250	284	284	284	305	290	270	266	307	259	267
F 200	093	084	093	104	066	116	108	099	111	093	099	116
F160Z0	xxx											
F120Z0	xxx											
F 80	060	077	056	061	043	093	088	075	076	054	070	085
F 40Z0	xxx											
F 20Z0	xxx											
F 10	054	045	036	025	027	055	047	035	040	021	030	037
F 2	x <xx></xx>											
T200	+054	+062	+061	+065	+064	+058	+057	+062	+059	+057	+058	+058
T16U	+053	+062	+062	+066	+065	+060	+059	+063	+061	+058	+064	+065
T120	+053	+062	+063	+067	+063	+061	+063	+063	+068	+065	+060	+065
T 80	+053	+058	+064	+067	+068	+065	+061	+063	+063	+065	+062	+061
T 40	+054	+055	+064	+066	+065	+059	+059	+060	+049	+053	+057	+061
T 20	+055	+053	+052	+062	+059	+062	+058	+053	+054	+046	+048	+049
T 9	+054	+051	+050	+058	+054	+060	+056	+049	+051	+043	+045	+045
T 2	+041	+042	+051	+037	+037	+055	+050	+040	+035	+030	+036	+048
CT200	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
CT 20	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

071173

071173

J3-04

04-05

05-06

06-07

07-08

08-09

09-10

10-11

11-12

12-13

13-14

14-15

280	281	281	285	285	282	290	278	279	280	275	271	266	261	259	260	267	265	268	268	270	264	264	263	D 200
273	273	270	266	269	265	263	262	262	264	257	255	257	254	255	257	263	261	265	263	262	255	253	255	D 80
271	273	267	263	255	254	257	256	257	253	255	255	258	258	258	260	264	266	264	262	254	251	255	D 10	
110	110	108	107	100	101	104	103	100	100	101	099	106	102	090	102	097	098	093	097	095	087	093	102	F 200
xxx	F160Z0																							
077	077	076	085	081	078	083	084	082	085	084	077	088	079	079	090	087	084	078	078	076	067	067	078	F 80
xxx	F 40Z0																							
036	036	038	046	043	043	048	049	046	050	050	049	055	053	062	070	064	062	054	052	047	042	042	048	F 20
xxx	F 2																							
+063	+063	+064	+065	+065	+065	+065	+065	+066	+067	+067	+066	+066	+064	+065	+065	+065	+065	+065	+065	+067	+068	+070	+072	T 200
+066	+065	+066	+067	+067	+067	+067	+068	+068	+069	+067	+069	+069	+069	+069	+069	+069	+069	+069	+069	+069	+070	+071	+075	T 160
+064	+067	+065	+069	+069	+069	+070	+071	+072	+072	+071	+070	+071	+073	+073	+073	+072	+072	+072	+073	+073	+074	+076	+078	T 120
+070	+069	+069	+070	+070	+070	+070	+070	+071	+072	+073	+073	+071	+072	+073	+077	+077	+076	+076	+076	+076	+076	+078	+080	T 80
+069	+069	+068	+068	+069	+069	+069	+071	+071	+073	+073	+073	+075	+076	+076	+081	+081	+080	+080	+080	+079	+078	+080	+080	T 40
+062	+062	+064	+068	+068	+068	+068	+070	+070	+072	+073	+073	+076	+076	+076	+082	+082	+082	+082	+082	+082	+082	+082	+082	T 20
+051	+053	+064	+065	+066	+065	+065	+068	+070	+071	+071	+071	+076	+076	+079	+085	+085	+085	+085	+085	+085	+085	+085	+085	T 9
+001	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20

071173

071173

081173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	260	255	257	252	232	253	250	248	251	252	253	251
D 80	252	248	249	245	241	239	236	234	232	230	237	238
D 10	251	247	250	246	242	233	232	230	228	230	226	236
F 200	100	100	104	100	078	087	091	092	099	105	099	113
F160Z0	xxx											
F120Z0	xxx											
F 80	078	076	076	077	079	064	073	073	071	083	087	080
F 40Z0	xxx											
F 20Z0	xxx											
F 10	046	046	050	047	048	042	046	044	053	048	057	067
F 2	xxx											
T200	+073	+074	+074	+073	+072	+070	+070	+072	+074	+074	+079	+078
T160	+076	+077	+076	+075	+075	+072	+073	+073	+075	+079	+078	+079
T120	+079	+080	+080	+078	+077	+075	+074	+075	+076	+079	+078	+084
T 80	+081	+082	+082	+081	+079	+077	+077	+076	+076	+078	+078	+083
T 40	+082	+084	+084	+083	+081	+078	+079	+077	+077	+078	+078	+084
T 20	+052	+052	+084	+085	+083	+082	+082	+082	+082	+082	+082	+082
T 9	+031	+082	+082	+083	+082	+077	+077	+076	+076	+077	+078	+081
T 2	+079	+080	+081	+079	+078	+074	+074	+074	+075	+074	+077	+080
CT200	-000	+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

081173

081173

03-04

04-05

05-06

06-07

07-08

08-09

09-10

10-11

11-12

12-13

13-14

14-15

254	261	261	263	263	265	267	266	262	263	264	263	265	268	267	270	266	265	263	257	259	250	
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	--

8117

081173

224437

191173

081173

091173

221-135

101173

101173

101173

111173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	214	214	216	218	216	217	218	221	224	226	249	283
D 80	211	211	212	216	213	213	215	218	221	223	242	277
D 10	215	215	216	220	217	217	219	222	226	227	245	275
F200	157	163	157	160	165	166	169	173	168	163	169	146
F160Z0	xxx	107										
F120Z0	xxx	101										
F 80	127	137	130	131	133	134	141	140	141	136	138	123
F 40Z0	xxx	083										
F 20Z0	xxx	080										
F 10	090	093	087	090	093	091	096	096	100	099	105	087
F 2	xxx	050										
T200	+071	+071	+072	+071	+071	+072	+073	+073	+074	+077	+081	+087
T160	+072	+071	+074	+073	+073	+073	+075	+075	+076	+078	+083	+085
T120	+075	+075	+078	+075	+075	+076	+076	+078	+080	+080	+085	+086
T 80	+077	+076	+082	+077	+077	+077	+078	+078	+080	+080	+089	+090
T 40	+079	+078	+086	+079	+079	+079	+081	+080	+082	+084	+088	+094
T 20	+080	+081	+087	+080	+080	+080	+082	+082	+083	+085	+089	+094
T 9	+081	+079	+086	+081	+081	+081	+082	+082	+084	+085	+086	+094
T 2	+081	+080	+088	+081	+081	+083	+082	+084	+085	+086	+090	+092
C120U	-000	+001	+002	-000	+000	+000	+000	+000	+000	-001	-000	-000
C120	-000	-002	-000	-000	-000	-000	-000	-000	-000	-003	-000	-000

111173

111173

US-U4	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
278	278	285	286	283	242	281	277	278	277	276	275
266	265	261	273	274	273	270	264	266	264	262	263
255	248	246	262	258	257	262	262	251	258	258	259
104	103	101	104	103	112	119	119	118	115	113	114
xx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
0/0	074	077	080	076	082	083	084	084	084	089	085
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
032	034	040	041	035	036	040	037	041	046	044	052
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+0/0	+074	+075	+074	+074	+075	+073	+073	+072	+071	+071	+069
+071	+076	+077	+076	+076	+076	+074	+073	+072	+074	+072	+072
+080	+073	+079	+078	+078	+077	+077	+076	+074	+075	+073	+071
+085	+073	+077	+077	+077	+077	+076	+074	+074	+075	+076	+072
+07/	+077	+077	+077	+076	+074	+074	+072	+072	+075	+076	+075
+07/	+075	+074	+075	+074	+074	+074	+072	+072	+073	+074	+072
+074	+072	+072	+074	+074	+074	+072	+072	+073	+076	+076	+075
+075	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+076	+072	+072	+074	+074	+074	+074	+072	+072	+073	+076	+075
+077	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+078	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+079	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+080	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+081	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+082	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+083	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+084	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+085	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+086	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+087	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+088	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+089	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+090	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+091	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+092	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+093	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+094	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+095	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+096	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+097	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+098	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+099	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+100	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+101	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+102	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+103	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+104	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+105	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+106	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+107	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+108	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+109	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+110	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+111	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+112	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+113	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+114	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+115	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+116	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+117	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+118	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+119	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+120	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+121	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+122	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+123	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+124	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+125	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+126	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+127	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+128	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+129	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+130	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+131	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+132	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+133	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+134	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+135	+072	+072	+072	+072	+072	+072	+072	+073	+076	+076	+075
+136	+072	+072	+072</td								

121173

121173

131173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 20J	222	222	224	225	227	230	234	236	244	245	247	247
D 8J	221	222	224	224	225	226	231	229	235	242	244	245
D 1J	225	227	228	228	229	229	235	231	235	245	248	249
F 20J	217	212	211	210	200	189	181	183	174	211	221	214
F 16JZ	xxx											
F 12ZD	xxx											
F 8J	179	178	176	172	165	153	149	141	134	178	184	176
F 4ZC	xxx											
F 20ZD	xxx											
F 19	140	132	132	130	126	115	113	107	096	133	143	138
F 2	xxx											
T 20J	+061	-061	+065	+067	+070	+071	+074	+079	+087	+099	+100	+101
T 16J	+059	-063	+067	+068	+072	+072	+075	+080	+085	+099	+103	+104
T 12J	+062	-065	+069	+070	+074	+074	+077	+081	+089	+105	+106	+108
T 8J	+04	+067	+071	+072	+076	+076	+078	+083	+093	+108	+109	+110
T 4J	+066	+069	+073	+074	+078	+078	+080	+085	+092	+111	+110	+110
T 2U	+07	+070	+074	+076	+079	+079	+081	+086	+096	+112	+113	+113
T 2	+068	+071	+075	+076	+079	+079	+082	+086	+091	+109	+111	+113
CT 200	+014	-000	-000	-000	-000	+000	+000	+001	+003	+004	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
*												
*												
*												

131173

131173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
280	272	278	284	287	289	285	280	280	283	281	281
277	279	275	276	282	285	287	283	277	278	280	281
278	290	279	285	295	290	289	285	279	281	284	283
2U2	188	192	201	192	198	191	194	177	171	183	184
xxx											
xxx											
172	155	150	172	165	167	163	164	148	140	159	160
xxx											
xxx											
120	106	109	122	118	119	113	115	100	089	110	111
xxx											
+094	+071	-091	+092	+086	+086	+083	+080	+079	+078	+072	+065
+097	+074	-094	+095	+091	+089	+086	+083	+082	+081	+075	+065
+100	+098	-098	+098	+095	+093	+090	+087	+085	+084	+080	+081
+102	+100	-100	+101	+097	+095	+092	+089	+088	+086	+080	+085
+104	+102	-102	+103	+098	+097	+093	+090	+089	+087	+085	+085
+104	+102	-102	+104	+099	+097	+094	+091	+090	+088	+086	+085
+104	+101	-101	+103	+098	+097	+093	+090	+089	+087	+085	+085
+101	+079	-099	+101	+094	+094	+090	+087	+086	+085	+073	+063
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
*											
*											
*											

131173

131173

141173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	273	272	273	275	279	284	284	282	284	281	284	285
D 8J	271	269	270	273	277	281	281	280	280	282	279	281
D 10	275	271	272	276	279	283	284	283	282	281	280	281
F 20U	105	191	191	191	197	183	181	188	171	176	192	192
F 16ZJ	xxx											
F 12ZD	xxx											
F 8J	161	167	163	166	167	157	156	164	147	148	150	152
F 4UZ	xxx											
F 20ZD	xxx											
F 10	112	118	112	119	119	115	115	114	107	105	104	109
F 2	xxx											
T 20J	+079	+078	+079	+080	+080	+080	+079	+078	+072	+065	+068	+053
T 16J	+082	+082	+083	+084	+084	+084	+083	+081	+075	+065	+066	+078
T 12J	+085	+085	+087	+087	+087	+087	+086	+083	+083	+076	+075	+075
T 8J	+083	+088	+088	+089	+090	+090	+089	+087	+086	+080	+079	+078
T 4J	+091	+090	+092	+092	+092	+092	+091	+091	+089	+086	+086	+085
T 2U	+092	+091	+091	+093	+093	+094	+093	+093	+092	+090	+089	+089
T 2	+089	+089	+091	+092	+092	+092	+091	+091	+089	+087	+087	+087
CT 20J	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
*												
*												
*												

141173

141173

GMT	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
286	303	302	288	245	297	293	298	293	297	296	300	297
281	303	306	277	280	292	296	284	288	291	295	294	295
278	300	255	277	274	280	274	280	277	285	295	294	296
110	103	119	117	133	128	124	131	125	127	121	119	114
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
085	087	085	079	110	102	102	092	089	086	085	090	090
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
044	057	045	031	063	055	057	051	042	040	042	044	057
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx
+067	+055	+057	+065	+064	+061	+064	+065	+065	+067	+066	+067	+069
+070	+058	+059	+066	+065	+062	+066	+067	+067	+068	+070	+069	+069
+072	+051	+059	+068	+067	+064	+067	+065	+067	+068	+070	+069	+069
+074	+045	+058	+066	+064	+066	+066	+069	+074	+077	+070	+066	+074
+073	+057	+061	+064	+064	+063	+066	+069	+071	+074	+077	+066	+074

141173

141173

151173

## CADMIUM

GHT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	283	276	271	274	273	272	268	253	251	250	239	227
D 80	277	267	263	263	259	260	254	236	230	221	214	204
D 10	272	259	261	258	253	247	232	223	210	211	205	197
F 200	094	089	099	108	104	100	092	083	079	085	083	096
F160ZO	XXX	106	110									
F120ZO	XXX	109	102									
F 80	077	073	079	084	089	087	073	067	069	077	086	089
F 40ZO	XXX	083	081									
F 20ZO	XXX	081	077									
F 10	043	035	042	043	040	041	033	032	029	037	042	045
F 2	XXX	044	044									
T200	+066	+064	+062	+064	+064	+064	+066	+064	+066	+065	+063	+063
T160	+069	+067	+064	+067	+067	+067	+069	+068	+067	+064	+064	+060
T120	+072	+071	+067	+068	+069	+071	+070	+069	+069	+063	+062	+059
T 80	+075	+072	+069	+067	+069	+071	+070	+070	+065	+062	+060	+059
T 40	+075	+071	+070	+065	+065	+068	+067	+062	+057	+054	+053	+059
T 20	+075	+069	+069	+064	+063	+065	+062	+066	+053	+053	+054	+059
T 9	+074	+066	+068	+063	+060	+060	+055	+052	+051	+048	+050	+053
T 2	+070	+058	+064	+060	+054	+051	+042	+048	+047	+045	+048	+052
CT200	-000	-000	-000	+000	+001	+001	+000	-000	-001	-000	-001	-000
CT 20	-000	-001	-000	+000	+000	+000	-000	-000	-001	-001	-001	-000

151173

151173

151173

GMT	151173												161173			CABA UW	
	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03					
D20U	279	280	280	284	286	284	281	282	281	278	280	283	283	282	283	285	284
D 80	275	276	276	280	281	279	271	274	274	274	276	279	278	276	277	281	279
D 10	XXX	279	278	281	281	280	271	273	274	276	279	282	280	277	278	280	283
F200	148	155	156	144	135	175	166	151	164	169	172	165	160	157	166	165	158
F160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F 80	123	125	127	117	115	146	119	116	128	132	139	135	128	126	132	136	127
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
F 10	XXX	080	079	073	076	101	068	064	074	083	091	087	082	080	084	082	079
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
T200	+069	+069	+069	+070	+061	+035	+055	+062	+062	+061	+060	+058	+058	+059	+059	+058	+059
T160	+072	+071	+072	+072	+066	+034	+054	+064	+064	+063	+062	+061	+061	+061	+061	+060	+061
T120	+075	+074	+075	+075	+067	+038	+055	+065	+066	+065	+064	+063	+064	+064	+063	+062	+064
T 80	+078	+076	+076	+077	+069	+038	+049	+065	+066	+066	+067	+066	+065	+065	+065	+066	+067
T 40	+080	+078	+077	+078	+070	+041	+049	+064	+065	+066	+068	+067	+066	+066	+065	+066	+067
T 20	+080	+078	+077	+078	+070	+042	+036	+062	+064	+065	+068	+068	+066	+066	+065	+066	+067
T 8	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
T 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
CT200	+000	+000	+000	+000	-002	-009	-009	+000	+000	+000	-000	+000	+000	+000	+000	+000	+000
CT 20	-000	-000	-000	-000	-001	-000	-008	-000	-000	-000	-000	-008	-000	-000	-000	-000	-000

161173

161173															
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15				
279 275	277 266	254 250	245 264	265 264	262 265	258 254	264 273	273 276	277 287	287 291	291 290	287	D 200		
269 262	261 253	230 221	228 246	233 246	242 244	243 239	259 270	270 274	274 286	286 289	289 288	286	D 80		
258 249	249 244	220 216	230 240	247 240	230 243	xxx xxx	xxx	D 10							
125 116	100 109	102 093	091 091	097 111	106 110	096 102	119 129	116 145	128 163	163 166	166 182	170	156	F 200	
xxx xxx	xxx	xxx	F 160Z0												
xxx xxx	xxx	xxx	F 120Z0												
090 084	080 084	074 080	070 064	064 081	076 083	078 080	096 113	097 126	111 145	142 162	162 148	148	F 80		
xxx xxx	xxx	xxx	F 40Z0												
xxx xxx	xxx	xxx	F 20Z0												
042 043	041 040	044 045	043 035	032 044	040 049	091 053	069 080	070 086	xxx xxx	xxx xxx	xxx xxx	xxx	xxx		
xxx xxx	xxx	xxx	F 10												
*063 +064	+064 +065	+065 +064	+057 +041	+044 +048	+058 +063	+066 +065	+055 +056	+068 +072	+073 +074	+073 +073	+057 +068	+067 +064	+063	T 200	
+065 +066	+066 +068	+068 +056	+058 +042	+045 +048	+055 +064	+068 +057	+053 +053	+067 +075	+076 +078	+077 +077	+065 +071	+071 +067	+067	T 160	
+066 +067	+067 +068	+068 +066	+055 +043	+047 +050	+056 +065	+064 +059	+055 +055	+072 +079	+079 +081	+080 +080	+067 +075	+075 +071	+071 +070	T 120	
+066 +066	+069 +070	+064 +053	+053 +044	+048 +051	+057 +064	+068 +062	+060 +077	+083 +083	+085 +084	+085 +084	+062 +078	+078 +073	+073	T 80	
+059 +059	+059 +065	+065 +061	+052 +045	+040 +052	+052 +061	+069 +064	+064 +060	+071 +086	+086 +086	+088 +088	+088 +064	+077 +081	+075	T 40	
xxx xxx	xxx	xxx	T 20												
xxx xxx	xxx	xxx	T 9												
*	*	*	*	*	*	*	*	*	*	*	*	*	*	T 2	
+000 +000	+000 +000	+000 +000	+001 +000	+000 +000	+002 +003	+000 +000	+001 +003	+009 +000	+000 +000	+000 +000	+000 +000	+005 +001	+001 +000	+000	CT200
-000 -000	-000 -000	-000 -000	+001 -000	-000 -000	-000 -000	+000 +004	+002 -004	-007 -000	-000 -000	-000 -000	-000 -000	+000 -003	+000 -000	-000	

171173

171173

181173

181173

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	193	192	188	189	186	191	195	195	196	201	205	206
D 80	194	187	186	188	184	186	187	188	191	192	194	195
D 10	190	175	162	173	173	178	178	176	172	170	174	175
F200	062	065	062	072	077	084	093	102	116	134	143	148
F160Z0	xxx											
F120Z0	xxx											
F 80	063	061	061	075	082	091	099	091	088	098	095	079
F 40Z0	xxx											
F 20Z0	xxx											
F 10	032	027	023	031	037	040	041	041	038	039	035	032
F 2	xxx											
T200	+030	+030	+029	+028	+026	+025	+026	+028	+031	+037	+041	+040
T160	+034	+034	+033	+031	+029	+027	+028	+030	+032	+037	+042	+041
T120	+038	+037	+036	+034	+032	+029	+030	+031	+029	+032	+030	+024
T 80	+041	+040	+039	+037	+033	+031	+030	+032	+020	+019	+023	+022
T 40	+041	+038	+036	+032	+027	+020	+018	+017	+013	+010	+010	+012
T 20	+041	+035	+029	+021	+017	+015	+014	+011	+008	+006	+009	+013
T 9	+039	+033	+027	+022	+019	+015	+013	+012	+010	+006	+004	+007
T 2	+030	+020	+013	+009	+012	+010	+009	+008	+006	+002	+001	+003
CT200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

191173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	191173
231	229	228	228	232	234	236	237	240	244	252	269	276
222	220	218	220	224	226	227	230	236	237	241	260	272
226	224	221	223	229	229	228	230	239	241	245	260	274
152	160	165	172	170	174	166	161	164	174	161	154	156
xxx												
xxx												
116	115	120	127	124	123	121	121	124	131	123	130	144
xxx												
xxx												
079	077	081	084	088	089	082	087	092	095	086	084	098
xxx												
+037	+041	+045	+047	+051	+054	+059	+062	+066	+072	+077	+088	+091
+035	+038	+043	+045	+051	+054	+059	+063	+067	+073	+077	+090	+094
+036	+039	+043	+047	+051	+053	+059	+065	+070	+075	+079	+093	+093
+038	+041	+045	+050	+053	+055	+060	+067	+072	+077	+080	+094	+101
+041	+044	+047	+052	+056	+057	+061	+068	+075	+081	+083	+097	+103
+042	+045	+048	+053	+057	+058	+062	+069	+076	+081	+084	+097	+105
+042	+045	+048	+053	+057	+058	+062	+069	+076	+081	+084	+097	+105
+042	+045	+047	+053	+056	+058	+062	+069	+076	+081	+083	+096	+105
-000	-000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000
+000	-000	-000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000
CT200	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

191173

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	191173
D200	305	309	302	300	301	311	303	296	295	308	309	313	311
D 80	301	307	298	295	293	307	301	292	289	298	304	309	305
D 10	302	308	299	295	292	306	303	292	290	298	304	310	304
F200	161	178	163	158	147	173	178	160	161	165	162	158	149
F160Z0	xxx												
F120Z0	xxx												
F 80	135	152	134	127	121	133	147	128	127	134	130	116	129
F 20Z0	xxx												
F 10	095	105	088	078	085	100	086	086	092	079	071	083	071
F 2	xxx												
T200	+062	+060	+061	+061	+062	+066	+068	+068	+068	+066	+065	+065	+065
T160	+065	+064	+064	+064	+065	+068	+070	+070	+069	+068	+070	+067	+067
T120	+069	+067	+066	+067	+071	+074	+074	+073	+073	+072	+071	+071	+070
T 80	+072	+070	+069	+068	+069	+073	+076	+075	+075	+073	+073	+071	+071
T 40	+074	+072	+070	+070	+070	+073	+078	+077	+077	+074	+073	+072	+070
T 20	+074	+072	+070	+069	+070	+073	+078	+077	+078	+074	+073	+073	+070
T 9	+074	+071	+069	+068	+069	+071	+077	+077	+077	+073	+072	+072	+070
T 2	+072	+069	+066	+065	+066	+069	+074	+074	+075	+076	+070	+068	+068
CT200	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

201173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	201173
322	319	319	319	314	318	320	318	315	330	326	326	315
320	309	300	306	303	307	309	309	307	328	324	323	318
301	291	276	273	267	273	290	281	273	274	320	316	295
124	116	102	100	093	098	108	101	094	100	104	083	xxx
xxx												
xxx												
084	071	073	070	074	082	081	077	076	074	084	093	063
xxx												
xxx												
030	037	037	033	033	030	033	032	038	042	056	034	041
xxx												
+068	+068	+066	+067	+067	+068	+068	+068	+068	+068	+068	+068	+068
+071	+070	+068	+068	+069	+070	+070	+071	+071	+061	+064	+062	+064
+072	+071	+067	+070	+071	+072	+073	+074	+063	+067	+066	+069	+065
+070	+070	+064	+069	+065	+071	+070	+074	+073	+063	+066	+069	+076
+064	+065	+058	+062	+067	+064	+063	+066	+065	+066	+068	+073	+076
+057	+058	+052	+051	+051	+056	+055	+056	+056	+060	+066	+068	+070
+052	+054	+049	+045	+047	+051	+055	+050	+049	+059	+065	+068	+073
+039	+047	+042	+036	+041	+045	+050	+041	+041	+057	+064	+067	+075
+068	+068	+066	+067	+067	+068	+068	+068	+068	+068	+068	+068	+068
+071	+070	+068	+068	+069	+070	+070	+071	+071	+061	+064	+062	+064
+072	+071	+067	+070	+071	+072	+073	+074	+063	+067	+066	+069	+063
+												

291173

201123

311133

6481

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	332	331	321	315	320	321	313	307	310	312	317	313
D 80	333	333	320	311	313	309	300	290	284	281	289	280
D 1U	333	319	301	292	278	272	259	244	259	261	255	252
F200	080	066	060	059	022	052	044	042	043	043	041	034
F160Z0	xxx											
F120Z0	xxx											
F 80	067	057	052	049	041	036	033	039	038	041	037	038
F 40Z0	xxx											
F 2U0	xxx											
F 1U	036	026	023	025	022	019	015	022	018	023	014	018
F 2	xxx											
T200	+064	+065	+063	+063	+062	+063	+064	+063	+064	+064	+063	+063
T160	+067	+068	+066	+066	+065	+066	+067	+066	+066	+067	+067	+067
T120	+069	+072	+070	+059	+068	+069	+069	+069	+070	+070	+068	+069
T 80	+072	+074	+073	+072	+071	+071	+072	+072	+072	+071	+070	+070
T 40	+072	+073	+074	+073	+070	+072	+071	+066	+070	+071	+070	+071
T 20	+071	+072	+070	+069	+064	+062	+061	+061	+061	+058	+057	+058
T 9	+070	+070	+067	+065	+058	+054	+050	+054	+050	+056	+046	+044
T 2	+069	+064	+057	+056	+046	+028	+036	+039	+029	+030	+028	+023
	*											
CT200	+003	+002	+000	-001	-000	+000	+000	-001	-001	-000	-001	-001
CT 20	-000	-000	-000	-000	+000	+000	+000	-000	-000	-000	-000	-000

211173

211173

211173

211173

2211

CABAUV

221173

221473

221173

221173

231173

GABAUM

231173

231173

231173

241175

241173

341173

241173

251171

SABAH

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	250	247	249	250	251	252	258	268	291	289	296	299
D 80	245	242	246	246	248	247	255	264	291	287	295	295
D 10	251	248	252	252	254	253	260	268	295	291	298	305
F 200	193	203	196	203	199	199	213	220	217	223	224	194
F160Z0	xxx	166										
F120Z0	xxx											
F 80	155	168	156	167	159	165	175	192	195	196	198	166
F 40Z0	xxx											
F 20Z0	xxx											
F 10	113	123	120	120	120	133	140	142	144	144	120	101
F 2	xxx											
T200	+0.77	+0.82	+0.94	+0.95	+0.96	+0.98	+1.02	+1.01	+0.88	+0.83	+0.75	+0.65
T160	+0.81	+0.77	+0.96	+0.98	+0.99	+1.01	+1.05	+1.05	+0.92	+0.87	+0.78	+0.68
T120	+0.81	+0.80	+0.99	+1.01	+1.02	+1.04	+1.08	+1.08	+0.96	+0.90	+0.82	+0.71
T 80	+0.85	+0.88	+1.02	+1.04	+1.05	+1.07	+1.11	+1.11	+0.99	+0.93	+0.85	+0.73
T 40	+0.88	+0.87	+1.05	+1.07	+1.08	+1.10	+1.14	+1.14	+1.01	+0.96	+0.88	+0.76
T 20	+0.89	+0.79	+1.05	+1.08	+1.09	+1.11	+1.15	+1.15	+1.02	+0.97	+0.89	+0.77
T 9	+0.87	+0.84	+1.05	+1.07	+1.09	+1.11	+1.15	+1.15	+1.02	+0.97	+0.88	+0.76
T 2	+0.87	+0.80	+1.00	+1.06	+1.07	+1.09	+1.13	+1.13	+1.00	+0.95	+0.87	+0.75
CT200	*	*	*	*	*	*	*	*	*	*	*	*
C1 20	+0.00	-0.02	+0.00	-0.00	-0.00	-0.00	-0.00	-0.00	+0.01	-0.00	+0.00	-0.00

251173

251173

251173

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	297	319	298	296	291	302	294	326	332	317	314	297
D 80	292	311	291	287	291	297	281	327	339	322	319	286
D 10	292	315	290	278	297	285	267	325	341	326	320	281
F200	123	136	117	106	091	102	112	094	095	106	113	123
F160Z0	xxx											
F120Z0	xxx											
F 80	098	080	092	076	050	066	076	074	067	065	075	088
F 40Z0	xxx											
F 20Z0	xxx											
F 10	053	045	057	038	028	030	032	039	036	055	045	047
F 2	xxx											
T200	+035	+027	+027	+027	+031	+034	+022	+009	+002	+002	+017	+022
T160	+029	+029	+029	+029	+034	+027	+033	+036	+024	+011	+004	+018
T120	+041	+031	+032	+035	+027	+034	+037	+026	+013	+006	+006	+023
T 80	+043	+033	+033	+034	+027	+034	+037	+028	+019	+009	+008	+023
T 40	+042	+034	+034	+032	+028	+033	+032	+028	+028	+010	+014	+028
T 20	+040	+034	+034	+030	+027	+031	+029	+027	+021	+022	+020	+024
T 9	+039	+033	+034	+029	+025	+029	+026	+026	+019	+013	+011	+014
T 2	+035	+030	+031	+025	+019	+021	+018	+024	+020	+015	+011	+012
CT200	+000	-030	+001	+000	+000	+000	-001	+000	+000	+000	+000	-002
CT 20	-000	-000	-000	-000	+000	-000	-000	+000	+006	+010	+008	-000

261173

261173

261173

271173

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03													
D 200	313	320	316	320	316	324	323	340	307	308	316	322	332	322	315	319	304	305	302	314	309	321	307	312	
D 80	302	313	315	318	311	318	313	330	272	277	300	317	330	325	306	317	293	293	288	311	301	317	291	294	
D 10	298	317	309	314	307	311	299	309	231	249	291	311	338	321	289	308	290	291	284	306	296	315	282	282	
F 200	122	136	126	119	105	093	083	063	044	059	093	126	108	112	111	114	120	128	128	124	103	105	086	082	
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 80	092	105	089	094	079	069	058	048	025	052	067	104	084	067	065	086	094	101	094	097	081	087	063	062	
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
F 10	055	062	040	052	047	043	037	027	023	030	042	042	052	036	033	047	054	060	053	066	047	063	045	040	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
T 200	+023	+016	+019	+013	+010	+008	+001	+003	+009	+014	+023	+008	+004	+003	+001	+008	+006	+007	+002	+001	-011	-011	-010	-010	
T160	+026	+018	+021	+016	+013	+012	+011	+004	+009	+012	+025	+011	+005	+008	+004	+000	+009	+007	+009	+001	+004	-009	-009	-007	-007
T120	+028	+020	+023	+018	+016	+015	+013	+005	+009	+017	+026	+014	+008	+005	+002	+011	+008	+010	+004	+006	-006	-007	-007	-004	
T 80	+029	+021	+023	+021	+018	+017	+013	+002	+003	+005	+017	+010	+010	+009	+013	+001	+011	+009	+010	+004	+008	-003	-006	-002	-002
T 40	+029	+023	+020	+022	+020	+019	+016	+004	+005	+007	+017	+016	+012	+009	+002	+001	+011	+009	+010	+004	+008	-003	-006	-002	-002
T 20	+028	+023	+018	+021	+020	+020	+016	+010	+011	+014	+030	+015	+013	+009	+002	+002	+011	+011	+010	+010	+008	+019	-001	-004	-004
T 9	+027	+022	+016	+020	+020	+020	+016	+005	+005	+013	+000	+004	+002	+004	+002	+001	+011	+010	+008	+009	+000	-003	+001	-004	-004
T 2	+025	+020	+012	+017	+018	+019	+015	+005	+002	+003	+012	+000	+006	+006	+004	+004	+015	+001	+002	+000	-001	-001	-002	-005	-003
CT200	+000	+000	+000	+000	+000	+001	+003	+005	+009	+014	+018	+008	+000	+000	+005	-013	+000	+000	+001	+002	-000	+000	+000	+000	+000
CT 20	-000	-000	-000	-000	-000	-000	+001	+005	+006	+008	+020	+009	-000	-000	-006	-002	+006	-000	-000	+004	+010	+001	-000	+000	+000

271173

271173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15														
305	310	316	304	306	309	314	311	315	311	306	301	297	304	xxx	306	312	338	319	300	312	317	303	295	0200	
290	303	315	280	280	282	304	304	298	300	303	293	286	297	296	309	339	318	281	295	313	295	273	0 80		
286	299	313	277	268	261	288	301	289	287	304	293	298	306	310	339	315	276	280	307	296	270	0 10			
085	113	106	092	095	098	116	137	120	129	155	135	130	141	xxx	132	158	172	113	123	120	151	143	134	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F120Z0												
068	036	072	064	074	044	102	075	087	133	105	100	118	104	098	123	147	070	082	095	114	121	102	F 80		
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
043	057	055	046	035	041	042	065	039	047	089	068	065	081	062	052	079	103	042	045	057	071	083	045	F 10	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 2												
-009	-004	-008	-004	-002	+005	+005	+002	+004	+004	-000	-003	+001	+001	+001	+008	+015	+020	+008	+017	+027	+011	+012	-020	-020	
-007	-006	-005	-004	+001	+006	+007	+003	+005	-002	+003	+003	+009	+017	+022	+010	+005	+011	+029	+013	+010	T 160				
-005	-003	-002	-001	+001	+006	+008	+004	+005	-001	+006	+001	+005	+005	+010	+019	+024	+013	+002	+005	+004	+029	+016	+009	T 120	
-002	+001	+001	+001	+001	+005	+005	+003	-003	-001	+009	+001	+008	+008	+003	+008	+026	+015	+002	+001	+005	+025	+019	+010	T 80	
+000	+001	+004	+001	-000	+006	+005	+007	+001	+006	+002	+002	+002	+004	+004	+004	+024	+017	+001	+002	+006	+022	+021	+011	T 40	
+002	+002	+005	+001	-002	+002	+004	+007	+003	-007	+000	+002	+002	+002	+009	+005	+004	+024	+017	+001	+002	+006	+024	+022	+012	T 20
+003	+001	+006	+002	-003	+003	+003	+006	+002	-007	+002	+002	+002	+003	+004	+004	+016	+015	+000	+003	+007	+007	+012	+013	T 9	
-003	-001	-001	-001	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	T 2	
+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT200	
+000	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20	

271173

271173

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	717	315	302	325	328	323	318	321	316	322	319	307	327	329	348	317	314	317	316	314	313	313	313	
D 80	704	314	288	328	322	317	300	314	310	304	313	311	302	322	320	350	319	300	302	296	305	299	295	
D 10	303	305	275	320	286	300	298	299	296	303	317	309	348	322	300	300	287	271	275	292	296	249	249	
F 200	114	120	113	157	112	111	101	099	095	122	129	114	099	100	117	118	125	123	118	114	112	107	111	101
F160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F160Z0											
F120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F120Z0											
F 80	088	085	084	128	045	081	072	070	065	084	097	085	086	075	090	084	094	092	087	082	076	048	062	067
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0											
F 10	053	045	045	089	047	049	045	042	031	035	045	051	047											

281173

281173

291173

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	230 226	226 224	231 230	232 227	226 225	222 219	214 214	211 204	205 207	210 211	213 215	230 253
D 80	224 219	213 217	224 223	227 223	220 221	217 212	208 206	203 196	193 198	199 198	197 199	213 240
D 10	213 222	214 217	226 224	230 227	224 219	214 211	208 207	199 200	199 200	202 200	199 200	220 251
F 200	087 129	132 137	146 142	137 135	133 125	122 112	108 105	095 093	093 090	084 069	064 061	050 046
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	060 096	100 108	114 116	109 101	102 100	096 086	090 080	076 074	079 069	066 054	052 050	039 029
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	036 061	063 069	078 076	069 063	069 064	057 062	054 049	048 041	043 039	032 029	029 021	016 000
F 2	xxx xxx											
T 200	*003 +006	+010 +017	+010 +006	+002 +004	+000 -002	-004 -006	-014 -017	-016 -015	-015 -014	-013 -013	-013 -013	-012 -013
T 160	+005 +005	+006 +014	+011 +007	+004 +006	+002 +000	-002 -004	-011 -015	-013 -013	-013 -012	-012 -012	-011 -011	-011 -011
T 120	+007 +006	+005 +011	+014 +004	+001 +007	+005 +003	+001 -001	-008 -012	-011 -011	-010 -010	-010 -010	-009 -009	-009 -009
T 80	+009 +008	+007 +013	+016 +005	+001 -000	-005 -003	-001 -000	-005 -009	-008 -008	-008 -008	-007 -007	-007 -007	-007 -007
T 40	+011 +009	+008 +011	+018 +006	+003 +002	+003 +009	+007 +005	-002 -006	-005 -005	-005 -005	-005 -005	-005 -005	-005 -005
T 20	+011 +010	+009 +013	+019 +007	+004 +000	+002 +010	+008 +006	+000 -005	-004 -003	-003 -003	-003 -003	-003 -003	-003 -003
T 9	+011 +010	-009 +014	+018 +007	+004 -000	+002 +009	+008 +007	+001 -004	-003 -003	-003 -003	-002 -002	-002 -002	-002 -002
T 2	+010 +009	-009 +010	+011 +006	+004 +000	-001 +002	+008 +006	+001 -003	-002 -002	-002 -002	-002 -002	-003 -003	-003 -003
CT 20.0	+000 +002	-006 +010	+002 +001	+000 +001	+001 +001	+001 +001	+001 -000	-000 -000	-000 -000	+000 +000	-000 -000	-000 +000
CT 20	-000 -000	-001 +001	-000 +000	-000 -000	+001 -001	+001 +000	+001 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

291173

291173

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
280 512	741 343	336 338	345 339	344 350	347 354	357 001	355 354	352 346	351 352	349 351	356 349
2/9 313	313 320	322 316	324 322	323 336	342 344	350 354	347 343	339 336	344 345	346 352	349 346
2/9 319	319 326	328 323	327 326	327 332	337 342	350 350	342 338	335 333	334 335	337 350	344 340
046 054	059 062	071 083	078 086	124 131	125 137	138 123	112 107	102 088	079 092	094 098	092 080
xxx xxx											
xxx xxx											
028 031	037 035	035 049	057 077	086 092	091 097	099 089	084 081	079 073	058 067	072 086	072 063
xxx xxx											
xxx xxx											
015 013	015 013	014 022	027 033	044 044	049 059	058 054	050 045	042 035	039 043	054 044	034 024
xxx xxx											
-013 -007	-000 +004	+001 -001	+008 +007	+008 +016	+017 +007	+002 +001	+005 +007	+007 +002	+001 +004	+002 +000	-005 -006
-011 -010	-006 -002	+002 +002	+002 +007	+007 +005	+001 +012	+017 +008	+002 +003	+003 +006	+008 +005	+004 +007	+006 +003
-009 -008	-006 -006	-001 +000	+003 +008	+004 +004	+001 +010	+017 +009	+004 +005	+005 +007	+007 +009	+008 +006	+000 -000
-007 -006	-006 -003	-001 +000	+002 +005	+005 +001	+001 +006	+011 +010	+006 +008	+009 +010	+009 +011	+009 +009	+003 +002
-005 -005	-005 -005	-003 -002	+010 -001	-001 +005	+001 +004	+005 +002	+002 +003	+003 +009	+010 +011	+011 +013	+012 +011
-003 -004	-004 -009	-012 -006	-002 -002	+005 +001	+000 +010	+012 +009	+002 +010	+010 +010	+012 +012	+011 +013	+012 +012
-003 -003	-005 -005	-011 -016	-009 -009	-004 -009	-000 -000	+002 +003	+003 -000	+002 +002	+002 +010	+012 +012	+004 +003
-002 -003	-003 -021	-019 -014	-008 -013	-001 -002	-000 -000	+002 -001	+001 +002	+001 +003	+007 +010	+011 +011	+002 -001
*	*	*	*	*	*	*	*	*	*	*	*
+000 +000	+000 +000	-001 +000	+000 +000	-000 +000	+000 +000	+001 +007	+005 -001	-001 -000	-000 -000	-000 -000	-000 -000
-000 -000	-000 -000	-000 -000	+000 +000	+000 +000	+001 +001	+013 +009	+002 +005	+007 +007	+001 +001	+000 +000	-000 -000
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

291173

291173

301173

CABAUV

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	368 355	347 358	342 344	344 354	349 339	331 302	278 265	254 259	261 274	294 309	309 303	352 306
D 80	349 344	335 348	319 331	329 336	324 319	317 286	270 258	242 244	244 257	286 285	285 286	334 311
D 10	339 326	321 332	322 318	314 315	283 276	266 250	231 209	228 233	238 264	298 266	247 261	318 303
F 200	071 077	063 067	065 061	059 061	047 041	033 039	051 044	064 087	112 096	084 076	059 049	050 061
F 160Z0	xxx xxx											
F 120Z0	xxx xxx											
F 80	058 060	064 058	056 061	061 055	051 047	042 052	062 047	072 089	104 070	070 052	068 066	089 042
F 40Z0	xxx xxx											
F 20Z0	xxx xxx											
F 10	024 028	030 028	027 028	026 022	019 016	015 030	031 023	037 035	051 051	028 040	040 040	027 009
F 2	xxx xxx											
T 200	-007 -007	-011 -011	-009 -009	-004 -004	-003 -003	-003 -000	-001 -001	+002 +002	+007 +007	+008 +010	-001 -003	+010 -006
T 160	-004 -005	-009 -009	-017 -005	-003 -003	+001 -001	-001 -000	-000 -000	-001 -001	-000 -000	-001 -001	-003 -003	-005 -006
T 120	-001 -003	-006 -006	-005 -003	-002 -002	+002 -001	+001 -000	+003 -000	+008 -008	+009 -010	+010 -011	-003 -003	-015 -015
T 80	+001 -001	-004 -004	-003 -001	-002 -002	+001 -000	+003 -000	+006 -006	+008 -008	+015 -015	+010 -011	+007 -007	+009 -009
T 40	+001 -001	-003 -003	-006 -006	-016 -016	-004 -004	-003 -001	-010 -010	-010 -010	-005 -005	-005 -005	-002 -002	-002 -002
T 20	-001 -003	-005 -005	-011 -012	-017 -017	-019 -019	-019 -017	-012 -012	-020 -020	-017 -016	-021 -014	-004 -004	-003 -003
T 9	-003 -004	-007 -007	-014 -015	-024 -024	-025 -025	-027 -030	-031 -031	-025 -025	-030 -023	-014 -014	-002 -002	-003 -003
T 2	-009 -006	-012 -012	-021 -021	-034 -034	-036 -053	-060 -060	-063 -044	-047 -040	-040 -032	-023 -023	-003 -005	-016 -016
CT 200	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03

<tbl\_r cells="13" ix="1" maxcspan="1

301173

3.2.1.4.7.2

011273

011273

GMT	011273												021273		CABA UW									
	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
D 200	205	194	161	102	106	091	079	075	067	070	076	073	070	063	060	058	060	048	039	032	024	022	018	017
D 80	195	175	144	095	105	099	073	076	074	077	089	075	050	035	037	043	048	060	065	060	040	020	013	004
D 10	190	164	139	094	105	094	062	068	057	072	090	031	003	009	003	010	014	014	008	342	330	320	321	332
F 200	066	051	042	054	054	050	064	069	072	070	067	064	057	063	068	063	066	064	060	050	046	049	051	054
F 160Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
F 120Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
F 80	052	041	039	058	059	047	063	056	051	043	040	032	026	030	033	040	056	058	051	045	039	041	045	046
F 40Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
F 20Z0	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
F 10	034	033	031	039	038	025	033	028	023	017	013	011	013	006	011	014	015	014	010	011	015	009	006	007
F 2	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
T 200	-039	-040	-041	-044	-046	-043	-048	-047	-042	-036	-037	-038	-038	-037	-035	-037	-040	-038	-039	-040	-040	-039	-040	
T 160	-037	-038	-039	-042	-044	-040	-048	-048	-044	-038	-035	-038	-038	-038	-036	-038	-039	-038	-037	-037	-037	-036	-036	
T 120	-033	-034	-035	-040	-043	-040	-046	-046	-045	-044	-039	-040	-039	-037	-037	-038	-040	-038	-037	-038	-036	-034	-033	
T 80	-029	-030	-031	-036	-041	-040	-044	-044	-044	-045	-044	-043	-044	-041	-039	-038	-043	-042	-040	-040	-037	-035	-034	-033
T 40	-026	-027	-027	-032	-038	-039	-043	-042	-044	-044	-045	-046	-045	-046	-048	-048	-083	-083	-058	-061	-065	-062	-054	-054
T 20	-024	-025	-025	-030	-036	-038	-042	-041	-046	-045	-046	-048	-049	-072	-083	-096	-101	-103	-106	-116	-117	-115	-113	-098
T 9	-027	-028	-027	-032	-037	-040	-043	-043	-047	-047	-048	-053	-079	-101	-097	-098	-101	-102	-108	-118	-118	-120	-124	-123
T 2	-026	-027	-027	-031	-037	-041	-044	-044	-048	-051	-054	-076	-099	-104	-099	-098	-100	-101	-108	-119	-119	-122	-129	-129
C 1200	-000	+000	+000	+000	+000	+000	+000	+000	+001	+000	+000	+001	+000	+000	+000	+000	+000	-000	+000	+000	+000	+000	+000	+000
CT 20	+000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	+001	+001	+001	+000	+000	+001	+001	+002	+002	+002	+002	+002

021273

021273

021273

031273

SARAHUM

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	274	275	258	246	246	237	234	236	235	235	238	243
D 80	227	231	226	220	218	212	208	205	207	207	208	239
D 10	194	186	195	188	197	195	196	197	200	203	202	215
F 200	040	038	052	060	065	071	088	096	114	130	138	238
F 160Z0	xxx	145	232									
F 120Z0	xxx	145	229									
F 80	039	046	053	062	074	082	079	083	088	092	088	225
F 40Z0	xxx	093	212									
F 20Z0	xxx	090	213									
F 10	011	016	021	025	013	038	038	043	046	049	044	213
F 2	xxx	047	213									
T 200	-018	-016	-013	-013	-009	-006	-008	-003	-002	-003	-001	-001
T 160	-018	-014	-011	-013	-012	-006	-008	-006	-003	-004	-003	-008
T 120	-019	-014	-013	-018	-019	-012	-014	-026	-025	-034	-036	-005
T 80	-019	-017	-018	-023	-031	-034	-041	-047	-051	-053	-049	-029
T 40	-029	-043	-049	-053	-050	-046	-045	-048	-052	-054	-050	-025
T 20	-062	-059	-063	-058	-051	-046	-045	-048	-051	-054	-050	-046
T 2	-063	-061	-068	-063	-053	-047	-046	-048	-051	-053	-050	-047
CT 200	+000	+000	+000	+000	-000	+000	+000	+000	+000	+000	+000	+000
CT 20	+000	+000	+000	+000	-000	+000	-000	-000	+000	+000	+000	+000

031273

031273

031273

031273

041273

CARBAUW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	238	240	244	252	262	260	262	264	260	256	259	260
D 80	216	217	219	223	219	222	225	221	221	226	232	238
D 10	219	220	222	225	225	218	222	222	218	220	225	228
F 200	125	127	127	118	108	103	117	120	129	132	141	152
F 160Z0	xxx	157										
F 120Z0	xxx											
F 80	101	100	096	093	098	084	091	097	098	105	120	117
F 40Z0	xxx											
F 20Z0	xxx											
F 10	063	065	061	058	061	056	047	046	051	048	058	069
F 2	xxx											
T 200	*029	+031	-032	+039	+048	+052	+053	+057	+057	+056	+061	+064
T 160	+015	+016	+018	+025	+038	+042	+042	+052	+048	+043	+052	+061
T 120	+011	+012	+013	+014	+025	+032	+028	+038	+034	+031	+039	+052
T 80	+010	+011	+012	+013	+016	+019	+019	+025	+025	+026	+030	+038
T 40	+011	+012	+012	+013	+015	+016	+017	+017	+021	+022	+024	+026
T 20	+011	+012	+012	+013	+014	+016	+016	+016	+019	+020	+022	+024
T 9	+011	+012	+012	+012	+014	+016	+015	+018	+019	+021	+023	+025
T 2	+010	+011	-011	+011	+013	+015	+014	+016	+017	+019	+020	+023
CT 200	+000	+000	-000	+000	+000	+000	+000	+000	+000	+000	+002	+004
CT 20	-000	-000	-000	-000	-001	-000	+000	+000	-000	-000	-000	-000

041273

041273

041273

GMT	041273												051273			CABA UW											
	15-16			16-17			17-18			18-19			19-20		20-21		21-22		22-23		23-24		00-01		01-02		02-03
D 200	291	285	285	294	306	297	293	288	288	294	300	304	304	311	312	312	316	322	317	314	315	316	317	322			
D 80	279	270	267	279	302	295	293	296	280	275	291	299	299	307	307	306	317	322	309	303	303	309	310	316			
D 10	273	262	262	276	308	294	292	289	258	241	284	301	301	308	308	306	318	322	308	294	293	300	306	306			
F 200	108	110	109	088	076	074	071	071	097	112	110	120	118	126	121	113	107	102	102	103	102	098	088	086			
F 160Z0	xxx																										
F 120Z0	xxx																										
F 80	080	088	097	073	062	062	056	061	051	064	082	091	091	095	086	081	089	077	063	063	064	071	066	061			
F 40Z0	xxx																										
F 20Z0	xxx																										
F 10	043	046	055	034	029	030	031	029	021	025	041	056	056	064	050	048	058	047	031	029	026	033	031	026			
F 2	xxx																										
T 200	+073	+074	+074	+072	+068	+054	+045	+050	+054	+073	+074	+075	+075	+075	+076	+076	+075	+073	+068	+068	+071	+074	+070	+071			
T 160	+076	+077	+077	+075	+072	+059	+046	+048	+062	+073	+075	+076	+077	+077	+077	+077	+077	+075	+070	+071	+068	+072	+073	+073			
T 120	+079	+079	+079	+077	+075	+064	+055	+055	+060	+072	+077	+078	+079	+078	+078	+078	+077	+072	+073	+073	+074	+075	+072	+069			
T 80	+080	+079	+079	+078	+077	+067	+067	+057	+055	+057	+077	+079	+080	+080	+080	+080	+079	+074	+074	+074	+071	+070	+069	+075			
T 40	+080	+076	+076	+076	+076	+067	+059	+055	+055	+065	+077	+082	+083	+083	+082	+081	+080	+076	+075	+073	+072	+073	+073	+072			
T 20	+079	+075	+075	+074	+073	+063	+058	+058	+055	+062	+076	+083	+084	+084	+083	+083	+082	+080	+076	+075	+073	+072	+072	+074			
T 9	+078	+075	+075	+072	+071	+062	+058	+055	+055	+060	+074	+080	+081	+082	+081	+081	+081	+077	+075	+073	+075	+075	+078	+074			
T 2	+076	+072	+073	+070	+068	+060	+057	+054	+054	+059	+074	+080	+081	+081	+081	+081	+081	+077	+074	+073	+073	+071	+072	+070			
CT 200	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *	* * * * *			
CT 20	+000	+000	+000	-000	-000	-002	-006	-006	-005	-000	+000	-000	-000	-000	-000	+000	+000	-000	-000	+000	+000	+000	+000	+000			

051273

051273

061273

061273

061273

061273

071273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	288	288	288	289	287	288	294	295	291	290	289	287
D 80	225	225	285	286	285	284	291	291	287	286	285	283
D 10	268	289	288	288	268	287	293	293	288	288	287	284
F200	176	177	178	176	181	165	163	158	156	169	161	150
F160Z0	xxx											
F120Z0	xxx											
F 80	154	151	153	150	156	139	135	131	126	142	132	11d
F 40Z0	xxx											
F 20Z0	xxx											
F 10	111	103	107	101	109	096	094	088	082	095	085	073
F 2	xxx											
T200	+057	+057	+055	+053	+051	+046	+054	+047	+046	+046	+045	+043
T160	+060	+060	+058	+056	+055	+060	+059	+050	+049	+048	+046	+042
T120	+064	+065	+062	+060	+058	+064	+062	+053	+052	+051	+049	+047
T 80	+066	+066	+064	+062	+061	+056	+056	+054	+054	+053	+050	+049
T 40	+069	+068	+066	+064	+063	+069	+066	+067	+055	+057	+054	+051
T 20	+069	+068	+066	+064	+063	+069	+067	+057	+056	+057	+055	+051
T 9	+069	+068	+066	+064	+063	+062	+067	+066	+057	+055	+056	+050
T 2	+067	+065	+063	+060	+060	+068	+064	+054	+052	+051	+049	+046
CT200	+000	+000	+000	+000	+000	+002	+007	+000	+000	+000	+000	+000
CT 20	-000	-000	-000	-000	-000	+010	+008	-000	-000	-000	-000	-000

071273

071273

081273

081273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
275	277	277	278	281	281	280	280	280	277	271	271
267	268	268	267	266	265	267	266	269	268	248	250
268	269	266	260	263	258	260	261	258	259	251	235
153	144	138	128	123	115	114	118	112	110	094	091
xxx											
xxx											
123	114	107	097	097	092	095	077	089	071	082	080
xxx											
xxx											
074	069	061	055	050	051	050	046	048	040	041	039
xxv	xxx										
*029	+028	+028	+028	+028	+029	+028	+028	+028	+028	+029	+028
+031	+031	+030	+029	+030	+031	+031	+030	+031	+031	+032	+033
+034	+033	+032	+031	+031	+031	+032	+032	+032	+033	+034	+035
+034	+035	+033	+031	+030	+030	+032	+032	+032	+033	+035	+035
+034	+035	+031	+029	+029	+027	+027	+026	+028	+028	+030	+030
+033	+035	+030	+028	+027	+025	+025	+024	+025	+028	+031	+037
+033	+035	+029	+027	+026	+024	+024	+023	+022	+025	+026	+026
+031	+032	+020	+024	+023	+020	+019	+017	+019	+018	+020	+024
*000	+000	+000	+000	+000	+000	+001	+000	+000	+000	+000	+000
*000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000

071273

071273

081273

CABA UW

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
D200	189	179	171	171	168	161	159	162	167	174	168
D 80	171	166	163	158	152	147	147	150	156	174	182
D 10	160	160	159	153	147	145	145	149	154	173	181
F200	086	091	096	099	098	107	122	125	122	132	128
F160Z0	xxx										
F120Z0	xxx										
F 80	062	064	070	069	076	090	094	093	103	091	101
F 40Z0	xxx										
F 20Z0	xxx										
F 10	035	038	042	043	047	058	063	064	071	060	061
F 2	xxx										
T200	+033	+032	-023	+024	+026	+028	+029	+032	+032	+030	+031
T160	+034	+033	-024	+026	+027	+028	+030	+032	+033	+030	+032
T120	+036	+035	-026	+027	+029	+030	+032	+034	+037	+029	+031
T 80	+039	+038	-033	+032	+033	+035	+036	+038	+042	+040	+041
T 40	+041	+040	-030	+031	+032	+033	+035	+038	+040	+043	+041
T 20	+042	+041	-031	+032	+033	+034	+036	+039	+041	+044	+041
T 9	+042	+041	-034	+032	+034	+035	+037	+041	+044	+046	+043
T 2	+042	+041	-035	+034	+035	+037	+040	+042	+045	+046	+043
CT200	-000	+000	-003	-003	-002	-002	-001	+000	+000	+000	+000
CT 20	-001	-001	-007	-004	-003	-002	-000	-000	-000	-000	-000

081273

081273

081273

CABA UW

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
242	252	265	258	248	254	245	252	248	254	250	261
240	237	262	255	243	251	240	245	246	242	243	241
245	250	259	248	255	249	240	247	248	242	238	255
154	152	134	130	137	119	133	116	103	091	113	112
xxx											
xxx											
125	130	124	105	106	112	094	104	081	073	086	084
xxx											
xxx											
096	074	090	074	080	081	068	073	062	053	049	061
xxx											
*072	+063	+063	+063	+059	+056	+057	+054	+049	+040	+038	+035
*074	+065	+058	+058	+062	+059	+060	+058	+057	+050	+042	+041
*076	+068	+062	+070	+066	+062	+063	+061	+060	+053	+045	+044
*079	+070	+064	+073	+069	+065	+066	+064	+063	+056	+047	+046
*081	+072	+065	+070	+068	+068	+065	+061	+060	+049	+045	+044
*082	+074	+066	+075	+077	+069	+067	+066	+061	+051	+047	+046
*082	+074	+067	+075	+077	+073	+069	+067	+065	+061	+051	+047
*082	+075	+067	+072	+071	+067	+067	+065	+064	+060	+038	+030
*000	-000	-003	-001	+000	+000	+000	+000	+000	-000	-000	-003
*000	-000	-001	-003	-000	-000	-000	-000	-000	-000	-000	-004

081273

CABA UW

081273

081273

031273

SABA-1M

091273

081377

091273

091273

101233

2000

WT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D200	146	195	196	190	185	172	175	169	162	161	158	157
D 80	173	181	184	183	176	170	169	170	163	162	158	157
D 10	167	179	178	175	164	158	160	156	150	154	152	154
F200	022	022	023	024	023	026	028	023	031	036	047	049
F160Z0	xxx											
F120Z0	xxx											
F 80	124	022	024	031	035	039	041	035	034	043	051	065
F 40Z0	xxx											
F 20Z0	xxx											
F 10	014	015	011	015	016	022	022	020	018	023	028	034
F 2	xx*	xxx										
F200	+004	+004	+005	+004	+006	+007	+006	+006	+004	+003	+000	-002
F 60	+007	+007	+007	+006	+017	+007	+007	+009	+008	+007	+006	+003
F20	+011	+011	+010	+009	+009	+009	+009	+010	+011	+008	+004	+002
F 40	+014	+014	+013	+012	+012	+011	+011	+012	+012	+010	+004	+002
F 20	+017	+014	+015	+014	+013	+012	+012	+012	+011	+007	+003	+001
F 10	+018	+015	+012	+010	+008	+007	+004	+003	+001	-002	-005	-006
F 2	+017	+013	+009	+007	+005	+003	+001	+001	-002	-005	-008	-010
CT200	+011	+002	-005	-007	-005	-007	-010	-009	-012	-016	-026	-029
CT 20	+000	-000	+000	+000	+000	+000	+000	+000	+000	-000	-000	-000

101275

101273

101273

101273

111273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	198	197	196	201	204	210	208	206	207	211	216	215
D 80	189	185	182	184	185	194	191	193	196	199	203	200
D 10	179	174	173	171	175	183	180	185	197	200	203	201
F 200	098	107	112	123	128	132	139	146	139	140	138	140
F 160Z0	XXX											
F 120Z0	XXX											
F 80	073	081	088	091	092	093	094	095	096	098	095	094
F 40Z0	XXX											
F 20Z0	XXX											
F 10	037	041	042	043	046	045	047	052	055	054	056	052
F 2	XXX											
-200	-012	-013	-012	-007	-007	-006	-006	-006	-011	-011	-010	-008
-160	-010	-011	-011	-007	-008	-009	-010	-012	-013	-014	-012	-011
-120	-008	-010	-008	-009	-010	-012	-013	-013	-014	-013	-012	-014
-80	-006	-007	-010	-010	-011	-012	-014	-012	-013	-014	-013	-012
-40	-015	-010	-012	-014	-015	-016	-016	-014	-011	-013	-012	-015
20	-015	-010	-013	-014	-015	-016	-016	-013	-011	-012	-012	-013
9	-016	-011	-013	-015	-016	-017	-017	-014	-011	-012	-012	-014
2	-010	-014	-016	-018	-020	-019	-016	-013	-014	-014	-016	-018
C 200	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
C 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

111273

111273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
209	208	209	209	211	210	211	213	211	210	211	213
192	199	198	198	200	201	204	203	203	208	209	208
200	203	202	201	202	205	206	205	212	213	211	216
141	139	147	151	153	159	161	159	158	163	156	165
XXX											
XXX											
102	101	111	110	116	118	119	115	117	120	118	123
XXX											
XXX											
002	062	069	067	072	076	072	074	077	078	082	087
XXX											
-013	-018	-016	-013	-009	-007	-005	-002	+000	+002	+002	+001
-018	-018	-016	-014	-009	-007	-006	-001	+003	+002	+001	+006
-016	-017	-015	-014	-009	-007	-006	-001	+001	+001	+001	+006
-015	-015	-013	-013	-009	-007	-006	-001	+004	+004	+002	+007
-013	-013	-011	-010	-007	-004	-002	-001	+006	+006	+005	+009
-013	-011	-010	-009	-006	-002	-000	-002	+007	+012	+006	+005
-013	-011	-010	-009	-006	-002	-000	-002	+007	+012	+007	+005
-014	-012	-010	-009	-006	-003	-000	+002	+007	+011	+007	+005
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

111273

111273

CABA UW

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
D 200	265	252	261	271	279	279	276	278	277	275	273
D 80	227	227	230	232	234	234	238	239	243	251	252
D 10	231	231	233	233	229	229	227	225	226	226	227
F 200	098	107	103	100	045	023	097	107	115	121	129
F 160Z0	XXX										
F 120Z0	XXX										
F 80	094	093	097	095	086	082	087	086	098	097	099
F 40Z0	XXX										
F 20Z0	XXX										
F 10	050	060	046	062	058	056	049	048	046	049	048
F 2	XXX										
T 200	+042	+035	+042	+043	+046	+047	+048	+051	+052	+049	+050
T 160	+036	+023	+030	+034	+042	+047	+050	+053	+054	+051	+052
T 120	+024	+021	+022	+025	+027	+038	+049	+051	+053	+052	+054
T 80	+021	+021	+021	+021	+020	+019	+026	+029	+034	+043	+045
T 40	+021	+022	+022	+023	+020	+016	+015	+019	+020	+017	+020
T 20	+022	+023	+022	+023	+020	+017	+014	+018	+012	+012	+014
T 9	+021	+022	+022	+022	+020	+016	+013	+017	+018	+013	+012
T 2	+021	+022	+020	+019	+017	+016	+011	+013	+014	+008	+007
C 200	+000	+000	+002	+006	+007	+000	+000	+004	+005	+001	+000
C 20	-000	-001	-000	-000	-000	-000	-000	-000	-000	-001	-000

121273

121273

CABA UW

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
268	268	266	264	265	262	264	265	262	259	254	257
245	243	242	245	243	244	243	231	223	224	229	226
228	221	222	223	227	228	226	229	211	213	218	225
111	109	114	110	114	108	111	100	096	094	098	103
XXX											
XXX											
068	081	070	089	088	087	082	076	070	083	091	084
XXX											
XXX											
040	040	039	039	045	047	045	045	038	031	040	050
XXX											
+047	+045	+046	+047	+046	+046	+045	+045	+043	+044	+044	+045
+048	+047	+047	+049	+048	+047	+048	+048	+045	+047	+046	+047
+050	+049	+048	+052	+050	+049	+047	+046	+041	+032	+037	+034
+038	+039	+043	+039	+037	+039	+034	+034	+032	+031	+034	+036
+028	+033	+032	+034	+030	+027	+028	+034	+028	+024	+025	+030
+021	+023	+023	+027	+024	+027	+026	+025	+021	+023	+028	+032
+016	+020	+019	+022	+022	+021	+023	+023	+019	+022	+027	+028
+011	+016	+015	+019	+019	+018	+020	+019	+014	+020	+025	+027
+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000

CT200

CT 20

121273

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	CABA UW												
D 200	220	217	215	217	221	223	222	222	223	224	224	221	226	230	239	239	243	248	253	256	258	259	260	
D 80	212	208	206	211	216	218	217	218	219	220	221	220	217	222	224	233	234	236	242	246	249	252	253	254
D 10	214	212	210	215	220	223	221	222	224	225	226	224	222	226	229	236	237	238	246	251	251	256	258	257
F 200	142	147	138	147	155	157	167	171	184	186	191	190	184	181	178	184	173	172	162	157	157	165	168	166
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 80	110	113	116	116	115	125	134	141	146	149	156	149	143	149	142	145	135	135	124	117	115	127	128	127
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 10	073	074	076	078	079	089	094	105	106	109	110	110	101	105	104	106	101	090	090	081	086	090	090	089
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
T 200	+029	+026	+025	+025	+028	+029	+031	+035	+036	+035	+035	+035	+037	+040	+044	+049	+052	+053	+054	+057	+067	+066	+067	+067
T 160	+030	+027	+027	+026	+030	+031	+033	+037	+038	+037	+037	+039	+042	+045	+051	+053	+054	+055	+057	+064	+068	+070	+069	+069
T 120	+032	+029	+029	+028	+032	+034	+036	+041	+040	+038	+039	+041	+044	+047	+053	+055	+056	+057	+064	+072	+072	+073	+072	+072
T 80	+034	+031	+031	+031	+034	+037	+039	+042	+042	+040	+041	+041	+043	+046	+048	+050	+056	+058	+059	+061	+064	+073	+074	+074
T 40	+036	+033	+034	+034	+034	+037	+040	+042	+046	+045	+043	+043	+045	+048	+050	+056	+058	+059	+061	+062	+072	+077	+076	+077
T 20	+037	+034	+035	+035	+038	+041	+043	+047	+045	+043	+044	+044	+045	+048	+051	+056	+059	+061	+061	+062	+075	+078	+077	+077
T 2	+036	+034	+035	+035	+038	+040	+043	+047	+045	+045	+044	+044	+045	+048	+051	+056	+059	+061	+061	+062	+073	+078	+076	+077
CT 200	+000	-000	-000	-000	+000	+000	+000	+000	+000	+000	+000	+000	*	*	*	*	*	*	*	*	*	*	*	*
CT 20	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	

131273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	131273											
208	271	281	281	283	284	282	283	284	283	281	286	282	277	278	278	279	278	278	278	278	278	D 200	
205	267	277	277	279	280	278	280	279	280	277	276	276	271	274	274	274	277	276	277	275	277	D 80	
208	270	280	279	281	283	282	283	280	283	281	279	283	282	277	278	278	281	280	281	279	280	D 10	
175	169	172	172	170	166	170	168	164	165	161	157	154	156	167	172	171	178	185	184	178	183	186	191
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
140	139	137	136	135	139	140	140	143	136	136	133	130	127	130	139	146	144	154	163	156	153	159	160
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
094	095	091	089	089	096	093	099	096	094	091	090	090	096	100	105	100	107	116	113	109	111	116	113
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx												
*067	+067	+064	+062	+061	+061	+062	+060	+058	+059	+057	+056	+056	+058	+058	+059	+059	+059	+059	+060	+061	+061	+062	+061
+070	+070	+067	+065	+064	+064	+065	+063	+062	+062	+060	+059	+060	+061	+068	+069	+069	+062	+063	+062	+063	+064	+064	+064
+073	+073	+071	+069	+067	+067	+068	+067	+065	+065	+064	+063	+064	+065	+072	+073	+073	+065	+065	+066	+066	+067	+068	+068
+076	+076	+073	+070	+069	+069	+067	+068	+066	+066	+065	+066	+066	+068	+068	+068	+068	+069	+069	+070	+069	+070	+070	+070
+078	+079	+076	+071	+070	+072	+072	+073	+070	+069	+069	+067	+068	+070	+078	+079	+071	+072	+073	+072	+073	+073	+073	+073
+080	+079	+075	+070	+069	+071	+073	+073	+072	+070	+070	+069	+068	+069	+069	+072	+070	+074	+074	+074	+074	+074	+074	+074
+082	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+084	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+086	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+088	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+090	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+092	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+094	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+096	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+098	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+100	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+102	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+104	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+106	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+108	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+110	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+112	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+114	+077	+073	+068	+067	+069	+071	+070	+068	+068	+067	+067	+067	+071	+069	+071	+072	+072	+072	+072	+073	+073	+073	+073
+116	+077	+073	+068	+067																			

141273

141273

151273

CABA UW

GMT	15-16	15-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03														
D 200	312	303	296	304	303	011	352	342	338	328	323	319	317	311	306	314	312	310	306	308	309	310	313	337		
D 80	319	299	293	306	305	011	343	327	328	323	321	319	305	294	296	300	303	301	303	304	305	307	343			
D 10	311	302	296	305	303	007	338	320	322	314	319	322	321	307	292	289	293	301	302	304	306	305	305	346		
F 200	175	178	168	146	146	130	119	129	153	149	142	161	150	140	134	146	159	170	186	183	183	189	163			
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx														
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx														
F 80	154	152	139	121	125	098	093	097	108	101	103	128	115	107	093	106	120	135	145	149	144	150	134			
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx														
F 20Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx														
F 10	118	110	095	083	04	058	052	054	057	046	050	082	087	076	066	054	060	078	089	101	107	099	103	091		
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx														
F 200	+014	+014	+003	+008	+006	+003	+012	+016	+024	+030	+033	+019	+012	+003	+004	+014	+023	+024	+026	+024	+028	+030	+013			
T 160	+017	+017	+011	+010	+019	+000	+013	+016	+023	+030	+031	+022	+015	+005	+006	+015	+024	+026	+026	+028	+027	+030	+033			
T 120	+020	+020	+013	+012	+012	+003	+013	+015	+023	+030	+032	+024	+018	+008	+008	+016	+025	+029	+028	+031	+030	+032	+035	+017		
T 80	+023	+023	+016	+014	+014	+010	+017	+014	+021	+028	+032	+024	+020	+010	+009	+016	+026	+030	+030	+033	+034	+037	+018			
T 40	+026	+026	+019	+016	+017	+007	+009	+013	+018	+024	+029	+027	+022	+012	+011	+015	+024	+031	+031	+034	+035	+039	+021			
T 20	+026	+026	+020	+017	+018	+010	+015	+013	+017	+021	+026	+027	+023	+013	+011	+014	+014	+022	+030	+031	+035	+035	+039	+022		
T 2	+026	+026	+020	+019	+018	+009	+013	+012	+016	+019	+025	+027	+023	+013	+011	+014	+021	+029	+031	+035	+035	+038	+010			
C 120J	+003	+002	+003	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+001	+001	+001	+000	+000	+000	+000	+001	+000		
C 121	-001	-000	-000	-000	-000	-000	-004	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001	-001		

151273

151273

03-14	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15															
335	553	327	338	338	343	343	337	333	329	329	328	327	323	314	311	314	314	312	308	309	298	D 200				
334	536	330	339	339	341	334	331	331	320	322	314	315	315	314	329	309	309	308	308	302	303	292	D 80			
334	500	330	339	339	342	336	327	327	321	302	312	298	299	297	304	354	320	307	308	307	302	300	287	D 10		
195	159	159	177	155	155	131	127	135	117	117	107	095	082	044	066	100	096	093	098	095	088		F 200			
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80														
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0														
U 99	110	110	104	082	080	045	048	054	044	034	043	034	039	032	030	016	020	058	060	052	048	036	F 20			
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10														
+026	+024	+019	+013	+016	+018	+020	+018	+026	+024	+028	+028	+020	+030	+027	+030	+033	+032	+032	+034	+035	+034	+034	T 200			
+027	+026	+021	+015	+018	+020	+023	+019	+024	+025	+027	+029	+030	+033	+029	+033	+036	+036	+036	+037	+037	+037	+037	T 160			
+027	+026	+024	+019	+021	+023	+024	+020	+026	+025	+027	+029	+032	+034	+036	+032	+036	+036	+036	+037	+037	+037	+037	T 120			
+018	+029	+026	+021	+023	+025	+025	+021	+023	+024	+025	+028	+032	+034	+037	+034	+038	+043	+043	+043	+044	+043	+043	T 80			
+017	+028	+028	+024	+024	+026	+026	+021	+020	+020	+020	+020	+015	+015	+017	+021	+028	+032	+039	+043	+047	+047	+047	T 40			
+003	+029	+028	+025	+025	+025	+025	+020	+020	+019	+019	+019	+017	+017	+017	+020	+027	+032	+036	+040	+046	+046	+046	+045	T 20		
+008	+047	+023	+014	+024	+025	+024	+019	+020	+017	+017	+017	+020	+027	+027	+032	+039	+037	+041	+049	+048	+047	+047	+046	T 2		
+007	+015	+026	+011	+010	+022	+021	+016	+016	+012	+006	+013	+017	+025	+032	+039	+043	+049	+049	+047	+047	+047	+047	+043	T 2		
+004	+000	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200			
-005	-011	-000	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 20			

151273

151273

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03														
D 200	269	289	282	291	276	269	261	252	247	244	237	229	227	225	223	224	222	221	218	219	220	222				
D 80	275	275	247	292	270	250	242	236	232	233	229	224	222	221	217	219	217	219	219	220	215	215	218			
D 10	268	263	243	285	237	225	218	217	225	230	229	227	227	223	221	225	223	224	221	218	219	221	222			
F 200	065	089	105	093	0+2	091	093	100	117	127	131	138	146	145	150	160	160	168	169	169	172	174	190	189		
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0													
F 120Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80													
F 80	074	073	062	073	067	070	075	091	096	099	107	113	111	115	120	126	128	138	135	136	143	156	152			
F 40Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 20Z0													
F 10	038	040	051	051	025	032	036	036																		

161273

16127

171273

CABAUW

171273

171273

171<73

181275

18127

181223

101233

191275

191273

131273

181-25

201273

876

201273														
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15			
166 107	167 166	168 169	170 170	170 170	171 170	169 171	173 169	171 167	161 163	163 165	174 179	D 200		
150 131	131 130	134 133	133 135	135 137	139 141	142 143	145 141	143 139	136 139	140 141	147 153	D 80		
126 123	124 124	128 127	128 130	129 131	132 134	134 133	138 137	133 131	132 134	137 138	139 142	D 10		
165 165	167 168	168 172	172 173	176 177	179 184	189 193	196 203	194 186	174 175	180 174	167 168	164 F 200		
xxx xxx	F 160Z0													
xxx xxx	xxx xxx	xxx xx	xxx xxx	xxx xxx	xxx yyy	xxx xxx	F 120Z0							
109 114	111 109	113 116	113 114	110 109	107 109	110 112	116 113	102 102	103 107	104 104	098 104	113 F 80		
xxx xxx	F 4020													
053 057	051 053	057 060	057 059	060 055	054 054	053 053	051 058	058 049	051 054	059 057	051 048	050 F 2020		
xxx xxx	F 10													
+065 +068	+069 +070	+072 +074	+074 +076	+077 +077	+078 +082	+085 +089	+091 +100	+093 +096	+095 +094	+095 +095	+095 +095	+091 +099 +103 T 200		
+051 +057	+055 +055	+058 +061	+064 +064	+064 +060	+062 +063	+068 +075	+075 +075	+086 +080	+084 +083	+079 +080	+081 +080	+093 +093 +099 T 160		
+036 +040	+037 +035	+039 +043	+045 +045	+045 +039	+041 +045	+048 +055	+059 +059	+067 +065	+068 +069	+066 +069	+071 +072	+083 +092 T 120		
+022 +024	+022 +021	+024 +026	+028 +027	+027 +028	+031 +034	+041 +045	+052 +053	+058 +061	+061 +061	+064 +064	+067 +068	+073 +082 T 80		
+018 +018	+017 +017	+017 +019	+021 +021	+022 +023	+023 +023	+025 +026	+029 +034	+036 +045	+048 +053	+057 +059	+063 +066	+067 +068 +071 T 40		
+018 +017	+016 +016	+016 +019	+020 +020	+022 +023	+023 +023	+025 +028	+033 +036	+044 +048	+052 +057	+059 +063	+066 +066	+066 +066 +068 T 20		
+017 +016	+015 +015	+018 +020	+020 +021	+022 +022	+022 +025	+028 +032	+035 +044	+048 +052	+056 +059	+063 +066	+066 +066	+065 +067 T 9		
+016 +014	+013 +013	+013 +015	+018 +019	+020 +020	+020 +022	+026 +030	+033 +042	+046 +051	+055 +058	+062 +064	+064 +063	+064 +064 T 2		
+000 +000	+000 +000	+000 +001	+000 +000	+001 +001	+001 +000	+001 +001	+001 +001	+001 +001	+000 +000	+000 +000	+000 +000	+000 +000 +000 CT 200		
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000 -000		

201273

201273

311273

卷之三

211.27.5

211273

21273

331 176

221833

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15
200	195	195	195	194	196	195	195	194	195	195	194
198	195	195	187	187	191	187	185	187	188	186	192
202	195	197	183	184	190	194	180	183	184	178	182
128	121	XXX	XXX	XXX	XXX	XX:	XXX	XXX	129	XXX	117
XXX	119	121	XXX								
XXX											
101	087	067	057	091	074	086	092	094	087	087	084
XXX	088	086	089								
XXX	087	082	092								
067	062	058	058	060	066	055	056	054	055	056	061
XXX											
046	+044	+043	+042	+042	+042	+043	+044	+044	+048	+047	+045
048	+047	+047	+044	+044	+044	+045	+045	+046	+050	+049	+050
053	+051	+049	+046	+046	+046	+047	+047	+048	+052	+051	+051
066	+054	+053	+049	+049	+049	+049	+049	+050	+054	+054	+054
059	+057	+057	+055	+055	+053	+052	+051	+052	+055	+057	+057
059	+059	+059	+057	+057	+055	+052	+053	+055	+057	+058	+058
059	+059	+059	+057	+057	+055	+053	+055	+055	+060	+060	+060
061	+059	+058	+057	+057	+056	+056	+055	+054	+057	+056	+056
061	+059	+058	+057	+058	+057	+052	+053	+054	+056	+057	+057
000	+001	+001	-000	+000	+000	+000	+000	+003	+002	-000	-001
001	-000	+001	-001	+000	+000	-000	-000	+003	+002	-000	-000

221273

884-885

231273

231273

卷之三

241273

2-14-2020

241273

241273

251273

CABA UW

GMT	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	
D 200	356 359	008 007	007 007	356 354	360 351	358 002	005 010	005 008	022 030	026 018	015 018	008 011	012 016
D 80	352 002	011 007	008 008	350 345	343 344	350 001	007 007	360 002	018 031	018 009	006 006	002 001	003 011
D 10	342 001	009 004	004 004	334 328	327 331	343 002	354 353	357 014	026 006	358 355	351 355	360 360	005 005
F 200	061 085	080 077	065 059	060 056	C71 082	079 091	089 082	081 073	057 062	072 082	101 102	095 095	096 096
F 16JZ0	XXX XXX												
F 20Z0	XXX XXX												
F 80	041 066	060 050	036 035	041 040	057 055	050 063	061 057	055 051	038 043	051 053	071 071	068 068	067 067
F 4JZ0	XXX XXX												
F 2JZ0	XXX XXX												
F 10	023 034	031 022	012 013	019 018	031 029	024 033	029 030	025 023	016 020	024 023	034 033	036 033	033 033
F 2	XXX XXX												
T 200	*042 +039	+040 +041	+041 +040	+040 +039	+039 +036	+037 +037	+037 +035	+035 +033	+032 +032	+033 +035	+039 +040	+038 +037	
T 160	+045 +042	+038 +042	+043 +043	+044 +043	+043 +042	+041 +039	+039 +038	+038 +036	+035 +035	+036 +037	+041 +042	+040 +039	
T 120	+047 +045	+040 +041	+046 +046	+047 +046	+045 +043	+042 +042	+042 +041	+041 +040	+039 +038	+038 +037	+043 +043	+043 +043	+039 +039
T 80	+050 +051	+050 +049	+048 +049	+049 +049	+049 +047	+045 +044	+045 +044	+044 +043	+042 +042	+042 +041	+043 +043	+043 +043	+041 +041
T 40	+052 +050	+045 +049	+051 +051	+051 +051	+049 +047	+047 +046	+047 +047	+045 +045	+045 +045	+044 +044	+043 +043	+044 +043	+043 +043
T 20	+054 +052	+046 +049	+051 +051	+051 +051	+049 +047	+047 +047	+048 +047	+046 +046	+045 +045	+043 +043	+042 +042	+043 +043	+045 +045
T 9	+054 +052	+047 +046	+046 +046	+046 +046	+046 +046	+047 +047	+047 +047	+046 +046	+045 +045	+043 +043	+042 +042	+043 +043	+045 +045
T 2	+055 +053	+047 +047	+046 +046	+045 +044	+042 +043	+043 +045	+047 +047	+045 +045	+045 +045	+044 +043	+042 +042	+043 +043	+045 +046
	*	*	*	*	*	*	*	*	*	*	*	*	*
CT 200	+003 +003	+004 +004	+000 +000	-000 -000	-000 -000	+000 +000	+000 +000	-000 -000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000
CT 20	+003 +002	-004 -001	+004 +001	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000

251273

251273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15		
014 018	024 029	032 023	023 024	027 021	C19 015	021 021	024 025	026 025	015 015	006 010	006 006	003 360	D 200
012 016	025 028	035 025	017 016	021 013	015 008	012 017	022 024	020 016	014 014	003 003	002 360	355 356	D 80
006 011	020 020	027 020	010 009	010 005	006 354	004 010	015 021	018 012	002 002	357 357	356 356	350 350	D 10
089 094	085 083	081 089	088 090	092 091	090 091	092 091	080 068	067 062	065 062	057 064	066 073	077 077	F 200
XXX XXX	F 160Z0												
057 060	058 059	055 064	058 060	058 059	054 057	058 058	048 044	049 044	045 053	043 046	053 056	064 064	F 80
XXX XXX	F 40Z0												
028 030	033 030	028 035	027 026	026 022	026 026	028 024	026 035	033 031	036 031	030 032	031 031	035 035	F 2020
XXX XXX	F 10												
*036 +032	+032 +032	+032 +032	+033 +033	+035 +036	+038 +038	+037 +034	+037 +039	+036 +036	+034 +033	+034 +034	+035 +035	+038 +040	+041 +042
+038 +036	+035 +035	+035 +035	+036 +037	+038 +040	+039 +039	+036 +039	+038 +036	+036 +036	+038 +037	+039 +041	+043 +043	+044 +046	T 200
+040 +039	+038 +038	+037 +037	+039 +039	+041 +041	+040 +040	+040 +040	+040 +040	+040 +040	+040 +040	+040 +040	+044 +046	+046 +046	T 160
+043 +042	+041 +040	+040 +041	+040 +040	+040 +041	+040 +041	+040 +041	+042 +043	+043 +043	+044 +044	+044 +044	+046 +047	+049 +049	T 120
+045 +044	+044 +043	+042 +044	+044 +042	+042 +042	+043 +043	+042 +042	+045 +045	+046 +047	+047 +048	+048 +049	+050 +050	+051 +051	T 80
+045 +046	+045 +044	+043 +043	+042 +042	+042 +042	+043 +043	+042 +042	+045 +045	+046 +047	+047 +048	+048 +049	+050 +052	+053 +053	T 40
+046 +046	+044 +044	+045 +045	+043 +043	+042 +042	+043 +043	+042 +042	+044 +044	+047 +047	+049 +050	+050 +051	+052 +052	+053 +053	T 20
+046 +046	+046 +044	+044 +044	+044 +043	+043 +042	+042 +042	+042 +042	+044 +044	+047 +047	+049 +050	+050 +051	+053 +053	+054 +054	T 9
+046 +046	+046 +044	+044 +044	+044 +043	+043 +042	+042 +042	+042 +042	+044 +044	+045 +045	+046 +046	+052 +052	+053 +053	+054 +054	T 2
*000 -000	+000 +000	+000 +000	+000 +000	-000 -000	+000 +000	+000 +000	+000 +000	+000 +000	+000 +000	-000 -000	-000 -000	-000 -000	CT 200
-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	CT 20

261273

261273

CABA UW

03-04	15-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03	
D 200	753 003	002 011	019 014	003 011	015 016	003 332	313 269	260 258	235 224	217 220	227 224	225 223	
D 80	346 356	003 015	020 016	014 016	016 360	335 303	264 247	268 279	254 238	221 219	216 213	220 218	
D 10	343 346	001 014	013 013	010 011	011 328	295 244	234 247	270 281	243 216	214 218	210 214	205 205	
F 200	068 063	072 061	057 054	050 048	035 023	019 018	021 027	029 024	037 043	052 052	063 063	071 074	
F 160Z0	XXX XXX												
F 80	053 053	053 053	053 053	053 053	040 040	041 041	042 042	043 043	044 044	045 045	046 046	047 047	F 20Z0
F 40Z0	XXX XXX												
F 20Z0	XXX XXX												
F 10	028 028	026 025	023 022	022 021	018 012	009 011	011 020	020 026	016 014	014 021	022 026	028 028	
F 2	XXX XXX												
T 200	*041 +042	+042 +040	+040 +042	+042 +042	+042 +042	+041 +039	+041 +043	+043 +040	+038 +036	+037 +035	+035 +035	+034 +034	+031 +031
T 160	+044 +045	+044 +044	+042 +042	+042 +042	+044 +044	+045 +045	+046 +046	+046 +046	+040 +039	+038 +038	+037 +037	+036 +036	+035 +035
T 120	+041 +041	+041 +041	+044 +044	+045 +045	+046 +046	+044 +044	+046 +046	+046 +046	+041 +041	+038 +038	+041 +041	+040 +040	+038 +038
T 80	+041 +041	+051 +050	+050 +050	+050 +050	+050 +050	+050 +050	+048 +048	+048 +048	+044 +044	+041 +041	+040 +040	+038 +038	+034 +034
T 40	+041 +041	+051 +050	+050 +050	+048 +048	+049 +049	+050 +050	+048 +048	+044 +044	+043 +043	+040 +040	+037 +037	+036 +036	+033 +033
T 20	+040 +040	+050 +050	+050 +050	+048 +048	+049 +049	+050 +050	+048 +048	+044 +044	+043 +043	+040 +040	+037 +037	+029 +029	+027 +027
T 9	+048 +048	+047 +047	+048 +048	+045 +045	+044 +044	+044 +044	+040 +040	+039 +039	+034 +034	+033 +033	+037 +037	+026 +026	+023 +023
T 2	+048 +047	+048 +048	+045 +045	+044 +044	+043 +043	+044 +044	+040 +040	+039 +039	+034 +034	+037 +037	+035 +035	+026 +026	+023 +023
CT 200	+000 +000	+000 +000	-000 -000	+000 +000	+000 +000	-000 -000	+000 +000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000	-000 -000
CT 20	-000 -000	-000 -000											

261273

261273

271273

CABA UW

GMT	19-16	19-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03												
2400	210	226	220	217	231	233	239	248	257	264	258	257	253	273	278	266	251	245	243	247	240	235	237	
D 80	215	220	221	219	222	220	223	230	233	234	232	228	227	229	231	220	214	212	213	219	207	208	211	
D 10	229	224	224	221	225	224	227	234	234	234	233	229	229	227	231	231	219	215	211	215	220	204	211	211
F 000	091	092	094	088	086	059	094	092	088	084	076	076	073	071	072	060	050	060	063	073	076	069	080	085
F 160Z0	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 2020	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx											
F 50	02	02	02	02	02	02	068	068	067	069	068	065	061	053	057	057	056	056	057	057	060	061	071	076
F 4020	xxx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx										
F 2020	xxx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx										
F 10	054	051	052	045	046	046	048	047	045	040	034	038	038	042	037	035	036	035	037	037	036	045	048	
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx											
F 200	+025	+039	+041	+042	+043	+045	+048	+051	+055	+056	+054	+055	+059	+061	+065	+066	+061	+060	+059	+062	+068	+065	+071	
F 160	+040	+041	+042	+044	+044	+046	+047	+048	+049	+051	+050	+051	+054	+057	+063	+064	+055	+054	+054	+054	+056	+055	+061	
F 120	+042	+043	+044	+045	+045	+047	+043	+049	+049	+050	+050	+051	+051	+051	+052	+056	+052	+052	+052	+052	+052	+053	+055	
T 80	+045	+045	+046	+048	+049	+049	+050	+050	+051	+052	+052	+052	+052	+053	+053	+053	+053	+053	+053	+053	+053	+053	+055	
T 40	+047	+048	+049	+050	+050	+051	+051	+052	+052	+053	+053	+054	+054	+054	+054	+055	+055	+054	+054	+054	+054	+054	+056	
T 20	+048	+049	+050	+051	+052	+052	+053	+053	+054	+054	+054	+054	+055	+055	+055	+055	+055	+056	+056	+056	+056	+057	+057	
T 9	+048	+049	+050	+051	+052	+053	+053	+054	+054	+054	+054	+055	+055	+055	+055	+056	+056	+056	+057	+057	+057	+057	+057	
T 2	+049	+049	+050	+051	+052	+053	+053	+054	+054	+055	+055	+055	+056	+056	+056	+056	+056	+056	+057	+057	+057	+057	+057	
C 1200	-000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+002	
C 1200	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	

271273

271273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15												
232	256	241	237	235	241	239	228	227	230	231	229	225	228	227	222	221	220	218	220	221	D 200		
207	21c	223	214	217	221	217	207	208	211	216	219	218	211	213	214	215	209	207	210	211	D 80		
206	223	226	215	219	212	217	205	207	212	217	220	217	219	212	213	216	211	212	214	212	D 10		
092	104	105	113	115	117	120	107	107	118	102	047	091	045	094	093	089	094	099	102	110	108	F 200	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 160Z0												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 120Z0												
080	071	071	072	072	071	073	073	076	076	075	069	069	074	073	067	066	071	077	080	081	086	089	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 80												
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 40Z0												
052	045	047	044	043	044	045	045	047	049	046	046	047	046	046	048	046	049	052	055	057	059	F 20	
xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	F 10												
F 2	+077	+067	+072	+072	+062	+071	+069	+059	+060	+058	+058	+058	+058	+058	+058	+058	+058	+059	+061	+063	+062	+063	+064
+062	+066	+063	+062	+061	+061	+061	+068	+058	+058	+057	+057	+057	+057	+059	+059	+060	+060	+062	+062	+062	+063	+065	
+055	+055	+057	+057	+057	+057	+057	+058	+058	+058	+057	+057	+057	+057	+059	+059	+060	+060	+061	+062	+063	+064	+065	
+056	+056	+057	+057	+058	+058	+058	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+060	+061	+062	+063	+067	
+057	+057	+058	+058	+058	+058	+058	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+060	+061	+062	+063	+068	
+058	+058	+058	+058	+058	+058	+058	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+059	+060	+061	+062	+063	+068	
+059	+059	+060	+060	+061	+061	+061	+060	+060	+060	+061	+061	+061	+061	+061	+061	+061	+061	+062	+063	+064	+065	+068	
+058	+059	+060	+060	+061	+061	+061	+062	+062	+062	+062	+063	+063	+063	+063	+063	+063	+063	+064	+065	+067	+068	+070	
+058	+060	+060	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+061	+062	+063	+064	+065	+067	
+058	+060	+060	+061	+061	+061	+061	+062	+062	+062	+062	+062	+062	+062	+062	+062	+062	+062	+063	+064	+065	+067	+072	
+004	+001	+01	+001	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	+000	CT 200
-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	-000	CT 20

271273

271273

271273	281273	281273	CABA UW
0400	242	243	225
D 80	211	215	213
D 10	212	217	216
F 000	115	116	117
F 160Z0	xxx	xxx	xxx
F 2020	xx	xx	xx
F 50	080	080	080
F 4020	xxx	xx	xx
F 2020	xxx	xx	xx
F 10	052	052	052
T 200	+065	+065	+066
T 160	+066	+067	+068
T 120	+068	+068	+069
T 80	+072	+072	+072
T 40	+071	+071	+072
T 20	+071	+072	+073
T 9	+072	+072	+073
T 2	+072	+073	+074
C 1200	+000	+000	+000
C 1200	-000	-000	-000

281273

281273

03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15										
231	244	239	240	242	237	229	230	226	225	221	231	233	230	229	228	227	226	224	225	227	D 10
230	227	24	228	232	234	227	240</td														

281273

281273

291273

CARAVAN

291273														
03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15			
214 210 206 206 210 209 207 210 208 204 204 203 198 202 205 205 198 199 203 200 200 197 196 201	D200													
205 203 200 203 206 208 204 208 211 205 206 204 200 201 204 205 196 196 198 202 201 200 196 198	D 80													
207 205 204 208 210 214 210 213 216 211 212 208 207 206 209 212 199 195 205 209 207 207 199 202	D 10													
100 099 100 100 098 101 090 .084 103 103 108 093 099 093 090 100 092 089 093 084 081 074 079 081	F200													
xxx	F160													
xxx	F120													
070 078 079 077 080 080 071 078 094 091 099 086 093 090 085 092 083 077 083 083 074 066 068 071	F 80													
xxx	F 40													
xxx	F 20													
051 050 051 049 056 050 046 054 062 064 071 061 066 069 065 069 065 062 064 064 057 049 054 053	F 10													
xxx	F 2													
*041 +039 *039 +039 +034 +034 +032 +027 +022 +018 +017 +016 +015 +011 +010 +012 +012 +010 +006 +004 +002 +000 +003	T200													
+043 +040 +041 +041 +034 +032 +035 +030 +025 +021 +020 +019 +018 +014 +013 +014 +015 +015 +013 +008 +006 +004 +003 +005	T160													
+045 +043 +043 +044 +036 +035 +039 +034 +027 +024 +024 +023 +022 +017 +017 +018 +018 +017 +016 +011 +009 +007 +005 +008	T120													
+047 +045 +046 +048 +046 +044 +043 +038 +031 +028 +028 +028 +027 +026 +021 +022 +022 +021 +019 +015 +013 +013 +013 +017	T 80													
+050 +049 +048 +049 +043 +048 +046 +041 +034 +032 +031 +031 +030 +025 +045 +027 +026 +025 +023 +020 +017 +017 +017 +021	T 40													
+051 +049 +050 +051 +051 +050 +048 +043 +035 +034 +033 +033 +032 +028 +087 +029 +028 +027 +025 +022 +020 +019 +019 +023	T 20													
+052 +050 +050 +056 +052 +050 +048 +044 +035 +034 +034 +034 +033 +028 +028 +030 +029 +028 +027 +023 +021 +020 +020 +024	T 9													
+052 +050 +051 +052 +045 +046 +048 +044 +035 +035 +035 +035 +035 +031 +031 +030 +028 +024 +022 +021 +022 +025	T 2													
* * *	*													
+000 -0100 +002 +004 +013 +005 +004 -001 +000 +000 +000 -000 -000 -000 +000 +000 -001 -000 -002 -000 +000 -000 -000	CT200													
-000 -000 +002 -001 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -000 -002 -001 -000 -000 -000	CT 20													

291273

281273

30127

S. A. B. S. M.

301273

301223 311223 322400

344237

五〇三

GMT	19-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	00-01	01-02	02-03
D 200	222	220	231	235	201	235	240	242	252	265	284	295
D 80	213	212	227	228	213	229	233	231	238	240	244	251
D 10	215	215	230	232	216	232	235	233	240	245	251	256
F 20J	064	074	074	075	050	082	075	075	074	073	070	059
F 16U2J	XXX											
F 12U2J	XXX											
F 8U	060	063	058	067	058	066	064	066	064	058	055	053
F 40ZU	XXX											
F 20ZU	XXX											
F 10	041	044	043	050	050	050	048	050	049	043	039	034
F 2	XXX											
T 20U	-002	-001	-001	-001	+000	+004	+006	+009	+012	+018	+025	+028
T 16U	+001	+004	+005	+005	+006	+006	+008	+010	+011	+014	+021	+028
T 12U	+006	+007	+007	+008	+008	+009	+011	+012	+013	+014	+016	+023
T 8U	+009	+009	+010	+010	+010	+011	+013	+014	+015	+016	+017	+018
T 4U	+011	+012	+012	+013	+013	+014	+015	+016	+017	+018	+022	+028
T 2U	+013	+013	+014	+014	+014	+015	+016	+017	+018	+019	+020	+021
T 4	+013	+014	+014	+015	+015	+016	+017	+018	+019	+020	+021	+022
T 2	+014	+015	+015	+016	+016	+016	+018	+019	+020	+021	+022	+022
C 2T20U	-000	-001	-002	-004	-003	-000	+000	+000	+000	+000	+003	+008
C 2T	-000	-000	-000	-000	-000	-000	-000	-000	-000	-001	+001	+007

311273

311273

311273

311-873

CARAVAN

ORT	12-16	16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24									
D 200	020	027	031	030	030	033	034	036	037	038	030	039	047	064	079	084	097	094
D 80	019	032	040	042	040	100	131	162	171	175	173	175	175	172	166	165	155	155
D 10	013	013	108	157	158	161	159	164	148	164	196	184	173	172	174	167	157	165
F 200	041	049	046	043	040	037	036	032	032	029	030	028	024	023	023	028	031	031
F 1600	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx								
F 1200	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx								
F 80	034	036	024	015	010	009	012	026	015	019	018	026	027	024	024	025	027	025
F 400	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx								
F 200	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx								
F 10	012	011	022	020	024	024	019	024	015	028	019	025	024	023	022	025	025	022
F 2	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx	xxx								
T 200	+035	+036	+035	+035	+035	+034	+033	+032	+033	+030	+028	+025	+021	+019	+014	+016	+008	+011
T 160	+036	+033	+037	+037	+037	+036	+035	+035	+033	+031	+028	+022	-001	-010	-020	-019	-019	-023
T 120	+042	+041	+037	+036	+037	+035	+033	+025	+022	+020	+004	-026	-020	-019	-018	-018	-017	-016
T 80	+045	+043	+036	+030	+024	+019	+014	-024	-022	-025	-025	-023	-019	-017	-016	-015	-015	-014
T 40	+047	+044	+027	+007	+027	+027	-026	-026	-021	-023	-022	-020	-017	-015	-014	-014	-012	-014
T 20	+044	+042	+012	-023	-026	-026	-024	-024	-020	-021	-019	-016	-014	-013	-012	-011	-011	-011
T 9	+042	+039	+005	-022	-026	-025	-024	-023	-019	-020	-021	-018	-015	-013	-012	-011	-011	-011
T 2	+032	+021	-006	-024	-025	-024	-023	-023	-019	-020	-020	-017	-014	-012	-011	-011	-010	-011
*																		
CT 200	-000	-000	-000	+000	+000	-001	-001	-001	+002	+001	+001	+001	+000	-000	-000	-000	+000	-002
CT 20	-000	-000	-000	-000	+000	-001	-001	-002	+001	-000	+000	+000	-000	-001	-001	-000	-000	-000